


Plantation Farm

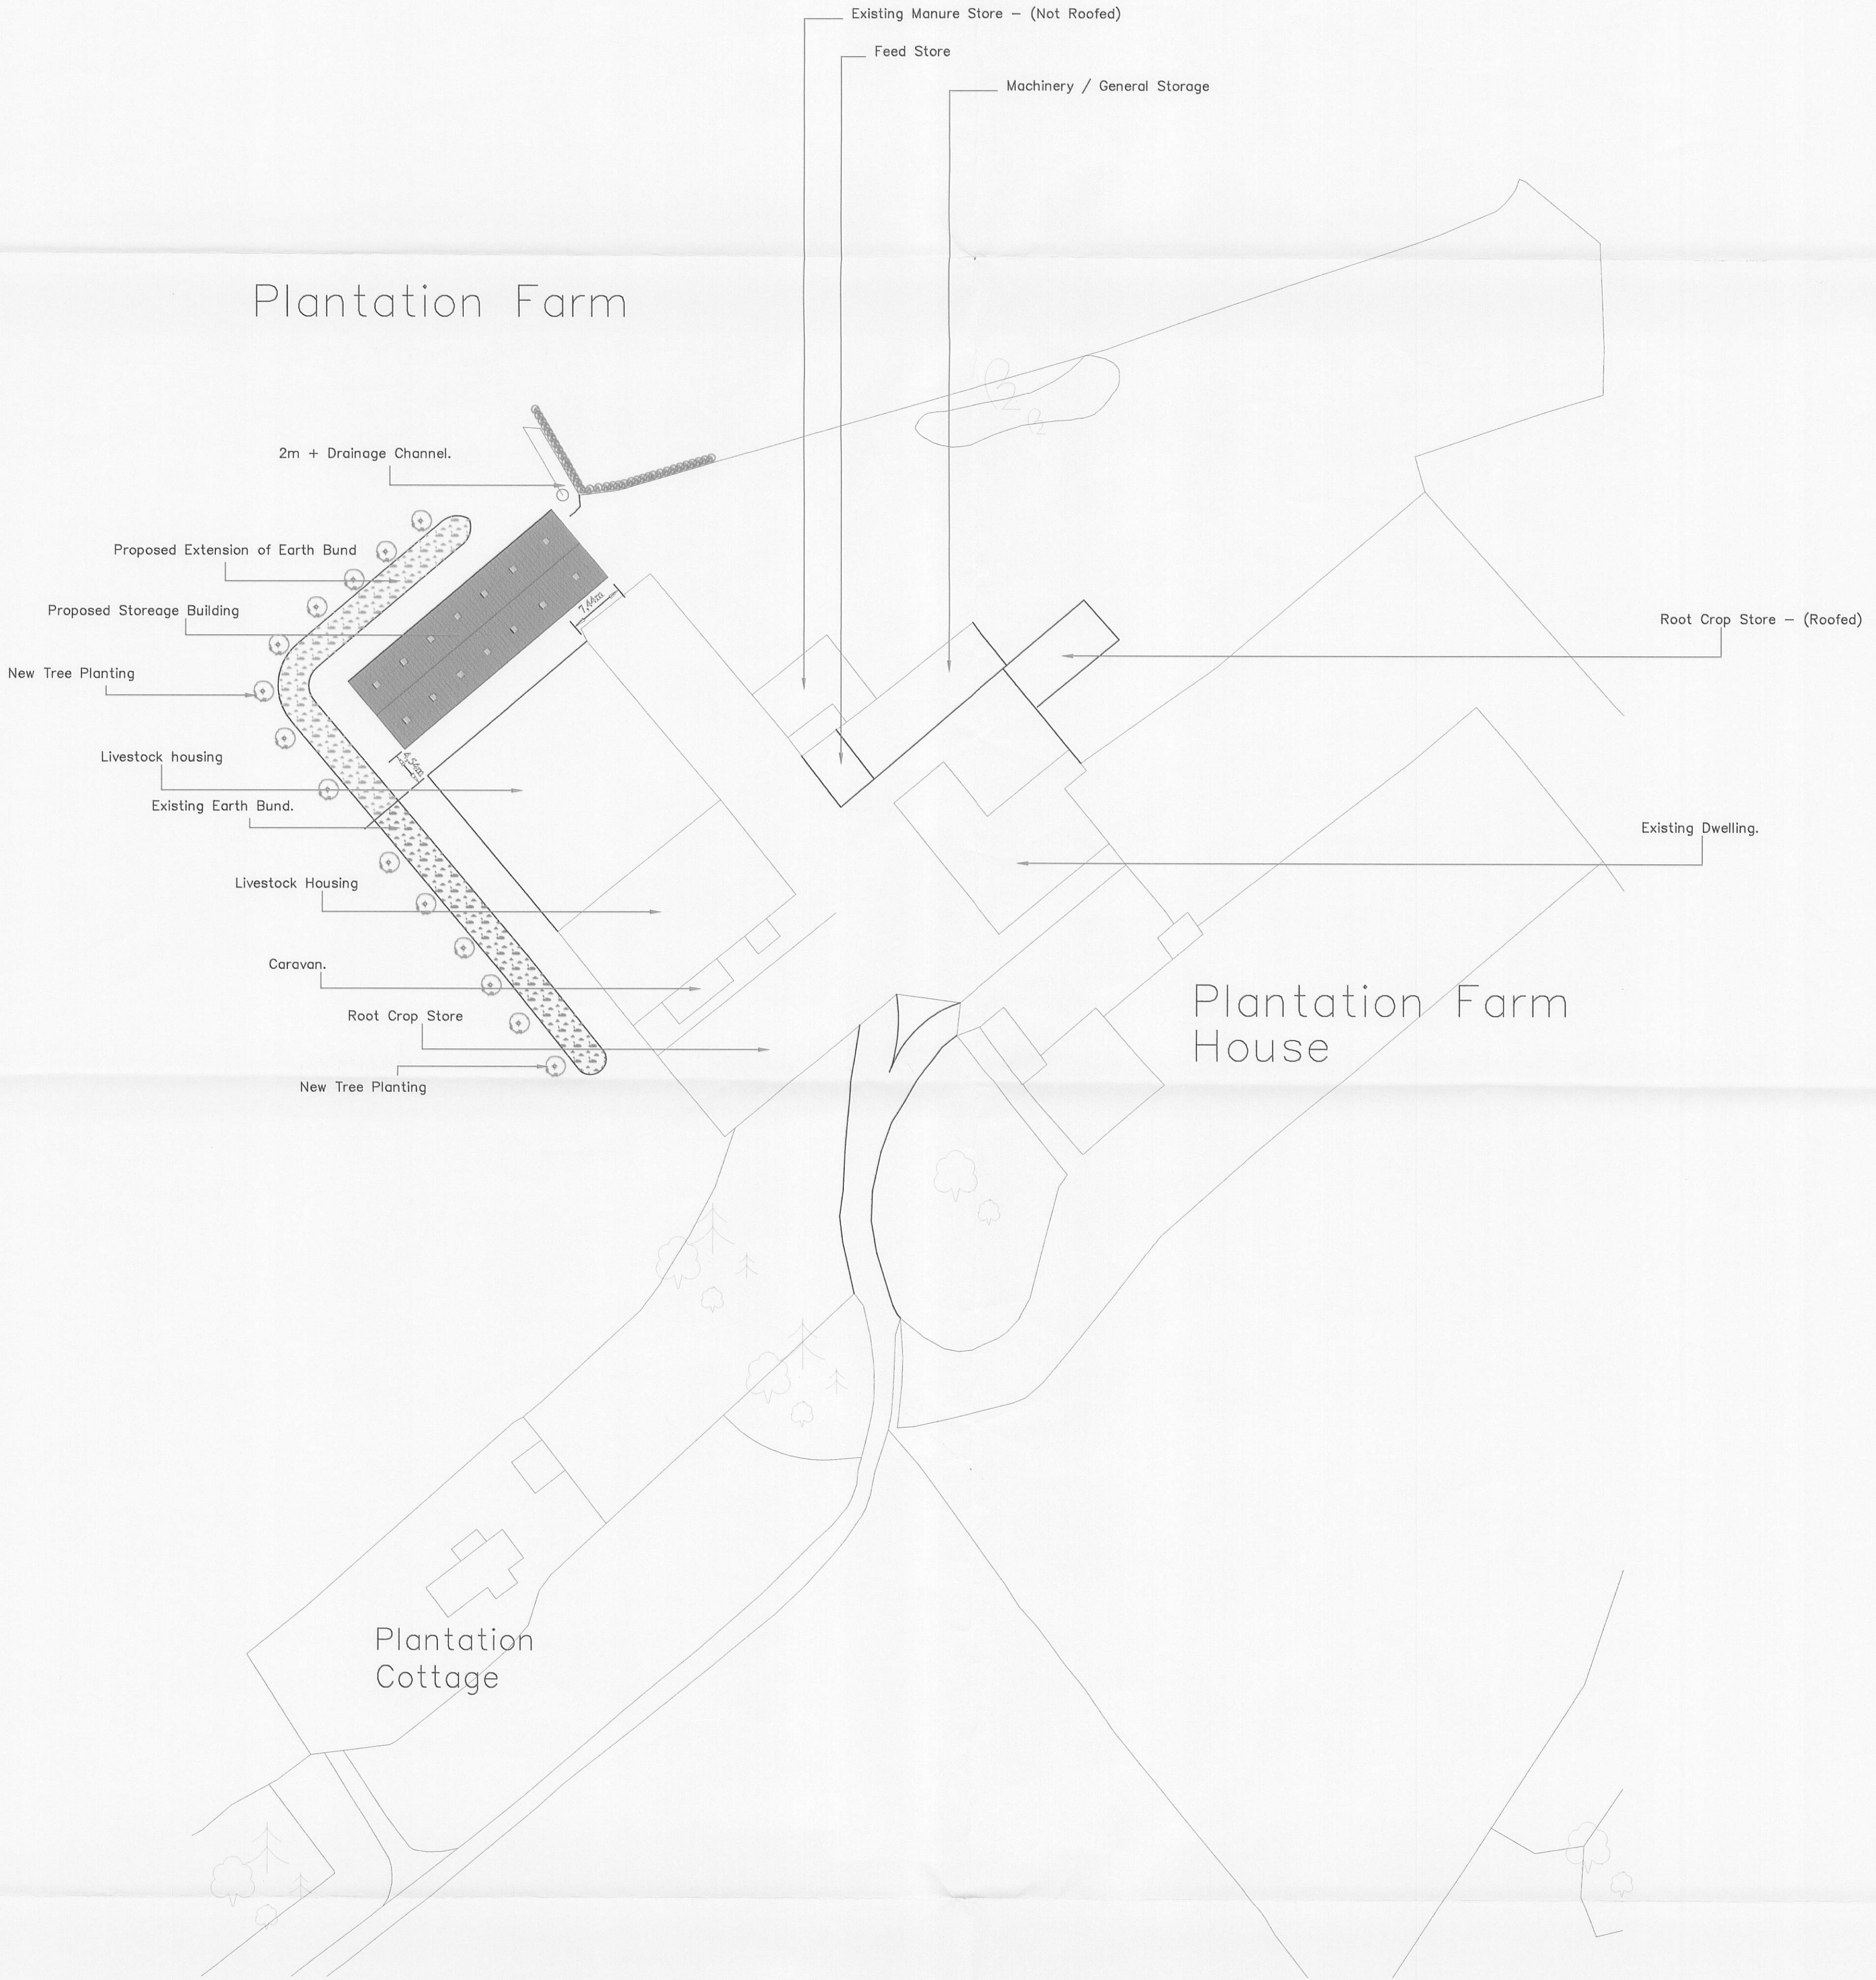

Tree Planting Schedule

Trees:

Native specimen trees 1.2m standards, staked and planted in the planting compost. (8-10cm) 4.5m + spacing.

14 Number trees comprising the following

Betula pendula (birch)
Fagus sylvatica (beech)
Cedrus deodora (Cedar)

Hedging:

45 - 90cm transplants at 45cm centre in a double staggered row -

Hedgerow mix :-

-Blackthorn/Hawthorn 50%
-Hazel/Field maple/Holly 35%
-Crab apple/Guelder rose/Dog rose/wild Privet/Honey suckle 15%.

320110477P

J.HADFIELD.
ENGINEERING,SURVEYING.

Springs House, Chipping, Lancashire. PR3 2GQ.
Tel 07740 929096. Fax 08708 362185

Clients Details,

Mr A. KAY

Project Details,

SITE PLAN

Project Address,

PLANTATION FARM
CHAIGLEY
CLITHEROE
BB7 3LX

Project Number,

219/202

Date,

APR/2011

Scale,

1:500

By,

JH

DO NOT SCALE THIS DRAWING. CHECK ALL DIMENSIONS ON SITE

THIS DRAWING IS PROTECTED BY COPYRIGHT. IT MAY NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS
FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM J.HADFIELD, ENGINEERING/SURVEYING.