


VELUX curved and flat glass rooflight

Options and pricing

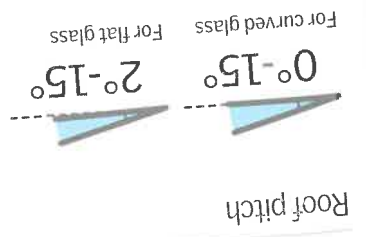

U-VALUES

Combining a **curved glass top cover** with either an electrically operated base unit or a fixed base unit will give you a value of 0.72 Urc, ref300.

Combining a **flat glass top cover** with either an electrically operated base unit or a fixed base unit will give you a value of 0.79 Urc, ref300.

Curved and flat glass rooflight

External frame size including kerb (nominal w x h) cm

Structural openings (nominal w x h) cm

Code	Description	Fixed	CFP 00730V	VELUX INTEGRA®	CVP 06730V	Accessories	ZCE 0015	ZZZ 210
ISD 1093	Curved glass top cover.	£392	£420	£442	£508	£552	£585	£718
ISD 2093	Flat glass top cover.	£306	£328	£345	£397	£431	£457	£561
NOW CHOOSE A BASE, EITHER FIXED OR VELUX INTEGRA®								
Fixed								
CFP 00730V	Fixed flat roof window base with double glazed insulating glass unit featuring laminated inner pane for safety.	£283	£302	£318	£366	£398	£422	£486
VELUX INTEGRA®	Electrically operated flat roof window base with double glazed insulating glass unit featuring laminated inner pane for safety.	£683	£702	£718	£766	£798	£822	£886
CVP 06730V	Electrically operated flat roof window base with double glazed insulating glass unit featuring laminated inner pane for safety.	£909						
Accessories								
ZCE 0015	Extension kerb 150mm (for warm roof installations only).	£150	£157	£161	£177	£192	£196	£217
ZZZ 210	Frame fixing kit for roof material.	£34	£36	£37	£41	£44	£45	£50

• All roof windows have a delivery time of 2 days.

• Delivery time is in working days from receipt of orders placed before 4pm (UK) and 11.30am (NI).

2. NOW CHOOSE A BASE UNIT

- High-insulated PVC sash construction.
 - 2-layer low-energy pane.
 - Laminated pane on the inside.
 - Operable construction.
 - VELUX INTEGRA® convenient operation.
 - Integrated rain sensor for automatic closing during rain.
- ELECTRICALLY OPERATED BASE UNIT (CVP)**
- FIXED BASE UNIT (CFP)**
- High-insulated PVC sash construction.
 - 2-layer low-energy pane.
 - Laminated pane on the inside.



1. CHOOSE YOUR TOP COVER

- Curved glazing and glass-to-edge design ensure uninterrupted drainage.
 - Curved shape ensures a clearer view to the sky.
 - Up to 6mm scratch-free glazing.
 - Installation in 0-15° roof pitch.
 - Recommended option for visible installations.
- CURVED GLASS (ISD 1093)**
- FLAT GLASS (ISD 2093)**
- Flat glass design fits the roof line.
 - 4mm scratch-free glazing.
 - Installation in 2-15° roof pitch.

