
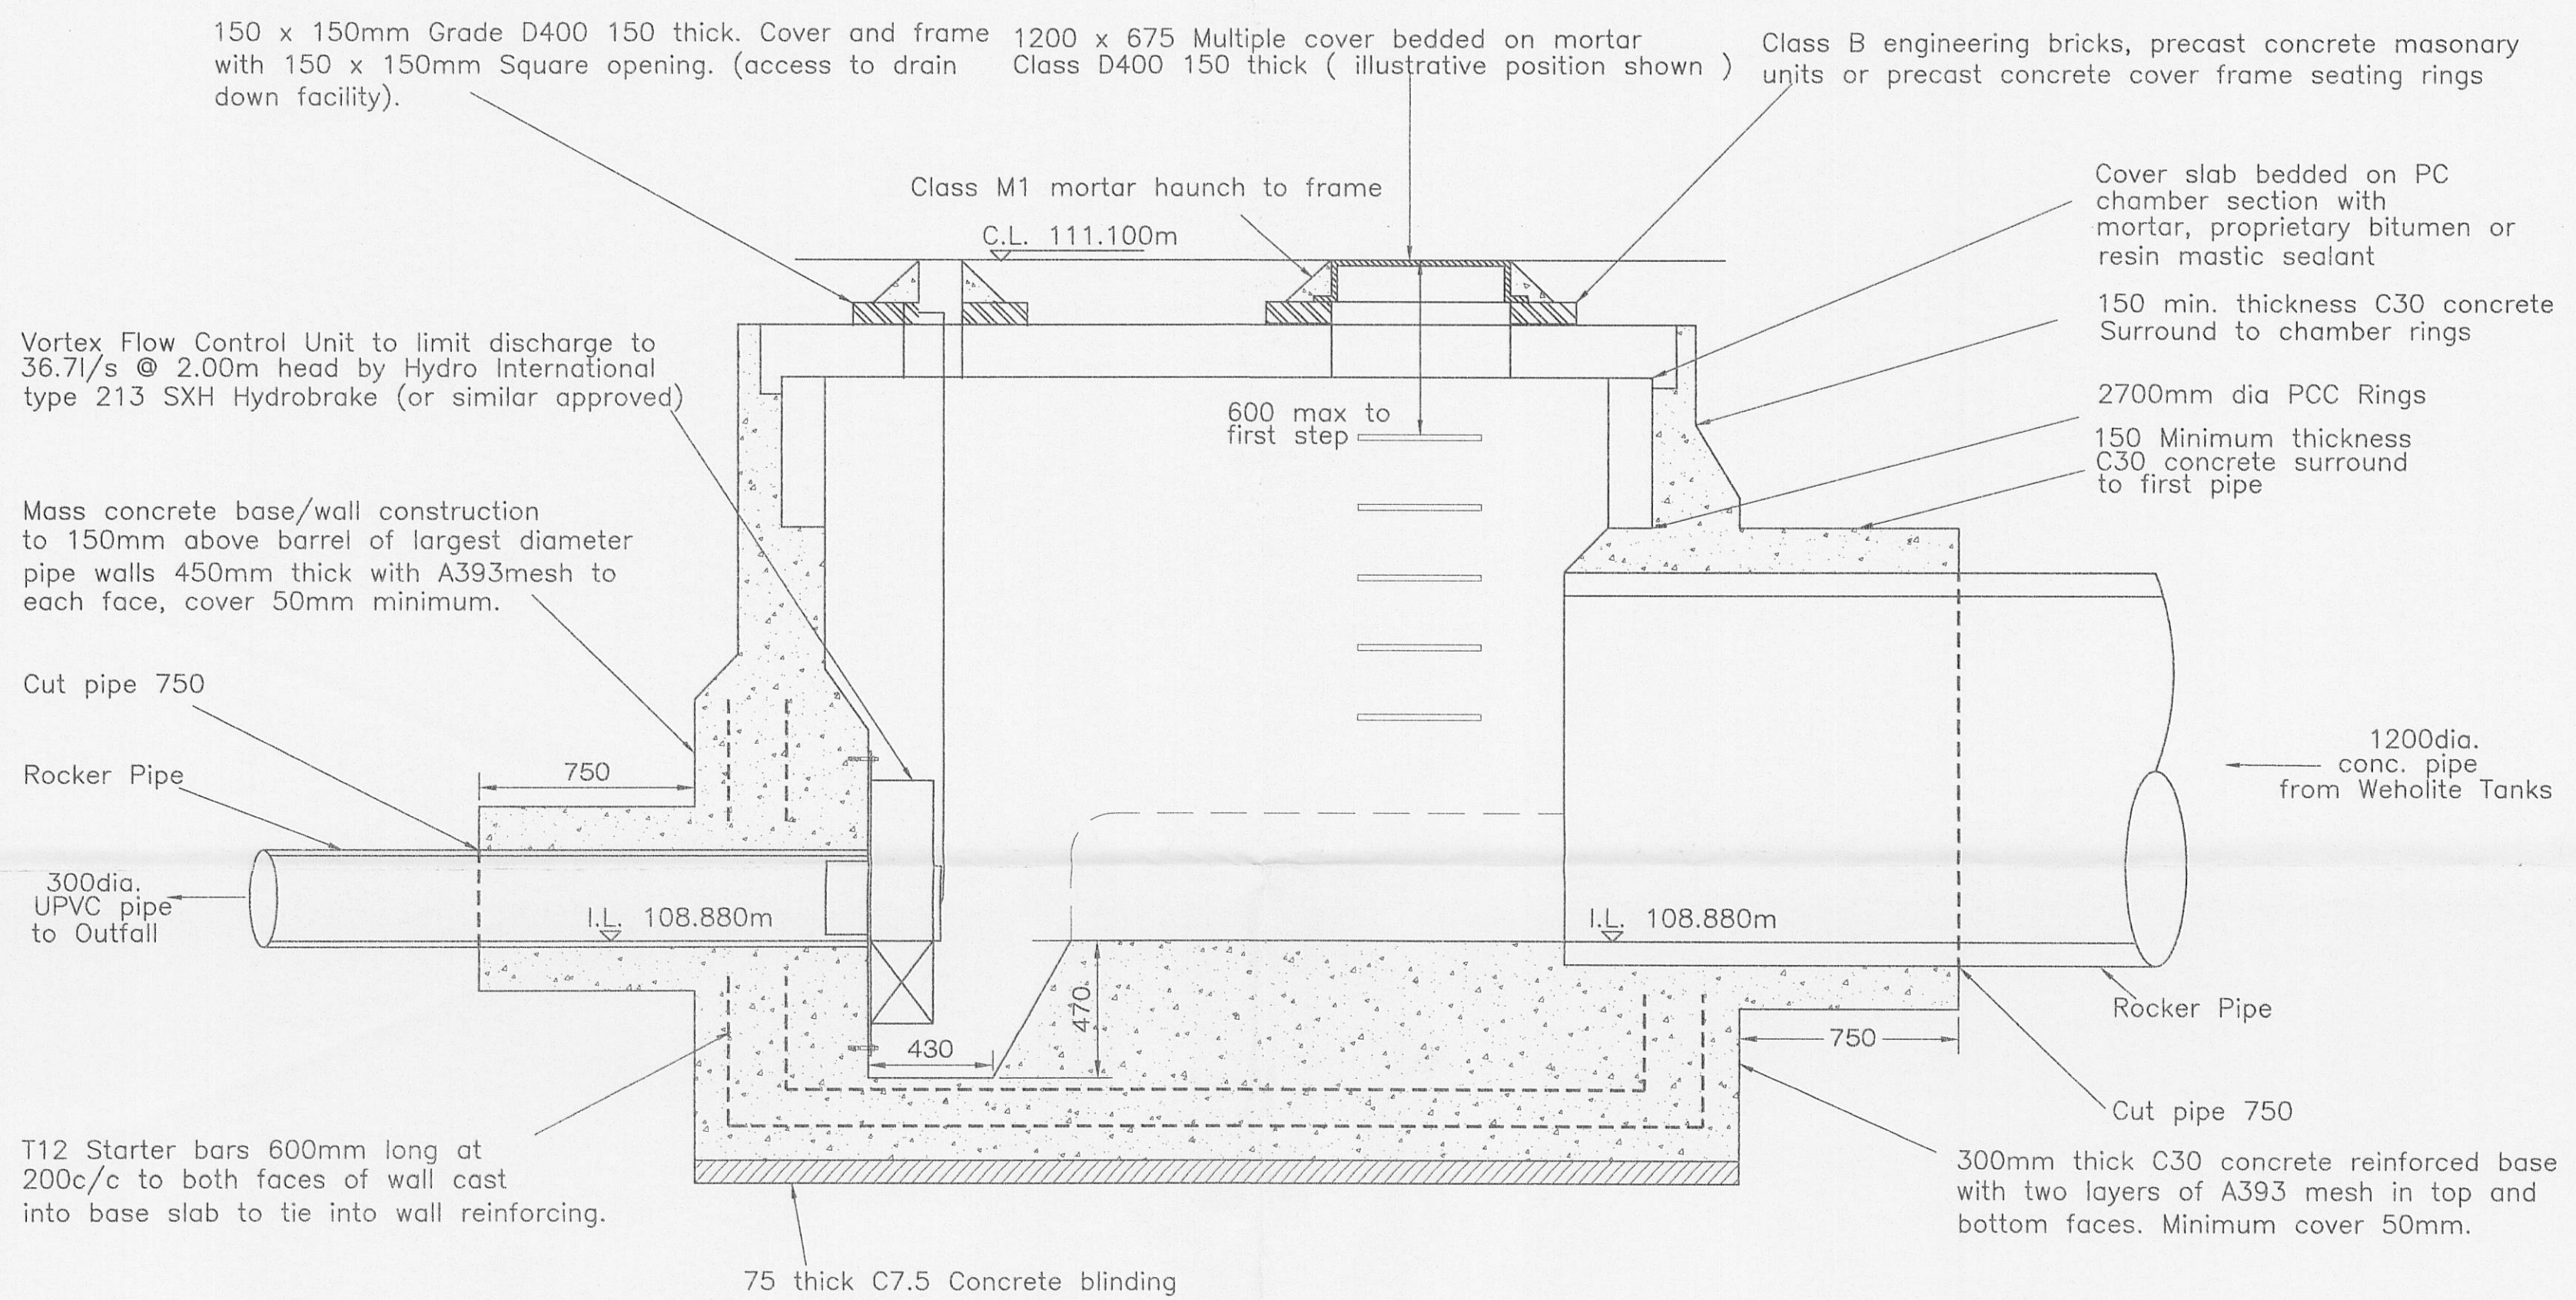


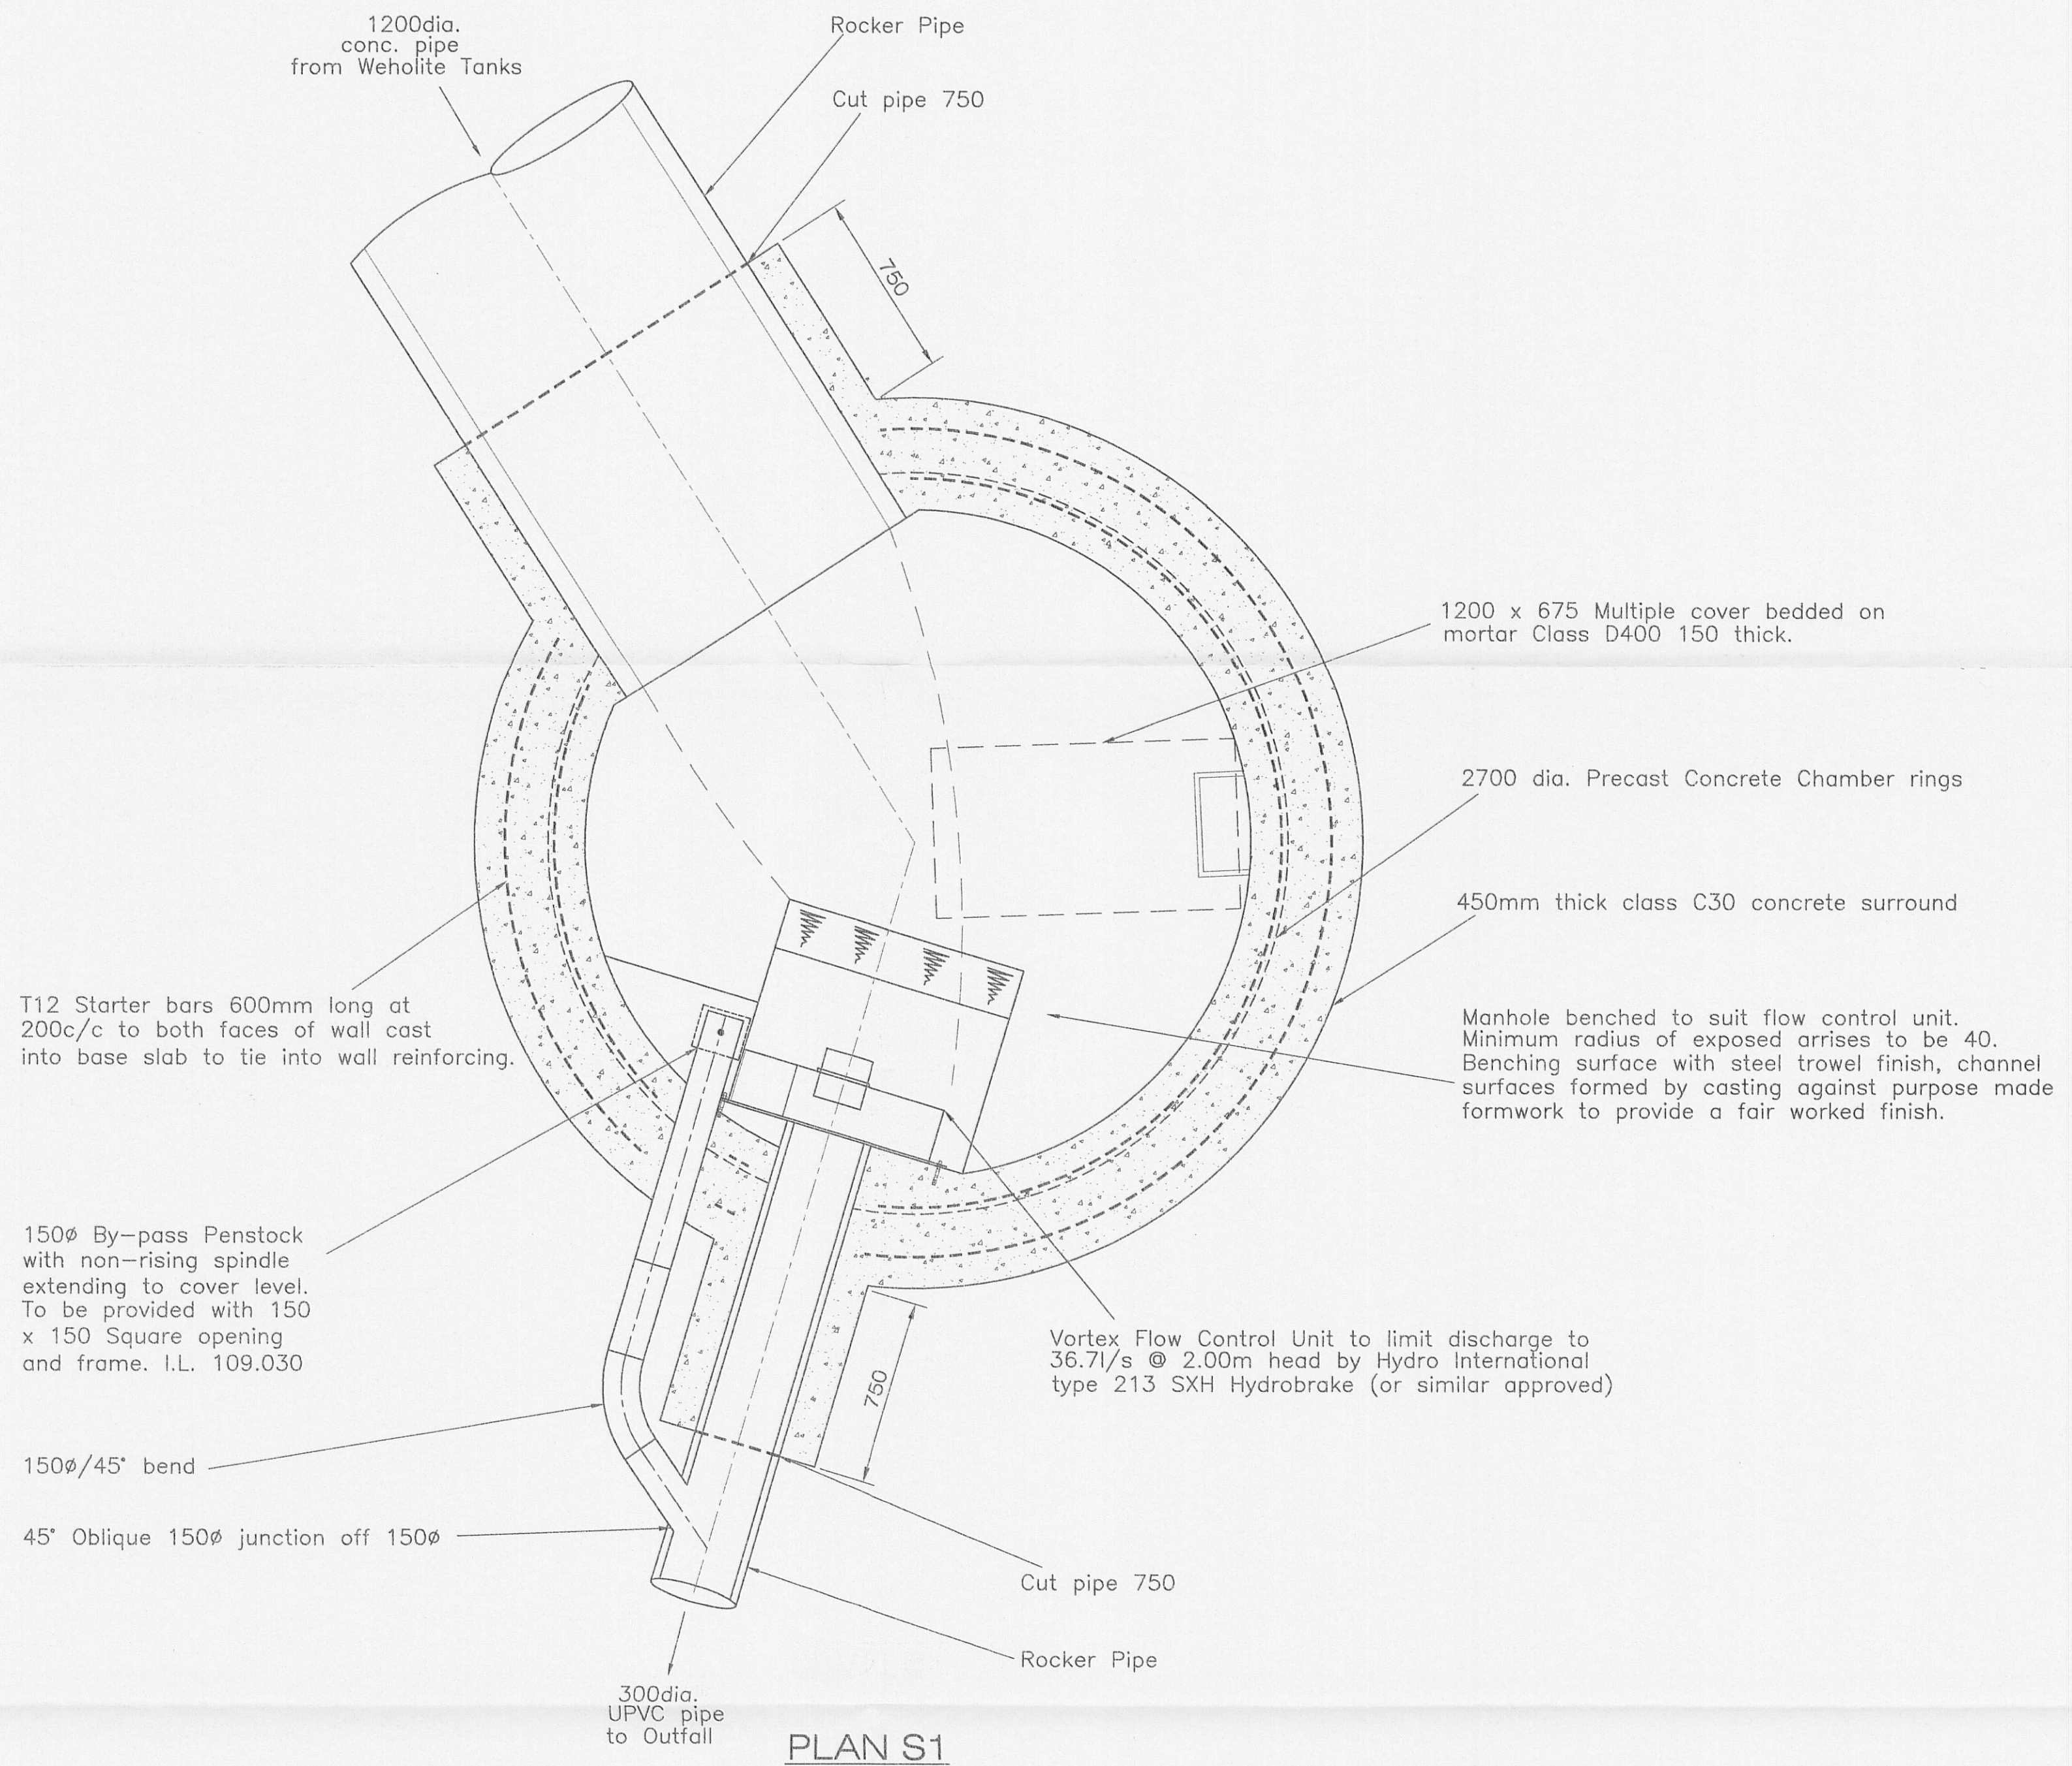

NOTES

- All dimensions are in millimetres unless shown otherwise.
- All works shall be in accordance with Sewers for Adoption, 6th Edition and United Utilities Standard Guidelines/Details.
- The flow control unit shall be manufactured by Hydro International, Shearwater House, Clevedon Hall Estate, Victoria Road, Clevedon, BS21 7RD. Refer to manufacturers instructions for installation. Tel: 01275 878371 Fax: 01275874979 www.hydro-international.biz
- The flow control units supplied shall pass a maximum flow of 36.7 l/s at a head of 2.00m.
- The flow control units supplied shall be fitted in accordance with the manufacturers instructions. The Contractor shall ensure the flow control unit does not require an outlet pipe greater than 300mmØ.

North Point	Project	Dilworth lane Longridge	
Quality Ass.	Client	Rowland Homes	
Original Site	Title	Control-Manhole Details S1	
Copy/Rev	Drawn	Checked By	Scale
13.01.12	JCM		1:20
Licence No. AL1000117866		Date	
All rights reserved		13.01.12	
3 Worsley Court MANCHESTER M28 3NJ Tel: 0161 703 8801 Fax: 0161 703 8879 manchester@ronsidefarrar.com		EDINBURGH BELLSHILL	
Drawing No.		Revision	
3891/7/1			