

SLIDING DOORS

CREATE A ROOM WITH A VIEW

Boasting many benefits when compared to a bi-folding door, supersized sliding patio doors continue to rise in popularity due to their massive glass areas which completely open a room or property, flooding it with light, and allowing you to enjoy views without the obstruction of vertical mullions.

The capabilities of our industry leading sliding door systems create more of a moving glass wall than a door. We offer various sliding door systems for a range of projects and budgets, and constantly evolve our product offering to ensure we remain on-trend & ahead of the market as demand grows for expansive glass doors, ease of operation and minimal sightlines.

All our doors are made with aluminium, making them lightweight, durable and practically maintenance-free. They can be powder coated in the colour of your choice to complement your home décor, and each system boasts its own unique features and benefits, as well as various opening configurations.

SLIM-LINE SLIDING DOORS

We offer two slender sliding doors. The XP Glide is available with a minimal sightline of just 20mm or with 35mm if preferred.

Our XP Slide 25 is a more cost-effective solution and is available with a slim sightline of just 25mm.

LIFT & SLIDE PATIO DOORS

Lift and slide patio doors are a great option also, the 'lift-and-slide' system means that as the handle is turned, the door is lifted on to ball bearings, making sliding the door easy. At the turn of a handle, the door can be secured in an open position ideal for allowing ventilation, or when children are playing in and around the doors.

The XP Infinite is our highest specification lift and slide door and is suitable for installations into the most exposed locations.

The XP Slide LS25 is a more lightweight solution, only available as a twin track system, it boasts a sightline of 25mm, making it the slimmest lift and slide door available on the market.



SELECT AN OPTION

XP GLIDE

OVERVIEW

PRODUCT SPECIFICATION

TECHNICAL

- TWIN TRACK HEAD & FOOT
- TRIPLE TRACK HEAD & FOOT
- TWIN TRACK SIDE JAMB
- TWIN TRACK WITH CILL
- SIGHTLINE & INTERLOCK OPTIONS
- 20MM & 35MM SIGHTLINE COMPARISONS

XP SLIDE 25

OVERVIEW

PRODUCT SPECIFICATION

TECHNICAL

- TWIN TRACK HEAD AND FOOT
- TRIPLE TRACK HEAD AND FOOT
- TWIN TRACK SIDE JAMB
- TRIPLE TRACK SIDE JAMB
- TWIN TRACK WITH CILL
- STD SIGHTLINE & REINFORCED SIGHTLINE

XP SLIDE LS25

OVERVIEW

PRODUCT SPECIFICATION

TECHNICAL

- TWIN TRACK HEAD AND FOOT
- TWIN TRACK SIDE JAMB
- TWIN TRACK WITH CILL
- STD SIGHTLINE & REINFORCED SIGHTLINE

XP INFINITE

OVERVIEW

PRODUCT SPECIFICATION

TECHNICAL

- TWIN TRACK HEAD & FOOT
- TRIPLE TRACK HEAD & FOOT
- QUADRUPLE TRACK FOOT
- LOW THRESHOLD TWIN TRACK – NON-EXPOSED LOCATIONS ONLY
- LOW THRESHOLD TRIPLE TRACK – NON-EXPOSED LOCATIONS ONLY
- STD SIGHTLINE & SLIM-LINE SIGHTLINE (TWIN TRACK ONLY)
- TWIN TRACK SIDE JAMB – STANDARD & LOW THRESHOLD



XP GLIDE

Flexible configurations, larger glass areas, rapid delivery and installation times – say hello to the most popular sliding door within our portfolio the XP Glide sliding door from Express.

These state-of-the-art sliding doors offer several benefits compared with our bi-folding doors, including multiple door options. The beauty of our super-sized sliding doors is the massive glass areas that our slimline doors allow. Minimal aluminium profiles between panes mean unrestricted views and more natural light. The system is robust with no strict size limitations and is suitable for new builds, extensions and replacing existing door and window products so are ideally suited to the UK residential market.

There are numerous opening configurations available, with our sliding doors available on twin track and triple track systems and the option of a feature stainless steel pull-handle or a more discreet lever handle.



PRODUCT SPECIFICATION

XP GLIDE



- Suitable for commercial and residential applications
- Maximum weight limit per panel of 150kg
- Maximum height 2550mm
- SKG & PAS24 security tested
- Twin, triple track and wider configurations available
- Option of two slim-line interlocks available with typical sightlines of just 20mm or 35mm
- Overall U value of 1.6W/m²k & WER B rating. Part L compliant in all scenarios.
- Air Class 3, 600PA – equivalent to 70mph winds
- Wind Class AE, 2400PA – equivalent to 142mph winds
- Water Class 7a, 300PA – equivalent to 50mph winds and water being pulsed at the frames under pressure
- Structurally bonded on site for enhanced stability & weather performance.
- Suitable for the replacement of existing doors and windows
- Stainless steel feature handle available
- Full complement of doors, windows and roofs to suit
- Integral blinds are not available.



TECHNICAL

XP GLIDE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

TWIN TRACK SIDE JAMB


TWIN TRACK WITH CILL

STD 20MM INTERLOCK
& 35MM INTERLOCK

STD SIGHTLINE

35MM SIGHTLINE

TWIN TRACK HEAD AND FOOT

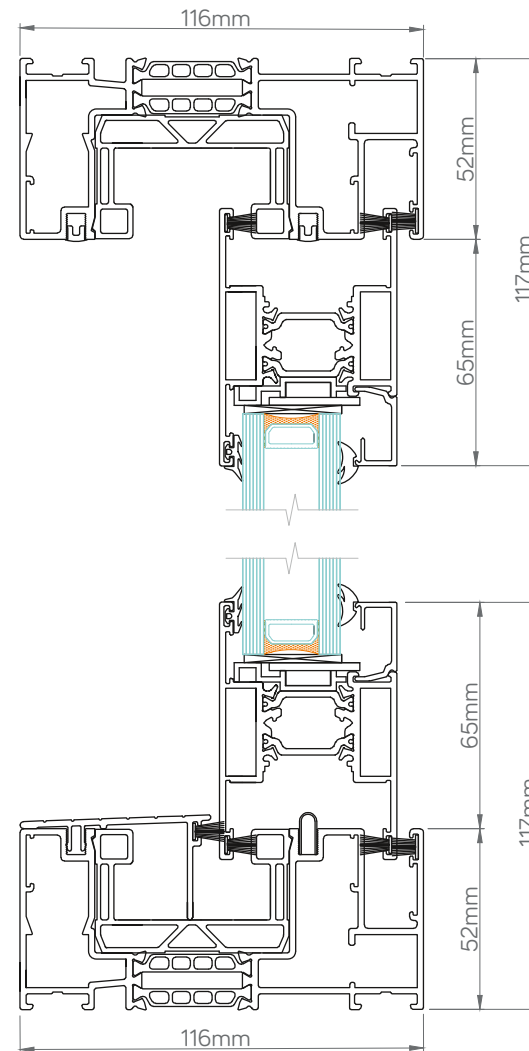

TECHNICAL

XP GLIDE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

TWIN TRACK SIDE JAMB


TWIN TRACK WITH CILL

STD 20MM INTERLOCK
& 35MM INTERLOCK

STD SIGHTLINE

35MM SIGHTLINE

TRIPLE TRACK HEAD AND FOOT

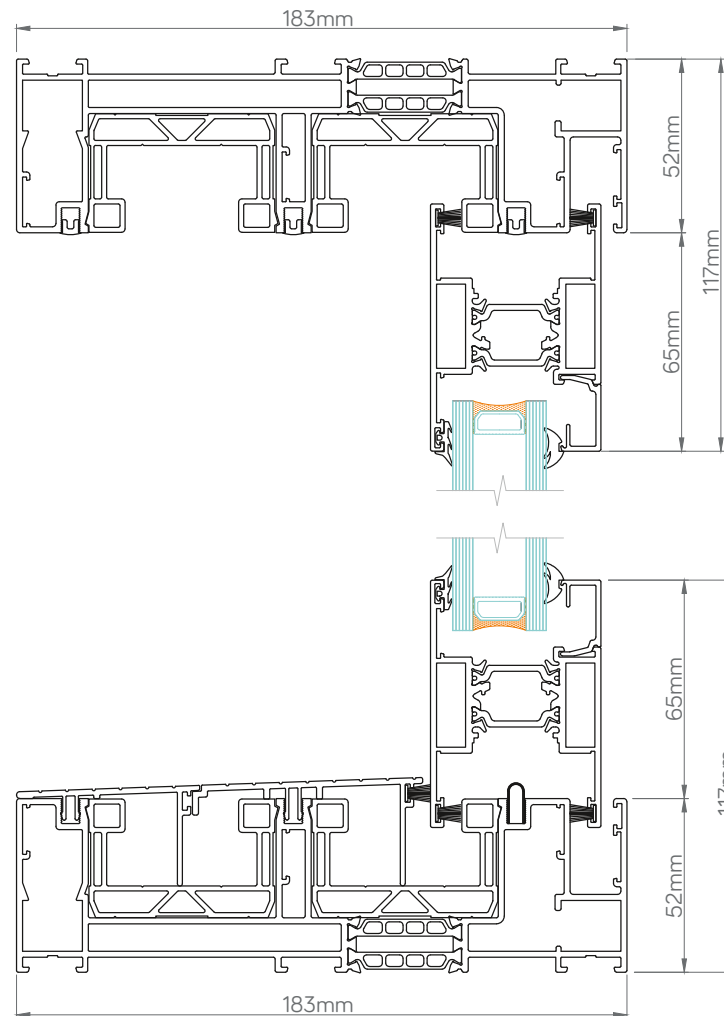


TECHNICAL

XP GLIDE

- TWIN TRACK HEAD & FOOT
- TRIPLE TRACK HEAD & FOOT
- TWIN TRACK SIDE JAMB
- TWIN TRACK WITH CILL
- STD 20MM INTERLOCK
& 35MM INTERLOCK
- STD SIGHTLINE
- 35MM SIGHTLINE

TWIN TRACK SIDE JAMB

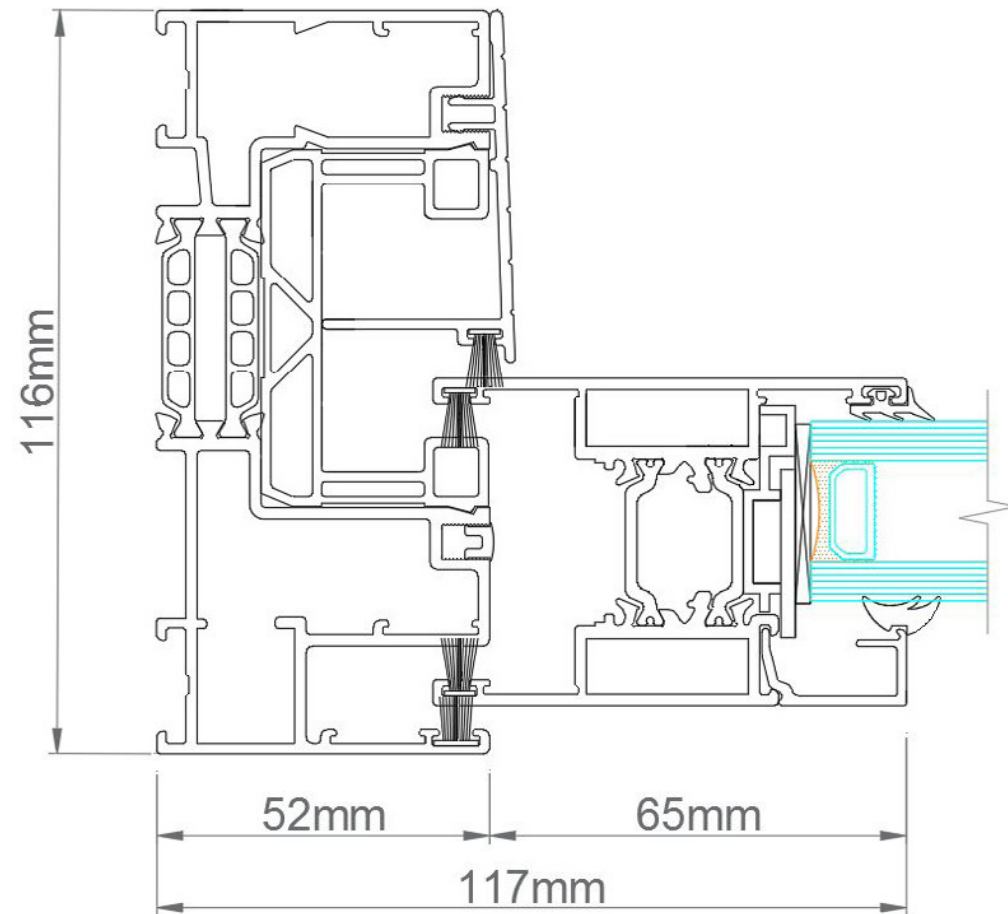

TECHNICAL

XP GLIDE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

TWIN TRACK SIDE JAMB


TWIN TRACK WITH CILL

STD 20MM INTERLOCK
& 35MM INTERLOCK

STD SIGHTLINE

35MM SIGHTLINE

TWIN TRACK WITH CILL

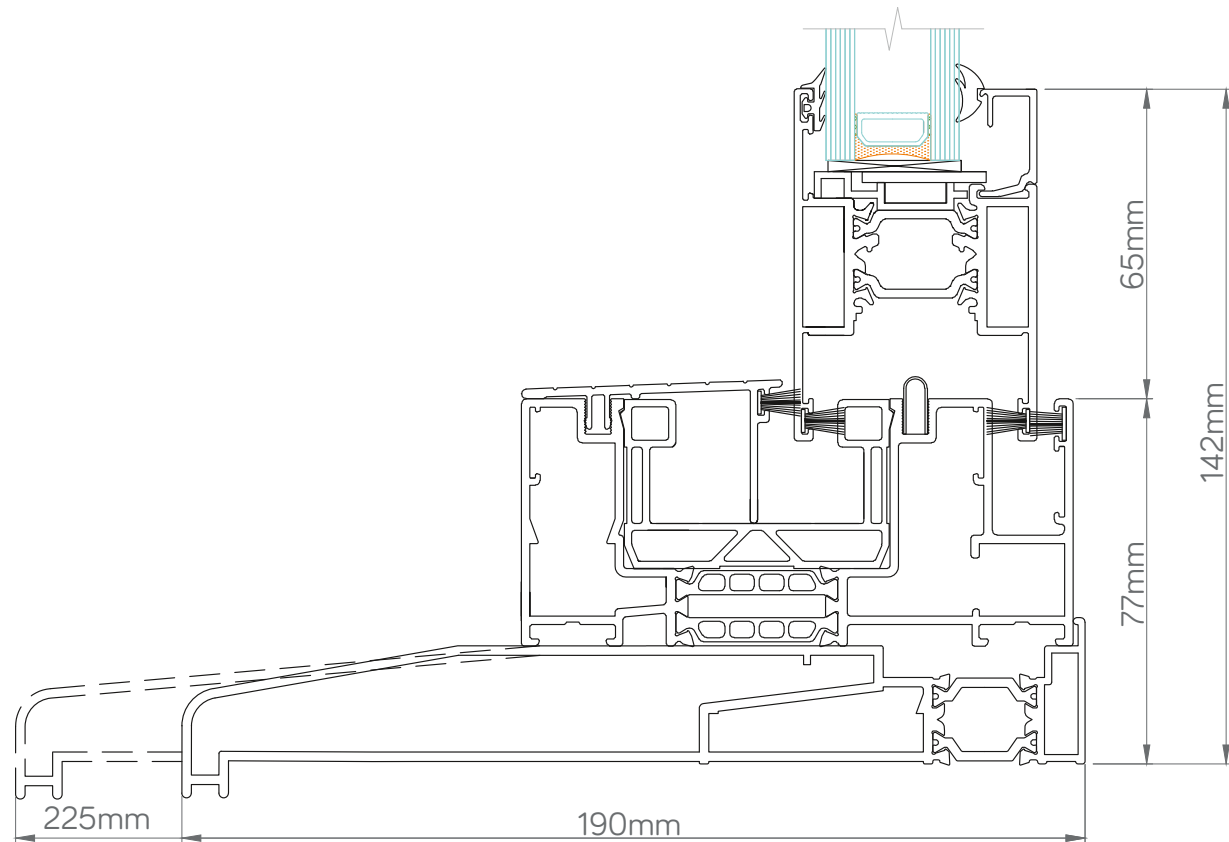


TECHNICAL XP GLIDE

- TWIN TRACK HEAD & FOOT
- TRIPLE TRACK HEAD & FOOT
- TWIN TRACK SIDE JAMB
- TWIN TRACK WITH CILL
- STD 20MM INTERLOCK
& 35MM INTERLOCK
- STD SIGHTLINE
- 35MM SIGHTLINE

STD 20MM INTERLOCK OFFERED AS STANDARD

Internal - Inside of Property


External - Outside of Property

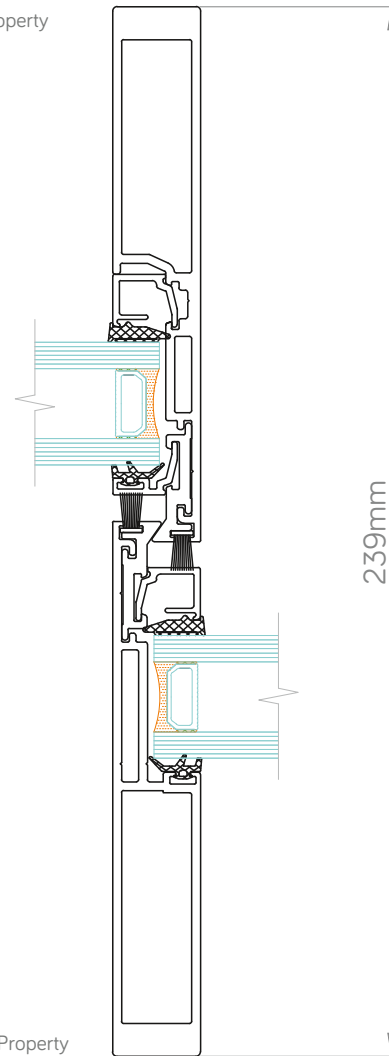

35MM INTERLOCK AVAILABLE ON REQUEST

Internal - Inside of Property

External - Outside of Property

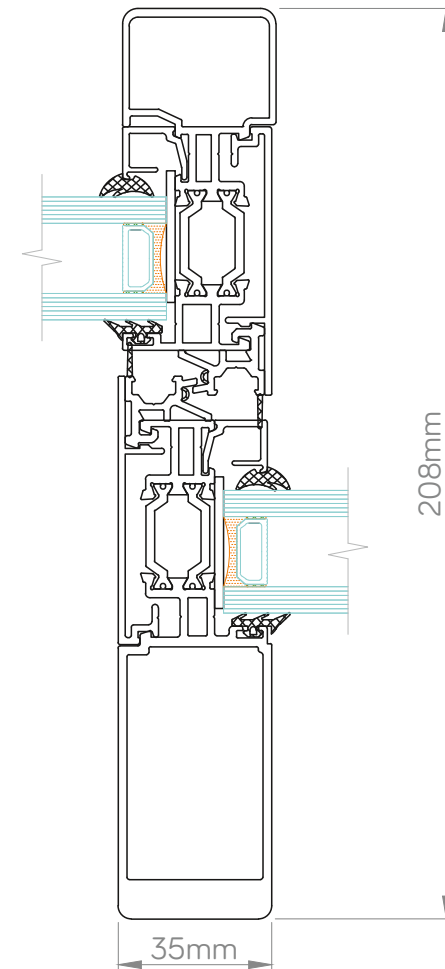


TECHNICAL

XP GLIDE

- TWIN TRACK HEAD & FOOT
- TRIPLE TRACK HEAD & FOOT
- TWIN TRACK SIDE JAMB
- TWIN TRACK WITH CILL
- STD 20MM INTERLOCK
& 35MM INTERLOCK
- STD SIGHTLINE
- 35MM SIGHTLINE

STD SIGHTLINE 20MM INTERLOCK

COMPARE TO 35MM INTERLOCK

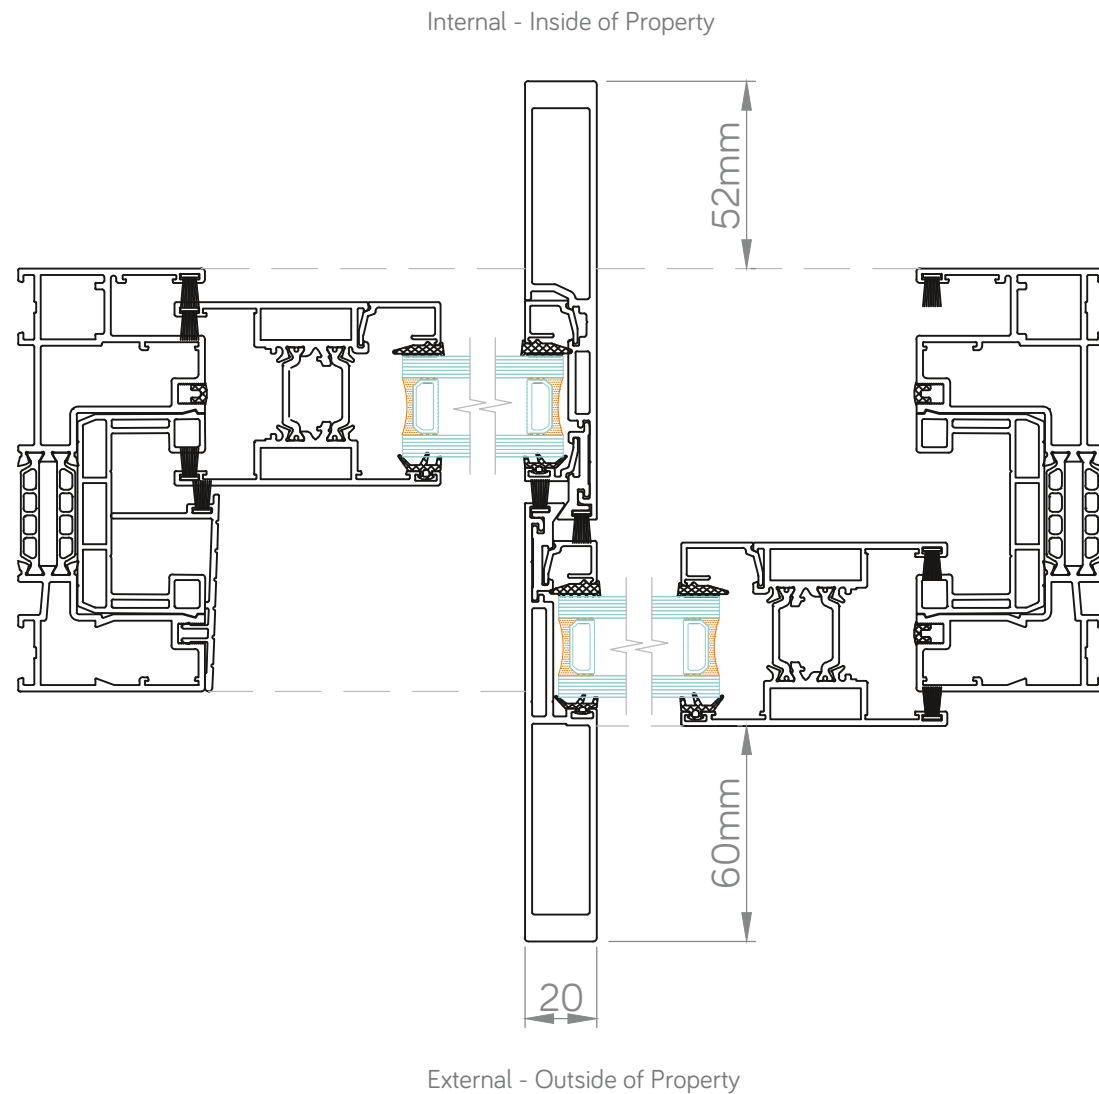


TECHNICAL

XP GLIDE

TWIN TRACK HEAD & FOOT
TRIPLE TRACK HEAD & FOOT
TWIN TRACK SIDE JAMB
TWIN TRACK WITH CILL
STD 20MM INTERLOCK
& 35MM INTERLOCK
STD SIGHTLINE
35MM SIGHTLINE

ALTERNATIVE SIGHTLINE' 35MM INTERLOCK

COMPARE TO 20MM INTERLOCK

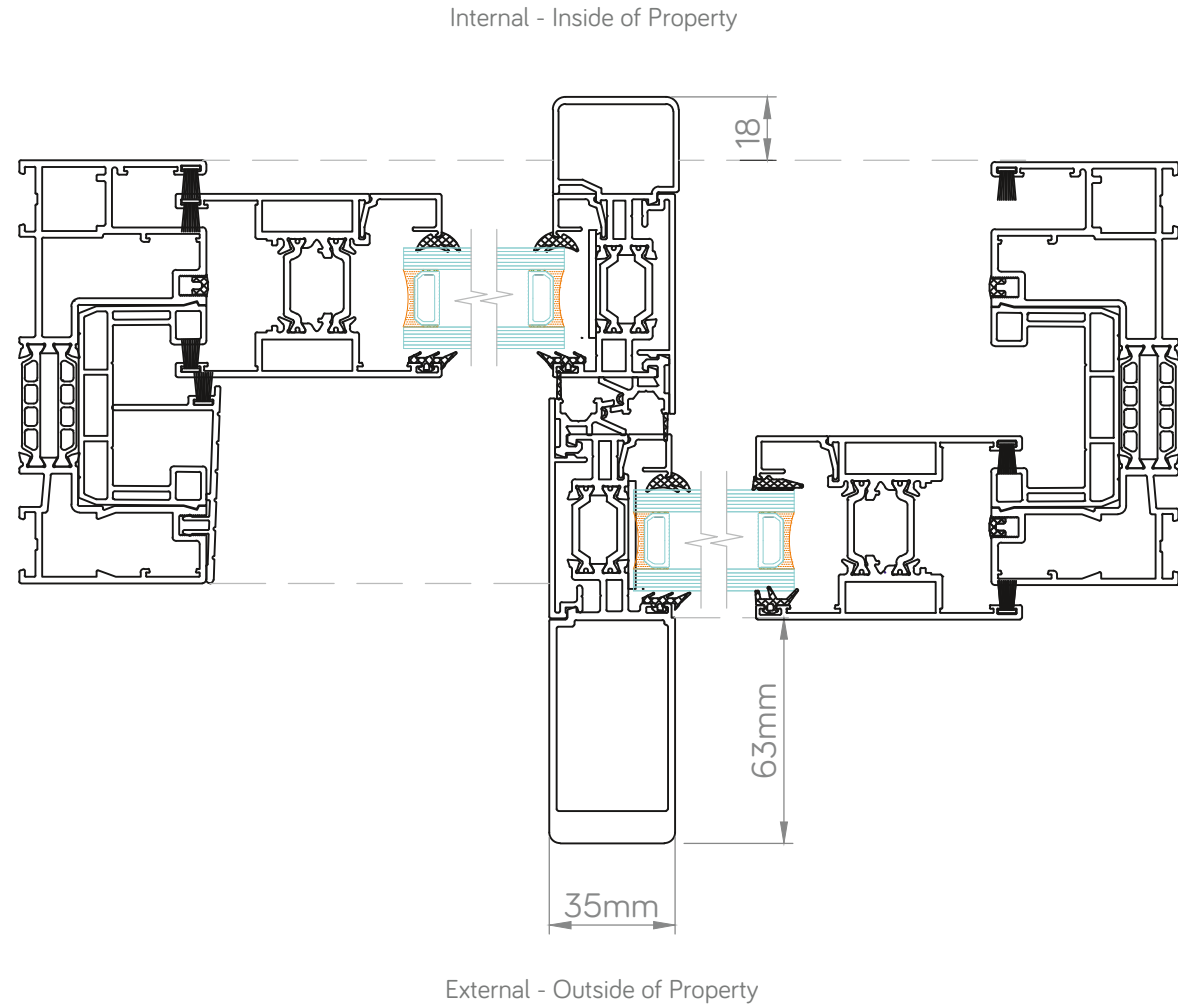


XP SLIDE 25

The XP Slide 25 patio door offers a more cost-effective solution than our XP Glide system but still offers a stunning visual aesthetic suitable for the most discerning homeowner. Manufactured with minimal frame and maximum glass allowing us to offer a beautiful glass sliding door that lets our customers enjoy panoramic views from inside their homes across the UK.

The XP Slide 25 offers a vertical sightline of just 25mm and the outer frame of the door is minimal, giving the appearance of uninterrupted glass for an effortlessly sleek finish.

The system boasts five-point locking & is available with a subtle lever handle or a bold stainless steel feature handle.

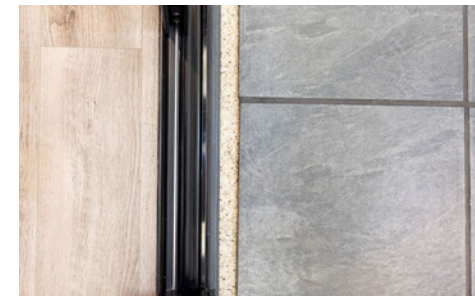

PRODUCT SPECIFICATION

XP SLIDE 25



- Structurally bonded interlock meaning less frame and more glass
- High weight limit of 150kg per panel
- Available with all panels sliding
- Typical vertical sightline of just 25mm
- Five-point locking on the master door
- Overall U values as low as 1.3W/m²k
- Available with a lift and slide mechanism
- Stainless steel feature handle available
- Full complement of doors and windows to suit
- Maximum panel width of 2500mm
- Maximum panel height of 2250mm
- Increased maximum panel height of 2400mm available with internal reinforcement profile.
- Triple glazing possible
- Textured elite & essence finishes available.



TECHNICAL

XP SLIDE 25

XP SLIDE LS25

TWIN TRACK HEAD AND FOOT

TRIPLE TRACK HEAD AND FOOT


TWIN TRACK SIDE JAMB

TRIPLE TRACK SIDE JAMB

TWIN TRACK WITH CILL

STD SIGHTLINE & REINFORCED SIGHTLINE

TWIN TRACK HEAD AND FOOT

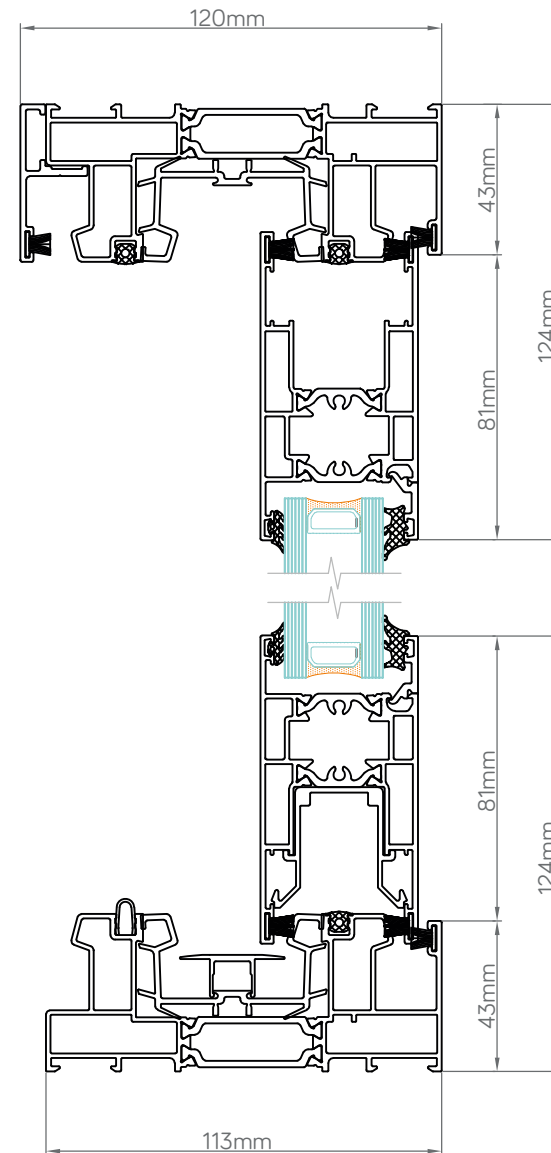

TECHNICAL

XP SLIDE 25

TWIN TRACK HEAD AND FOOT

TRIPLE TRACK HEAD AND FOOT


TWIN TRACK SIDE JAMB

TRIPLE TRACK SIDE JAMB

TWIN TRACK WITH CILL

STD SIGHTLINE & REINFORCED SIGHTLINE

TRIPLE TRACK HEAD AND FOOT

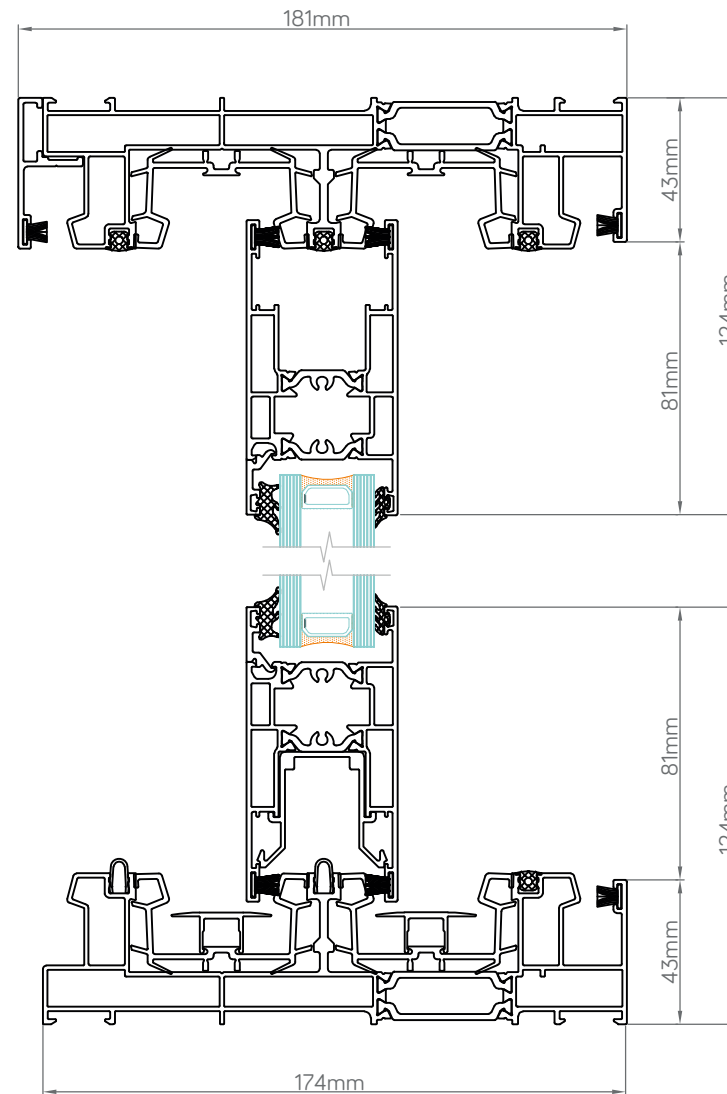

TECHNICAL

XP SLIDE 25

XP SLIDE LS25

TWIN TRACK HEAD AND FOOT

TRIPLE TRACK HEAD AND FOOT


TWIN TRACK SIDE JAMB

TRIPLE TRACK SIDE JAMB

TWIN TRACK WITH CILL

STD SIGHTLINE & REINFORCED SIGHTLINE

TWIN TRACK SIDE JAMB

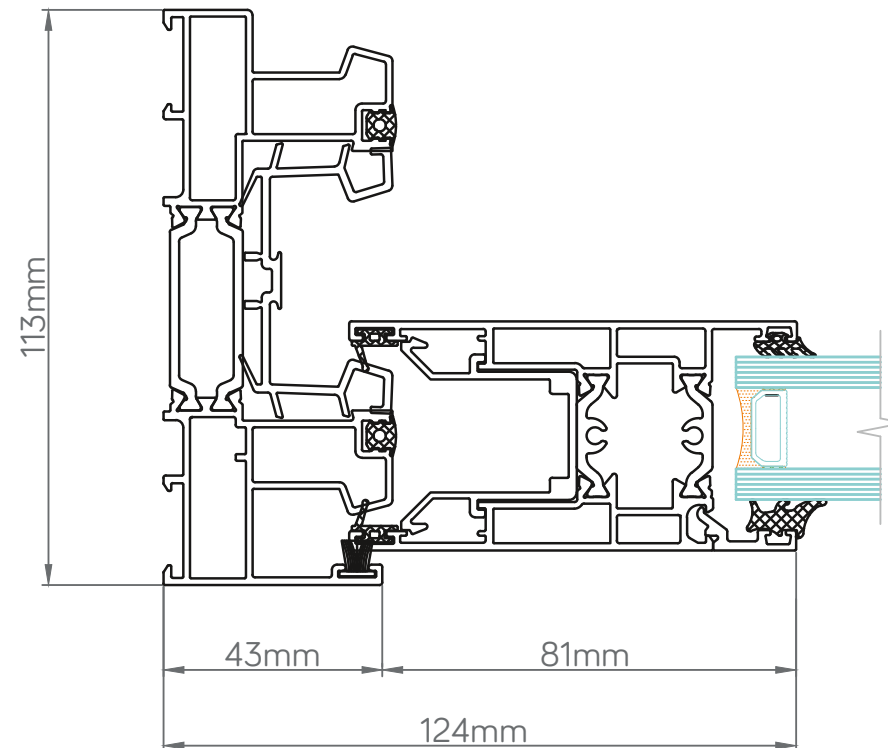

TECHNICAL

XP SLIDE 25

TWIN TRACK HEAD AND FOOT

TRIPLE TRACK HEAD AND FOOT


TWIN TRACK SIDE JAMB

TRIPLE TRACK SIDE JAMB

TWIN TRACK WITH CILL

STD SIGHTLINE & REINFORCED SIGHTLINE

TRIPLE TRACK SIDE JAMB

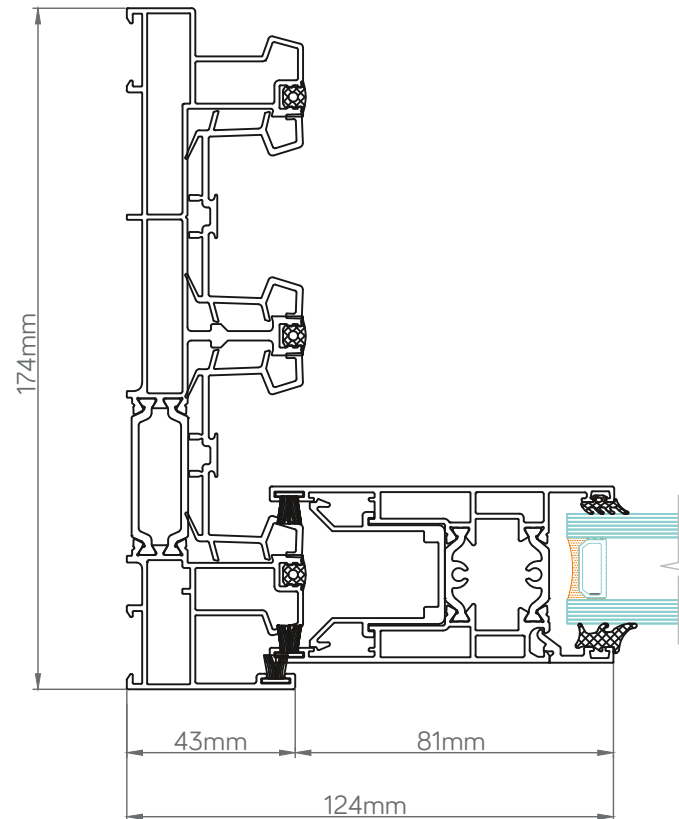

TECHNICAL

XP SLIDE 25

XP SLIDE LS25

TWIN TRACK HEAD AND FOOT

TRIPLE TRACK HEAD AND FOOT


TWIN TRACK SIDE JAMB

TRIPLE TRACK SIDE JAMB

TWIN TRACK WITH CILL

STD SIGHTLINE & REINFORCED SIGHTLINE

TWIN TRACK WITH CILL

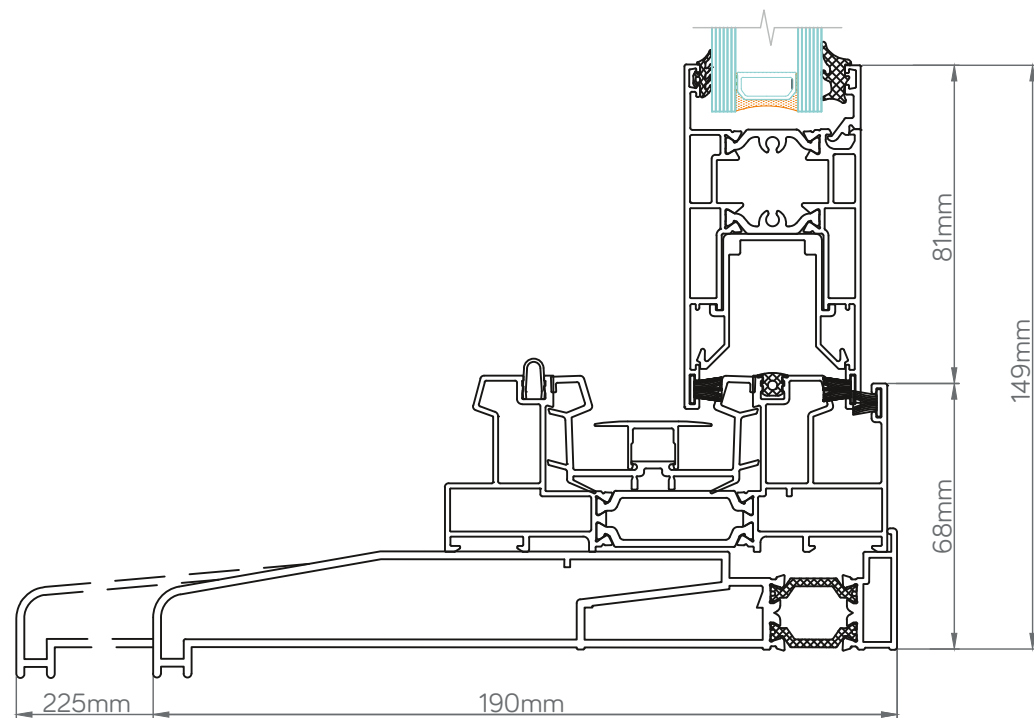

TECHNICAL

XP SLIDE 25

XP SLIDE LS25

TWIN TRACK HEAD AND FOOT

TRIPLE TRACK HEAD AND FOOT


TWIN TRACK SIDE JAMB

TRIPLE TRACK SIDE JAMB


TWIN TRACK WITH CILL

STD SIGHTLINE & REINFORCED SIGHTLINE

STD SIGHTLINE

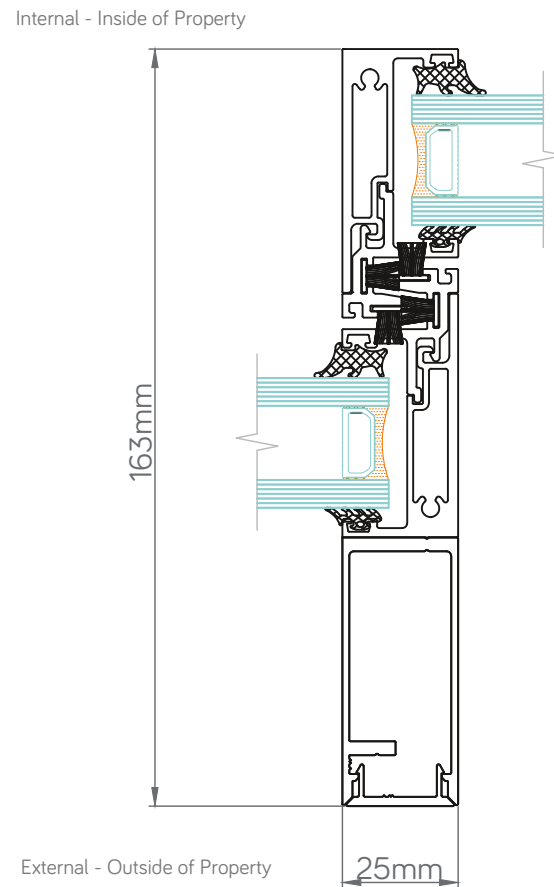

REINFORCED SIGHTLINE

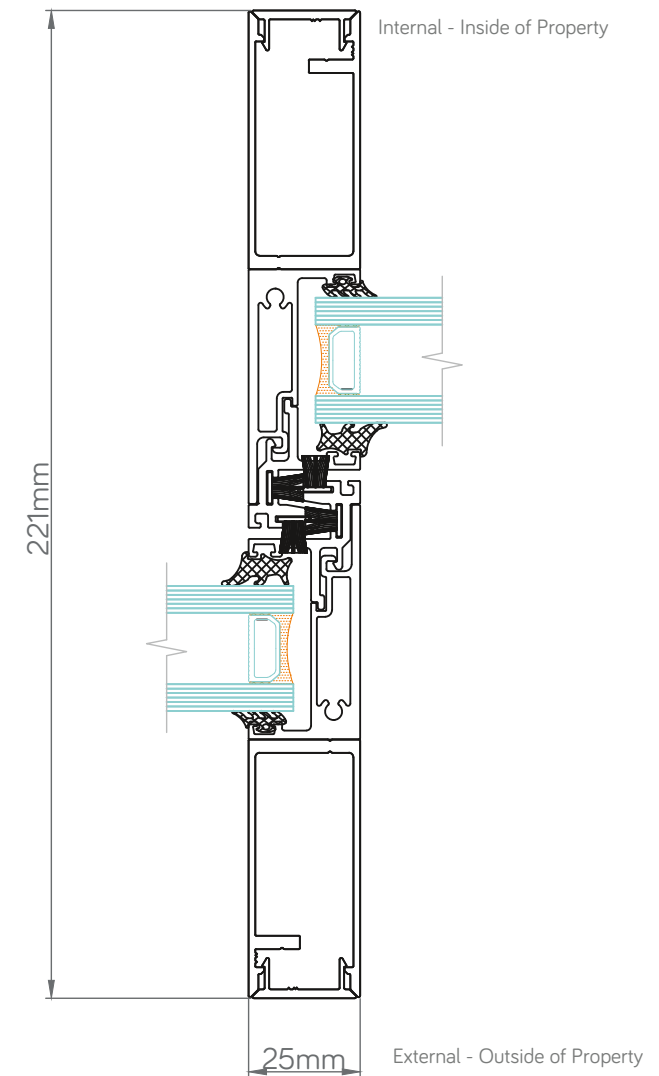

XP SLIDE LS25

The XP Slide LS25 is the lift and slide variant of our popular XP Slide 25. The system boasts the same outer frame and minimal sightline but with the lift and slide mechanism making it easier to use, lockable in any open position with improved weather ratings and the slimmest sightline of any lift and slide door on the market.

The lift and slide system is highly robust, with excellent thermal efficiency that can achieve overall U values as low as $1.3\text{W/m}^2\text{K}$. The system enables you to lock the door in any position. As the door lifts onto the ball bearings, the quality of the system minimises the weight, meaning that a double-glazed unit weighing up to 200kg can be easily slid to one side.

The system has good weather and thermal performance with the slender 25mm sight line section undoubtedly its key feature. The system is available as a twin track system only.



PRODUCT SPECIFICATION

XP SLIDE LS25



- An internal upstand which can be set against the finished floor level for a flush internal finish
- Fully weather tested slimline interlock with 25mm sightline available on twin track systems
- The slimmest lift and slide door available on the market.
- Lockable in any open position
- The elevating sliding gearing makes operation easy
- Available with both panels sliding
- Lift and slide feature handle available in several colours
- Tested to stringent PAS 024:2016 testing standards
- Overall U values as low as 1.3W/m2k
- Wind load resistance in accordance with DIN EN 12210 – up to class C3
- Watertightness in accordance with DIN EN 12208 – up to class 9A
- Air permeability in accordance with DIN EN 12207 – up to class 4
- Maximum height of 2250mm.
- Increased maximum panel height of 2400mm available with internal reinforcement profile.
- Triple glazing possible
- Textured elite & essence finishes available.



XP INFINITE

The XP Infinite is our highest specification lift & slide door system. Capable of housing extremely large glass units, whilst still operating with minimum effort

It is an excellent solution for projects with demanding requirements, meeting the trend of “transparent” architecture through extensive glass surfaces, with high thermal insulation, safety and modern design. Its minimal design and its various innovative characteristics include the option of a moving corner post and a unique quadruple outer frame and bottom track that allow the doors to create a 75% clear opening.

The XP Infinite is the ideal product for projects requiring wide spans for enhanced daylight, outstanding performance and maximum ease of use.





PRODUCT SPECIFICATION

XP INFINITE



- Exceptional sound insulation
- Water tightness Class 9A
- Air permeability Class 4
- Wind load resistance Class C4/B4
- Burglar resistance RC2 & PAS 24
- Overall U values as low as 1.1 W/m²k
- High energy savings thanks to the exceptional energy efficiency
- Thermally broken profiles filled with Energy bar & Insulation foam.
- Minimal sightline of just 47mm available on twin track doors.
- Typical sightline of just 105mm on three, four and six-panel sliding doors.
- Lift & slide mechanism makes the door easy to operate and can be locked in any open position.
- Innovative 24mm low threshold option with built-in drainage for non-exposed locations
- Typical sightline of just 94mm and more slender profiles available with the low threshold option
- Sash weight up to 400kg
- Twin, triple and unique quadruple bottom tracks available.
- Moving corner post available.
- All panels moving available with the low threshold bottom track (non-exposed locations only).
- Integral blinds available on a twin track only.

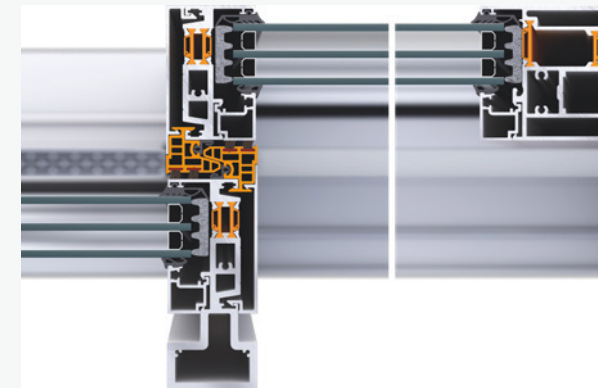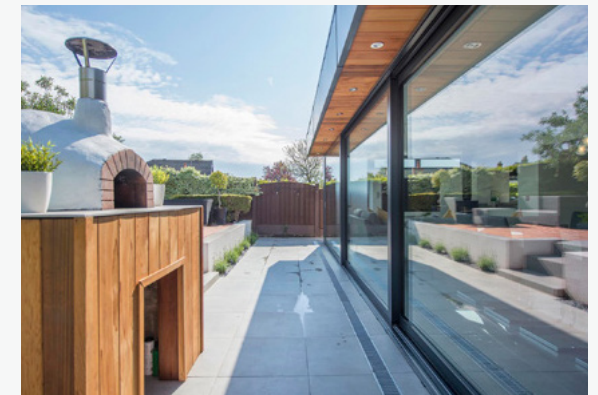

TECHNICAL

XP INFINITE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

QUADRUPLE TRACK FOOT

LOW THRESHOLD TWIN TRACK

NON-EXPOSED LOCATIONS ONLY

LOW THRESHOLD TRIPLE TRACK

NON-EXPOSED LOCATIONS ONLY


STD SIGHTLINE & SLIM-LINE SIGHTLINE

TWIN TRACK ONLY

TWIN TRACK SIDE JAMB

STANDARD & LOW THRESHOLD

TWIN TRACK HEAD AND FOOT

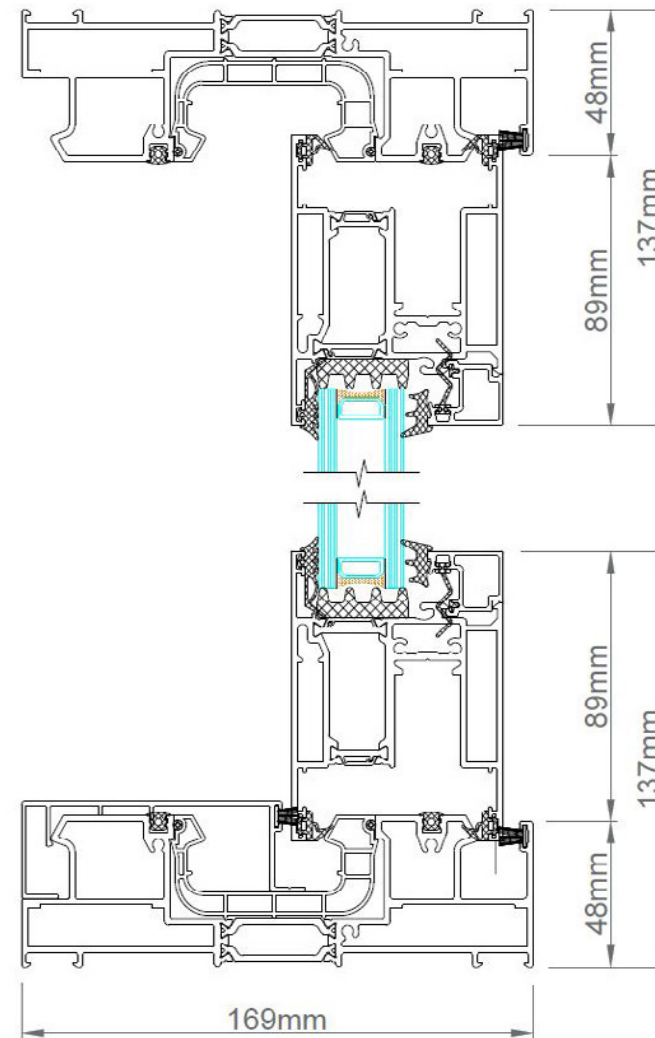

TECHNICAL

XP INFINITE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

QUADRUPLE TRACK FOOT


LOW THRESHOLD TWIN TRACK
NON-EXPOSED LOCATIONS ONLY

LOW THRESHOLD TRIPLE TRACK
NON-EXPOSED LOCATIONS ONLY

STD SIGHTLINE & SLIM-LINE SIGHTLINE
TWIN TRACK ONLY

TWIN TRACK SIDE JAMB
STANDARD & LOW THRESHOLD

TRIPLE TRACK HEAD AND FOOT

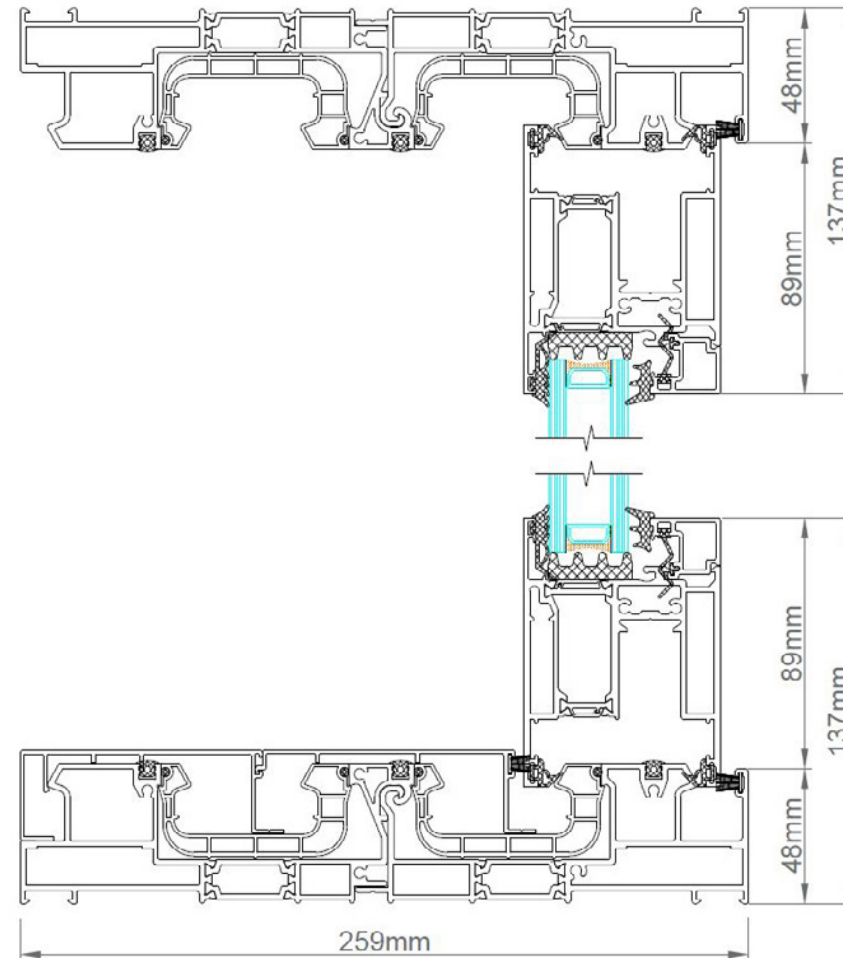

TECHNICAL

XP INFINITE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

QUADRUPLE TRACK FOOT


LOW THRESHOLD TWIN TRACK
NON-EXPOSED LOCATIONS ONLY

LOW THRESHOLD TRIPLE TRACK
NON-EXPOSED LOCATIONS ONLY

STD SIGHTLINE & SLIM-LINE SIGHTLINE
TWIN TRACK ONLY

TWIN TRACK SIDE JAMB
STANDARD & LOW THRESHOLD

QUADRUPLE TRACK FOOT

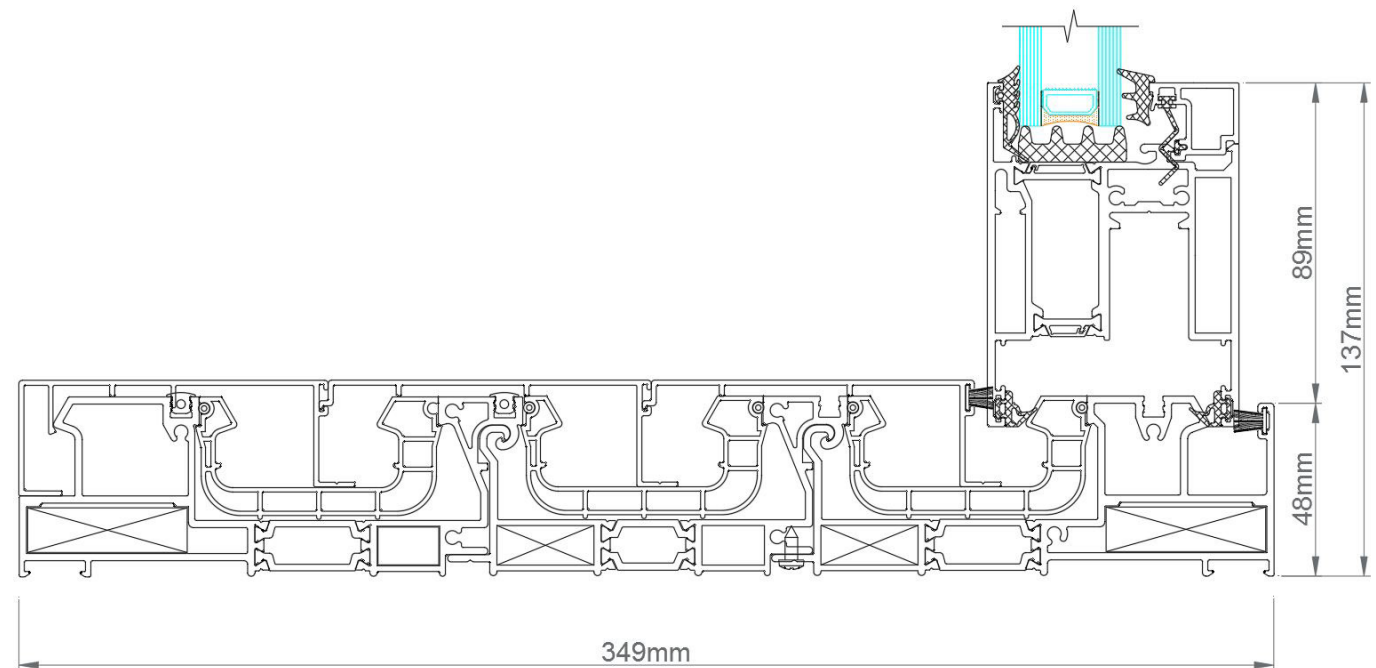

TECHNICAL

XP INFINITE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

QUADRUPLE TRACK FOOT


LOW THRESHOLD TWIN TRACK
NON-EXPOSED LOCATIONS ONLY

LOW THRESHOLD TRIPLE TRACK
NON-EXPOSED LOCATIONS ONLY

STD SIGHTLINE & SLIM-LINE SIGHTLINE
TWIN TRACK ONLY

TWIN TRACK SIDE JAMB
STANDARD & LOW THRESHOLD

LOW THRESHOLD TWIN TRACK NON-EXPOSED LOCATIONS ONLY

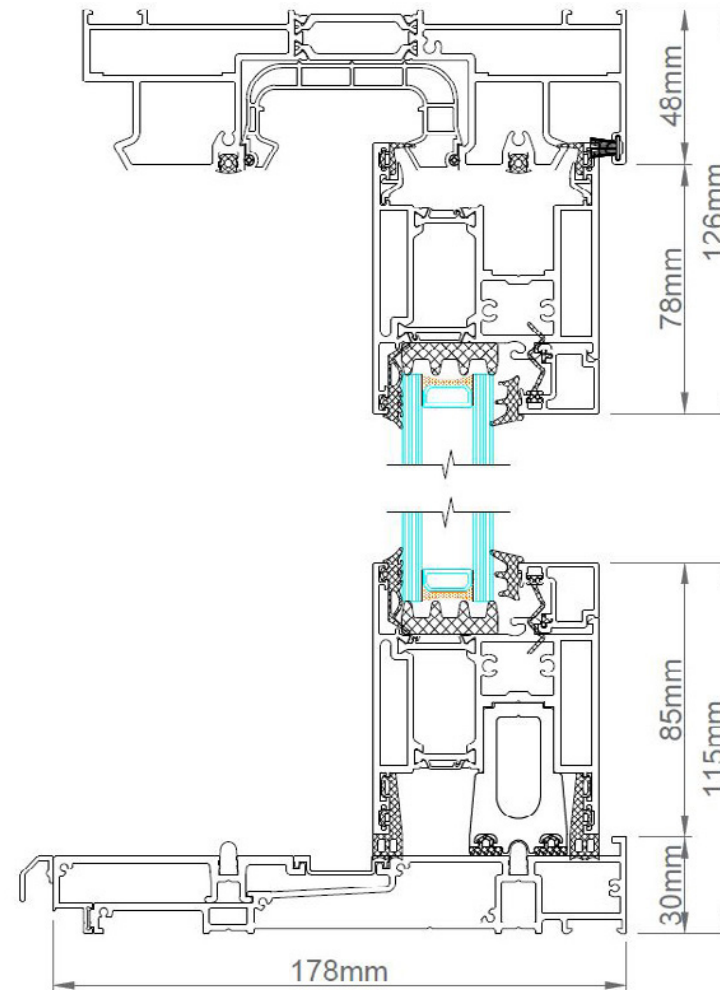

TECHNICAL

XP INFINITE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

QUADRUPLE TRACK FOOT

LOW THRESHOLD TWIN TRACK

NON-EXPOSED LOCATIONS ONLY

LOW THRESHOLD TRIPLE TRACK

NON-EXPOSED LOCATIONS ONLY

STD SIGHTLINE & SLIM-LINE SIGHTLINE


TWIN TRACK ONLY

TWIN TRACK SIDE JAMB

STANDARD & LOW THRESHOLD

LOW THRESHOLD TRIPLE TRACK

NON-EXPOSED LOCATIONS ONLY

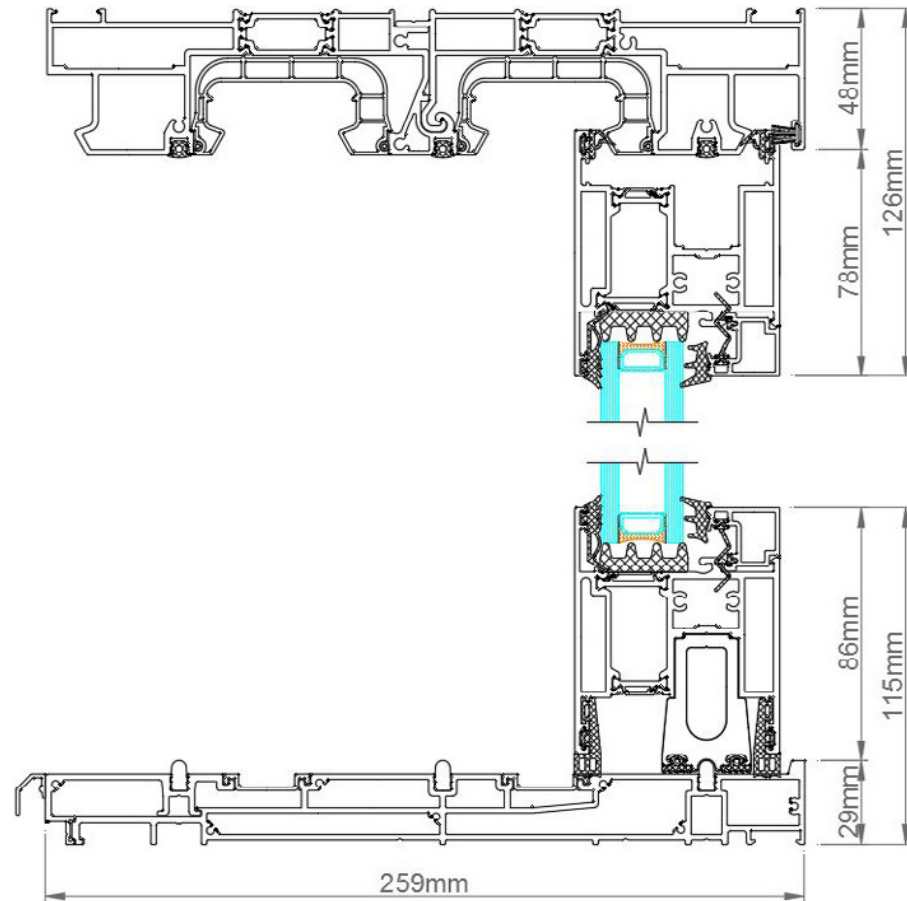

TECHNICAL XP INFINITE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

QUADRUPLE TRACK FOOT

LOW THRESHOLD TWIN TRACK

NON-EXPOSED LOCATIONS ONLY

LOW THRESHOLD TRIPLE TRACK


NON-EXPOSED LOCATIONS ONLY

STD SIGHTLINE & SLIM-LINE SIGHTLINE
TWIN TRACK ONLY

TWIN TRACK SIDE JAMB


STANDARD & LOW THRESHOLD

STD SIGHTLINE

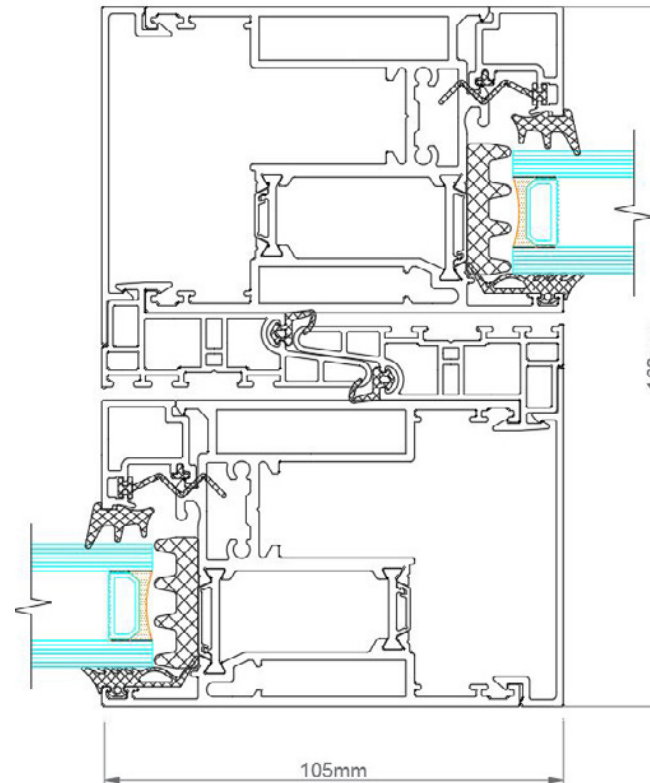

*Used on triple & quadruple doors with the standard threshold.
Reduced sightline of 94mm with the low threshold.

SLIM-LINE SIGHTLINE TWIN TRACK ONLY

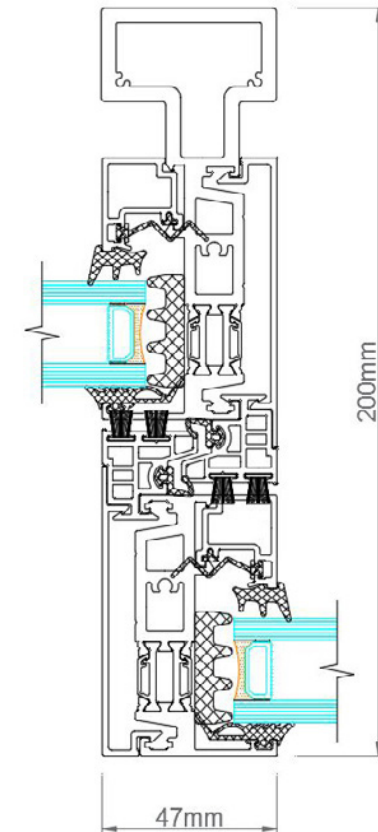

*Available on both the standard and low threshold options.

TECHNICAL XP INFINITE

TWIN TRACK HEAD & FOOT

TRIPLE TRACK HEAD & FOOT

QUADRUPLE TRACK FOOT

LOW THRESHOLD TWIN TRACK

NON-EXPOSED LOCATIONS ONLY

LOW THRESHOLD TRIPLE TRACK

NON-EXPOSED LOCATIONS ONLY


STD SIGHTLINE & SLIM-LINE SIGHTLINE

TWIN TRACK ONLY

TWIN TRACK SIDE JAMB

STANDARD & LOW THRESHOLD

STANDARD TWIN TRACK SIDE JAMB

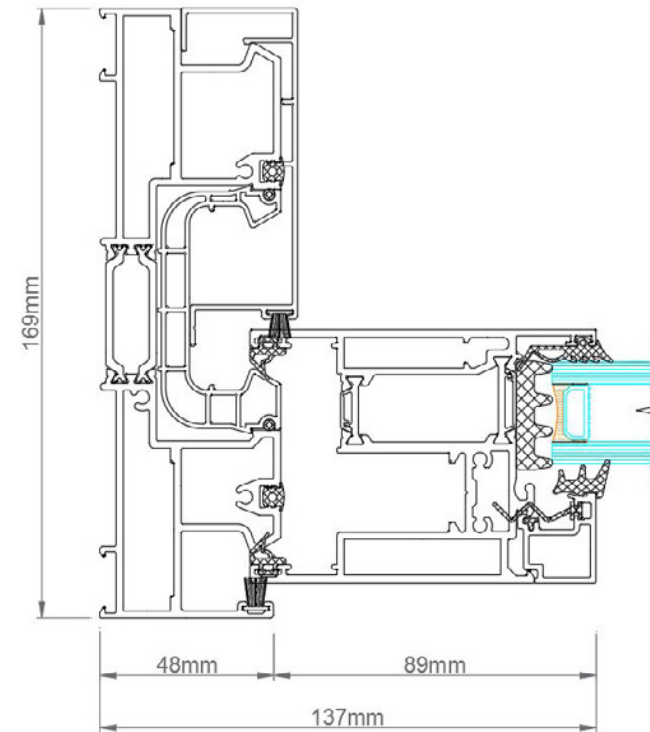

LOW THRESHOLD TWIN TRACK SIDE JAMB

LOW THRESHOLD

