


Preliminary Roost Assessment

2 Chapel Close
Brockhall Village
Blackburn
BB6 8HU

For
Mr & Mrs Turner



Gritstone Ecology

Contents

- 1. Introduction2
- 2. Methods4
- 3. Results6
- 4. Evaluation8
- 5. Impact assessment9
- 6. Required actions9
- 7. References10
- 8. Appendix 1 – Photographs11



1. Introduction

1.1. Purpose of the report

The report is written by Stewart Bradshaw for Mr & Mrs Turner. Stewart carried out a Preliminary Roost Assessment of 2 Chapel Close, Brockhall Village, on 7th May 2025. The survey was completed to inform a planning application at the property.

1.2. Survey aims

The aim of the survey was to determine the actual or potential presence of bats and the need for further survey or mitigation.

1.3. Surveyor details

Stewart is licensed to disturb, take and handle all species of bats in all counties of England under licence number 2015-15615-CLS-CLS. He has more than 15 years of experience in ecological consultancy, including the planning & preparation of bat surveys, and mitigation licences.

1.4. Reason for survey

The development proposals are for the demolition of a double garage, and the construction of a replacement building linked to the house, alterations to part of the roof of the house, construction of a new attached garage, and changes to the internal layout.

1.5. Site context

The house is located on Chapel Close, Brockhall Village, Blackburn, BB6 8HU, GR SD 70017 36755, approximately 10km north of Blackburn Town Centre. The house is in a residential area on the northern edge of Brockhall Village, and is surrounded by houses and gardens to the south, with farmland and open green-space to the north.

The site includes an occupied modern detached house, with a detached garage, gardens to the front and rear, and areas of hard landscaping.

Habitat within 50m of the house includes; houses, gardens, trees, hedgerows, small areas of open green-space, and quiet well-lit roads.


Habitat within 500m includes, housing and well-lit roads, linked back gardens, areas of open farmland, hedgerows, watercourses, ponds, mature trees, and blocks of woodland.

Farmland and areas of open green-space locally, woodlands, watercourses, and linked back gardens, potentially provide good quality foraging opportunities for bats, in an area which is subject to little disturbance from light, noise, traffic, and other human activity.

The site and immediate surrounding area provide high quality foraging, commuting, and roosting opportunities for bats; with higher quality and less disturbed habitat around farmland to the north, and along The Ribble Valley.



1.6. Site location

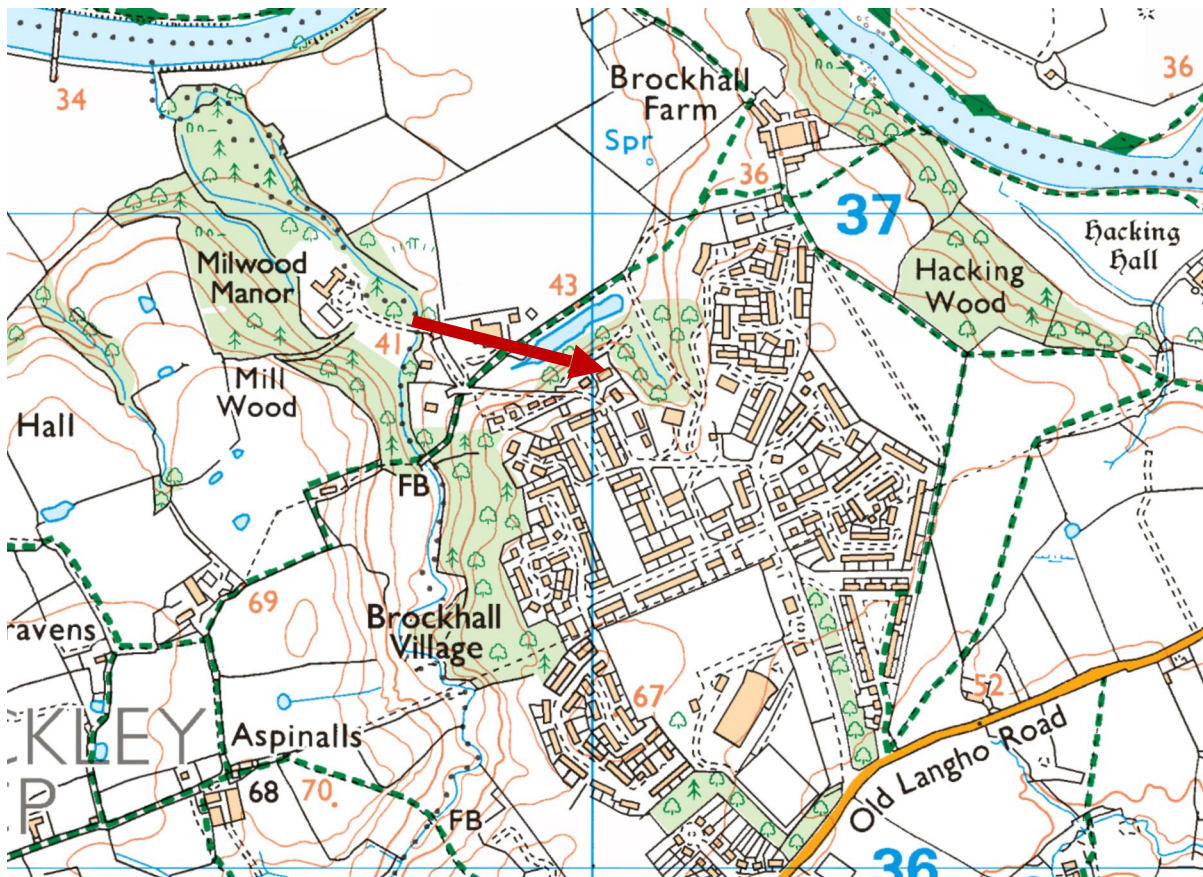

1.6a – 2 Chapel Close - site location.



1.6b – 2 Chapel Close - aerial photograph - with the house and garage indicated.



2. Methods

2.1. Survey timings

The building inspection was completed on 7th May 2025. Weather conditions during the survey were bright, warm, and dry, with a temperature of 18°C.

2.2. Desk study

No desk study of the site was undertaken, prior to the preliminary roost assessment, and no other ecological surveys have been carried out in relation to the proposals.

The development has a small footprint, and impacts beyond the site boundary are unlikely. A site-specific investigation was considered more suitable.

2.3. Habitat assessment

The habitat on site and in the surrounding area was assessed using Ordnance Survey mapping, and aerial photography. Habitat features on site, and those in the surrounding area were assessed for their suitability for use by bats during the site visit.

2.4. Building inspection

A systematic search of the exterior of the building was made to identify potential or actual bat access points and roosting places, and to locate any evidence of bats such as live or dead specimens, bat droppings, urine splashes, fur-oil staining and or squeaking noises. Bat specimens and droppings are the most reliable type of evidence; the other types are not always the result of bat activity. Sometimes bats leave no visible sign of their presence on the outside of a building (even when they do wet weather can wash evidence away.)

The search included (where present) the ground beneath potential access points, windowsills, window panes, walls, behind peeling paintwork and lifted rendering, hanging tiles, weatherboarding, eaves, soffit boxes, fascia's, lead flashing, gaps under felt, under tiles / slates and in existing bats boxes. Gaps in brickwork and stonework were searched (where present). All evidence of use by bats, or features with the potential to be used by bats was recorded and photographed.

A systematic search of the inside of the building was undertaken to identify potential or actual bat access points and roosting places, and to locate evidence of bats. Bat specimens (live or dead) and droppings are the most reliable type of evidence. Other evidence can include urine splashes, fur-oil staining, feeding remains, squeaking noises, bat fly (Nycteribiid) pupal cases (Hutson 1984) or odour.

Areas inspected include;

Within rooms

- floors and surfaces
- behind wooden panelling
- in lintels above doors and windows
- behind window shutters and curtains
- behind pictures, posters, furniture, peeling paintwork, peeling wallpaper, lifted plaster and boarded up windows
- inside cupboards and in chimneys accessible from fireplaces.



Within roof spaces

- the tops of gable end and dividing walls
- the top of chimney breasts
- ridge and hip beams and other structural timbers
- mortise and tenon joints
- all beams
- the junction of roof timbers, especially where ridge and hip beams meet
- behind purlins
- between tiles and the roof lining (where accessible)
- under flat felt roofs.

The areas listed above were inspected (where present), any additional areas with potential for use were also inspected.

2.5. Equipment

The equipment listed below was available for use during the surveys and was used where required.

Clulite CB2 1,000,000 candlepower torch. Rigid Seesnake CA-300 digital endoscope with 0.9m cable reach with 17mm and 6mm imaging heads. Digital camera with 50x zoom. 8x25 close focussing binoculars, 4m ladders, bat handling gloves, DNA sampling tubes.

Additionally a camera drone was used to inspect the roof in detail.

2.6. Survey limitations

None. All accessible areas of the house and garage were inspected in detail. The building inspection was completed in May, when bats are active, and external signs of use, such as droppings, are more likely to be evident, if present.



3. Results

3.1. The house



3.1a – The front of the house.

Nº2 Chapel Close, Brockhall Village, is a modern detached house, which is currently occupied. It has a pitched, hipped, roof, covered with concrete roof tiles, and mechanically fixed ridge tiles. Roof pitches face north, south, east, and west; gables face east, west, and south. There are dormer windows on the south facing pitch of the eastern section of the roof, and Velux windows in other areas.

Lead flashing is fitted at the base of chimneys, in roof valleys, around dormers and where roof tiles abut brickwork. UPVC fascia boards and boxed soffits are fitted at the eaves. Timber cladding is fitted above eaves height on the south facing gable end.

The building has a timber frame, with a brick outer shell. External walls are covered with a modern white render. Discreet lintels are fitted, sills are brick; window and door frames are UPVC, all glass is intact. Internally ceilings are fully vaulted, and there are no accessible roof voids, or crawl spaces.

The building is modern, was built to a high standard, is well maintained, and in good condition. Ridge tiles are mechanically fixed, there are no damaged or missing ridge tiles. There are no damaged, slipped, or missing roof tiles. Roof tiles are tightly fitted, with no gaps between tiles. Fascia boards and boxed soffits are fitted tightly against the walls gaps are filled with sealant. Walls and render are in good condition, with no missing mortar or cracks.

The house has no features externally internally which are suitable or likely be used by roosting bats, and no indications of use by bats were present during the inspection.



3.2. The garage



3.2a – The roof void.

The garage has a pitched roof covered with concrete roof tiles and mechanically fixed ridge tiles. Roof pitches face north and south, gables face east and west. UPVC fascia boards and boxed soffits are fitted at the eaves. Walls are brick with an insulating cavity, covered with a modern white render.

The garage has a single roof void, which is used for storage, and accessed regularly. The roof has a timber rafter and purlin structure, lined with a modern breathable membrane. Roof lining is in good condition with no tears, or gaps.

The wall cavity was inspected at the wall plate using an endoscope. There are no gaps at the wall-plate; and there are no gaps which give direct access to the roof void from the outside. Boxed soffits open into the roof void and were inspected from above.

There are no other enclosed spaces which are suitable to be used by roosting bats.

3.3. Indications of use

No indications of use by bats were present in the house or garage during the building inspection, either internally, or externally.

3.4. Level of suitability

The house and garage have **negligible suitability** for use by roosting bats. This is as the buildings are modern, well maintained, in good condition, and as no suitable roosting opportunities were noted during the building inspection.



4. Evaluation

The site is set in an area which, in general, provides high quality habitat, for foraging, commuting and roosting bats, and bats are likely to be present locally.

Woodlands, areas of open green-space, and linked back gardens locally provide good foraging opportunities for bats, in an area which is subject to little disturbance from light, noise and other human activity.

Buildings immediately adjacent to good quality habitat are more likely to be used by roosting bats than those further away. However, the house and garage are well-sealed, and have no features which could be used by roosting bats.

The buildings were constructed to a high standard, are modern, well maintained, and in good condition. There are no features externally, which are suitable, or likely to be used by roosting bats. The house has no roof voids. The roof void of the garage has no gaps which could give direct access to roosting bats, and no evidence of use was found during the inspection.

The lack of any indications of use inside the roof void of the garage, such as bat droppings or feeding remains, reduces the likelihood of a significant roost being present. If bats were present inside the roof void, even in lower numbers, some evidence of use would be likely to persist.

Roof and ridge tiles are in good condition; ridge tiles are mechanically fixed. There are no gaps between roofing materials which could be used by roosting bats.

External are brick, and are covered with a modern white render. Walls and render are in good condition, with no cracks, or missing mortar which could be used by crevice dwelling bats.

Window and door frames are fixed into the brickwork, gaps are filled with sealant, and offer no suitable roosting opportunities.

Fascia boards and boxed soffits at the eaves are fixed tightly against brickwork, with no suitable gaps; wall cavities and boxed soffits (in the garage) open into the roof void, and were inspected from above.

The small gaps between brickwork, roof timbers, and roofing materials, in the roof void were inspected in detail using an endoscope. No droppings were found, and no suitable gaps were present which could give access, or shelter to roosting bats.

Taking into account the habitat surrounding the site, and the features present, the buildings are unlikely to be used by roosting bats and have **negligible suitability** for use.

4.1. Legal and planning context

All species of bats in the UK and their roosts are legally protected by UK and European legislation. The UK the legal protection is summarised as follows:

You will be committing a criminal offence if you:

1. Deliberately* capture, injure or kill a bat
2. Intentionally or recklessly disturb a bat in its roost or deliberately disturb a group of bats
3. Damage or destroy a bat roosting place (even if bats are not occupying the roost at the time)



4. Possess or advertise/sell/exchange a bat (dead or alive) or any part of a bat
5. Intentionally or recklessly obstruct access to a bat roost even if bats are not present at the time

*In a court, 'deliberately' will probably be interpreted as someone who, although not intending to capture/injure or kill a bat, performed the relevant action, being sufficiently informed and aware of the consequence his/her action would most likely have.

If bats were roosting in the building, the proposed works would likely impact bats or bat roosts.

5. Impact assessment

The development proposals are for the demolition of a double garage, and the construction of a replacement building linked to the house, alterations to the roof of the house, construction of a new attached garage, and changes to the internal layout.

The house and garage have no features which are suitable, or likely to be used by roosting bats and have negligible suitability for use.

The proposed work is unlikely to impact on bats or bat roosts; and, once completed is unlikely to provide any increase in levels of disturbance for bats locally.

6. Required actions

The house and garage have **negligible suitability** for use by roosting bats, no field signs of use by bats were found internally or externally during the inspection, and no further survey work is required.



7. References

Department for Communities and Local Government (2012). National Planning Policy Framework.

Collins, J. (ed.) (2023). Bat Surveys for Professional Ecologists: Good Practice Guidelines. (4th ed.) The Bat Conservation Trust, London.

Mitchell-Jones, A.J. (2004). Bat Mitigation Guidelines. English Nature.

Mitchell-Jones, A.J. & McLeish, A.P. (2004). The Bat Workers Manual. (3rd ed.) JNCC



8. Appendix 1 – Photographs



1 – The front of the house.



2 – The rear of the house and garage.





3 – The garage.



4 – Ridge tiles are mechanically fixed, roof tiles are in good condition.





5 – Fascia boards and boxed soffits at the eaves are fixed tightly against brickwork.



6 – Leadwork is fixed tightly with no viable gaps.





7 – Walls and render are in good condition.



8 – Window and door frames are fitted tightly with no suitable gaps.





9 – Timber cladding is fitted tightly with no warped boards or gaps between materials.



10 – The garage roof is lined with a modern breathable membrane.

