


**HARD LANDSCAPE**

-  **Proposed Paving**  
Paving to curtilage of building  
Specification subject to client preference
-  **Existing Stone Wall**  
to be retained and repaired where required  
(onsite walls only)
-  **Proposed Stone Wall**  
to be maximum 1.4m high to provide visual  
interest along Barker Brow.  
Local stone to be used.

**SOFT LANDSCAPE**

-  **Existing Vegetation**
-  **Proposed Amenity Grass**  
Specification subject to client preference
-  **Rear Garden**  
Specification subject to client preference.
-  **Proposed Formal Hedge**  
Low hedge to be planted at 60-80cm BR stock at 5  
per lin.m  
Species: Crataegus monogyna
-  **Proposed Deciduous Tree (Single Stem)**  
Minimum clear stem 2m, 14-16cm Girth Extra  
Heavy Standard  
Typical species: Betula Jacquemontii (to match  
existing tree narrative along Barker Brow)
-  **Proposed Screening Tree**  
Specification to clients preference

**Section A-A'**  
(Indicative only) scale 1:100

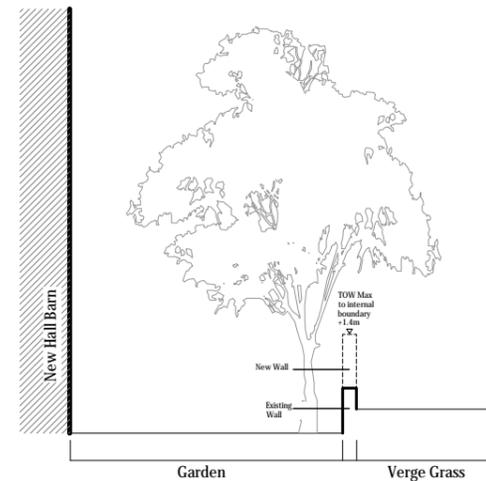

**REVISION NOTES**

Rev	By	Description	Date
-	XX	-	00.00 15

Client  
**Paul Walton Associates**

Project  
**New Hall Barn**

Description  
**Landscape Layout**

Status  
**For Approval**

Scale @ A3 <b>1:200</b>	Drawn <b>HL</b>	Checked <b>KH</b>	Date <b>Aug 15</b>
Job number <b>2337</b>	Drawing number <b>01</b>	Revision <b>-</b>	

**tpm landscape**  
chartered landscape architects  
address: 4th Floor Studio 10 Little Lever St Manchester M1 1HR  
tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk