


SITE PLAN

Scale = 1:500

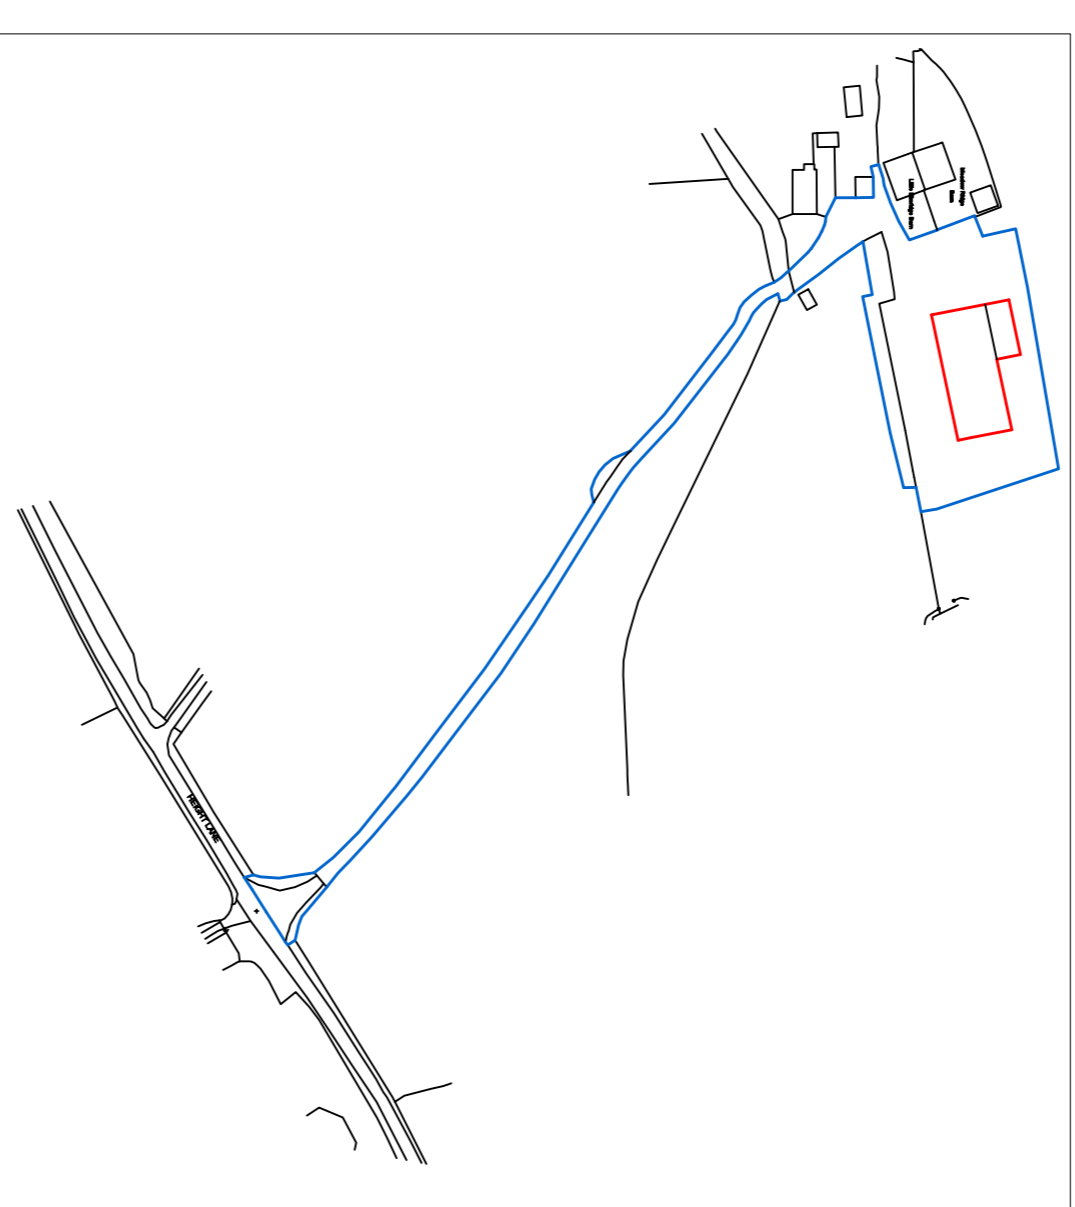

LOCATION PLAN

Scale = 1:2500

Tree Planting Schedule

Trees:

Native specimen trees 3m standards, staked and planted in the planting compost. (5-10cm x 5m + spacing).
Trees may comprise of the following:

- Betula spaldia (birch)
- Prunus avium (cherry)
- Quercus robur (Oak)
- Sorbus aucuparia (Rowan)

Hedging:

45 - 90cm transplants at 45cm centre in a double staggered row - Laneshire Hedge Row, (50% - Hawthorne, 40% - Blackthorn, 5% - Hazel, 5% - Holly.)

Fenced whips or larger should be staked and protected against vermin where necessary. Once planted, maintained in a weed free condition. Use of bark chips on a mulch and periodic weed best results achieved when planted during planting season, November to March for all bare root stock. Watering may be required during dry spells in the summer months.

Amended 23/12/15

**J HADFIELD,
ENGINEERING SURVEYING.**

Spring House, Chipping, Lanchashire PR3 2GQ.
Tel 07740 820096

Unit D, Coopersall, Dunm, Burnsidecliffe, TD11 3QH
Tel 07740 820096

Company Details:
METCALF AGRICULTURAL ENGINEERS

Project Details:
**SITE & LOCATION PLANS
LEAN-TO STORAGE EXTENSION
LITTLE ELMRIDGE
HIGHT LANE
CHIPPING
PR3 2NU**

Project Number: 379202 A	Date: SEPT/15	Scale: 1:100	By: JH
------------------------------------	-------------------------	------------------------	------------------

DO NOT SCALE THIS DRAWING. CHECK ALL DIMENSIONS ON SITE

THIS DRAWING IS PROVIDED BY CONTRACT. IT MAY BE REVOKED IN FULL OR IN PART FOR ANY REASON. THE USER SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMISSIONS FROM ALL APPLICABLE AUTHORITIES.