

320161063P

Initial Arboricultural Impact Assessment

**in Relation to Proposed Partial Removal of Existing
Garage Building in Order to Form Vehicular Access at**



**62 Moor Lane, Clitheroe,
Lancashire, BB7 1AJ**

Prepared by:

Bowland 
Tree Consultancy Ltd

November 2016

**INITIAL ARBORICULTURAL IMPACT ASSESSMENT
62 MOOR LANE, CLITHEROE**

CONTENTS

1. TREE SURVEY SCHEDULE FOR ARBORICULTURAL IMPACT APPRAISAL &
BS5837:2012 – TABLE 1
2. TEMPORARY PROTECTIVE FENCING SPECIFICATION
3. TREE IMPACT PLAN

Contact Details

Bowland Tree Consultancy Ltd
First Floor
11 Cannon Street
Preston
Lancashire
PR1 3NR

T: 01772 437150
E: info@bowlandtreeconsultancy.co.uk

**INITIAL ARBORICULTURAL IMPACT ASSESSMENT
62 MOOR LANE, CLITHEROE**

Control sheet

Project No.: BTC1228

Site: 62 Moor Lane, Clitheroe, Lancashire, BB7 1AJ

Agent for Client: Stanton Andrews Architects

Council: Ribble Valley Borough Council

Survey Date: 19 November 2016

Surveyed by: Phill Harris MSc BSc(Hons) HND CEnv MArborA MICFor

Prepared by: Phill Harris MSc BSc(Hons) HND CEnv MArborA MICFor

Checked by: Richard Dunn HND

Date of Issue: 28 November 2016

Version No: 1

TREE SURVEY SCHEDULE FOR ARBORICULTURAL CONSTRAINTS APPRAISAL

Site: 62 Moor Lane, Clitheroe, Lancashire, BB7 1AJ

Agent for Client: Stanton Andrews Architects

Surveyor: Phill Harris – Chartered Arboriculturist
 Survey Date: 19 November 2016
 Job Ref: BTC1228

Page: 1 of 1

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA Radius (m)	RPA (m ²)
T1	Sycamore	13	400#	N 4 E 4 S 4 W 4	2 2	SM	G	- Not inspected in detail. - Growing in small area of river bank between retaining wall down to river and garage building. - Stem evidently close to wall of garage building. - Stem trifurcates at a height of approximately 2m.	Recommend structural surveyor inspect wall and stream banking for damage caused by tree.	10+	C1		72
G1	Ash, Goat Willow, Purple Plum, etc.	≤ 11.5	≤ 1x180 1x150 1x120 1x100 (ms)#	N ≤ 3 E ≤ 4 S ≤ 3 W ≤ 2	N/A ≥ 0	Y-SM	G	- Not inspected in detail. - Very closely spaced group of approximately five trees. - Growing in small area of river bank between retaining wall down to river and garage building. - Some stems in contact with wall.	- Remove all trees that have stems within 700mm of wall of garage building. - Recommend structural surveyor inspect wall and stream banking for damage caused by trees.	10+	C1	≤ 36	≤ 3.38
G2	Cherry Laurel	≤ 7	≤ 100#	N ≤ 2 E ≤ 2 S ≤ 2 W ≤ 2	N/A ≥ 0	SM	G	- Not inspected in detail. - Very closely spaced group of shrubs. - Growing in small area of river bank between retaining wall down to river and garage building.	Recommend structural surveyor inspect wall and stream banking for damage caused by shrubs.	10+	C1	≤ N/A	≤ 1.2

Headings and Abbreviations:

No. Common name
 Species: In metres, to nearest half metre – where possible approximately 80% are measured using an electronic clinometer and the remainder estimated against the measured trees. In the case of Groups and Woodlands the measurement listed is that of the highest tree
 Height: Stem diameter in millimetres, to nearest 10mm - measured and calculated as per Annex C of BS5837:2012. MS = multi-stemmed, TS = tall-stemmed
 Stem Diam.: Crown radius measured (or estimated where considered appropriate) from the four cardinal points (north, east, south and west) to give an accurate visual representation of the crown
 Branch Spread: Existing height above ground level, in metres, of first significant branch and direction of growth (e.g. 2.5-N) and of canopy at lowest point – to inform on crown to height ratio, potential for shading, etc.
 Branch & Canopy Clearances: Estimated age class - Y = young, SM = semi-mature, EM = early-mature, M = mature, PM = post-mature
 Life Stage: Physiological Condition - a measure of the tree's overall vitality. Ls. D = Dead, MD = Maribund, P = Poor, M = Moderate, G = Good
 PC: Comments relating to the tree's overall condition and any other pertinent factors including structural defects, current and potential direct structural damage, physiological decline, poor form, etc.
 General Observations and Comments: Either Preliminary or In Consideration of the Proposal - In the case of Arboricultural Constraints Surveys the recommended management works only take existing site and tree circumstances and conditions into account and not proposed developments. Arboricultural Impact Assessment and Method Statement related
 Management Recommendations: Surveys like the proposed development into consideration with recommendations made accordingly. More than one option may be given if considered appropriate

ERC: Surveys like the proposed development into consideration with recommendations made accordingly. More than one option may be given if considered appropriate
 Cat. Grade: Category Grading - tree retention value listed as U, A, B or G - in accordance with BS5837:2012 Table 1
 RPA m²: Root Protection Area in m² - calculated area around the tree that must be appropriately protected throughout the development process in order to avoid root damage
 RPA Radius (m): Root Protection Area Radius - in metres measured from the centre of the stem to the line of tree protection
 # (Estimated Dimensions): Where trees are located off-site, or are inaccessible for any other reason, and accurate measurements or other information cannot be taken then the information provided is estimated and is duly suffixed with a '#' symbol

BS5837:2012 Table 1 – Cascade Chart for Tree Quality Assessment

Category and definition	Criteria (including subcategories where appropriate)			Identification on plan
Trees unsuitable for retention (see Note)				
Category U Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years	- Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning) - Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline - Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality <i>Note: Category U trees can have existing or potential conservation value which it might be desirable to preserve; see BS5837:2012 paragraph 4.5.7.</i>			Red
Trees to be considered for retention				
Category A Trees of high quality with an estimated remaining life expectancy of at least 40 years	Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant and/or principal trees within an avenue)	1. Mainly arboricultural qualities	2. Mainly landscape qualities	Green
Category B Those of moderate quality and value: those in such a condition as to make a significant contribution. A minimum of 20 years is suggested.	Trees that might be included in the high category, but are downgraded because of impaired condition. Examples include the presence of remediable defects including unsympathetic past management and minor storm damage	Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features		
Category C Those trees of low quality and value: currently in adequate condition to remain until new planting could be established - a minimum of 10 years is suggested - or young trees with a stem diameter below 150 mm	Trees not qualifying in higher categories	Trees present in numbers, usually as groups or woodlands, so they form distinct landscape features which attract a higher collective rating than they might as individuals. But which are not, individually, essential components of formal or semi-formal arboricultural features. For example, trees of moderate quality within an avenue that includes better, A category specimens. Or trees which are internal to the site, therefore individually having little visual impact on the wider locality		Blue
	Trees present in groups or woodlands, but without this conferring on them significantly greater landscape value, and/or trees offering low or only temporary screening benefit		Trees with clearly identifiable conservation or other cultural benefits	Grey
Note – Whilst C category trees will usually not be retained where they would impose a significant constraint on development, young trees with a stem diameter of less than 150mm should be considered for relocation			Trees with very limited conservation or other cultural benefits	

DISCLAIMER

Survey Limitations: Unless otherwise stated all trees are surveyed from ground level using non-invasive techniques. The disclosure of hidden crown and stem defects, in particular where they may be above a reachable height or where trees are ivy clad or in areas of ground vegetation, cannot therefore be expected. All obvious defects, however, are reported. Detailed tree safety appraisals are only carried out under specific written instructions. Comments upon evident tree safety relate to the condition of said tree at the time of the survey only.

Unless otherwise stated all trees should be re-inspected annually in order to appraise their on-going mechanical integrity and physiological condition. It should, however, be recognised that tree condition is subject to change, for example due to the effects of disease, decay, high winds, development works, etc. Changes in land use or site conditions (e.g. development that increases access frequency) and the occurrence of severe weather incidents are also significant considerations with regards tree structural integrity and trees should therefore be re-assessed in the context of such changes and/or incidents and inspected at intervals relative to identified and varying site conditions and associated risks.

Where trees are located wholly or partially on neighbouring private third-party land then said land is not accessed and our inspection is therefore restricted to what can reasonably be seen from within the site. Stem diameters of trees located on such land are estimated. Any subsequent comments and judgments made in respect of such trees are based on these restrictions and are our preliminary opinion only. Recommendations for works to neighbouring third-party trees are only made where a potentially unacceptable risk to persons and/or property has been identified during our survey. Where significant structural defects of third-party trees are identified and associated management works are considered essential to negate any risk of harm and/or damage then we will first attempt to inform the site occupier of the issues and, if not possible, then inform the relevant Council. Where a more detailed assessment is considered necessary then appropriate recommendations are set out in the Tree Survey Schedule.

Where tree stem locations are not included on the plan(s) provided then they are plotted at the time of the survey using, where appropriate and/or practicable, a combination of measurement triangulation and GPS co-ordination. Where this is not possible then locations are estimated. Restrictions in these respects are detailed in the report.

The tree survey and any report information provided is intended as a guide to identify key tree related constraints to site development only. As such, the potential influence of trees upon existing or proposed buildings or other structures resulting from the effects of their roots abstracting water from shrinkable load-bearing soils is not considered herein. The tree survey information in its current form should not therefore be considered sufficient to determine appropriate foundation depths for new buildings. Accordingly, an updated survey, with reference to the current NHBC Standards Chapter 4.2 - Building Near Trees, must therefore be prepared for the specific purpose of informing suitable foundation depths subsequent to planning approval being granted. The advice of a structural engineer must also be sought with regard to appropriate foundation depths for new buildings.

Copyright & Non-Disclosure Notice: The content and layout of this report are subject to copyright owned by Bowland Tree Consultancy Ltd, save to the extent that copyright has been legally assigned to us by another party or is used by Bowland Tree Consultancy Ltd under license. This report may not be copied or used without our prior written agreement for any purpose other than those indicated.

Third Parties: Any disclosure of this document to a third party is subject to this disclaimer. The report was prepared by Bowland Tree Consultancy Ltd at the instruction of and for use by our client, as named. This report does not in any way constitute advice to any third party who is able to access it by any means. Bowland Tree Consultancy Ltd excludes to the fullest extent lawfully permitted all liability whatsoever for any loss or damage arising from reliance on the contents of this report.


- TEMPORARY PROTECTIVE FENCING & GROUND PROTECTION SPECIFICATION -

Construction Exclusion Zones (CEZs), shall be enclosed by **Temporary Protective Fencing** and/or, where necessary, **Temporary Ground Protection Measures**. The fencing/ground protection Type(s), locations, and extents shall be agreed, in writing, with the Local Planning Authority (LPA). In turn, the **Temporary Protective Fencing** and/or **Temporary Ground Protection Measures** shall:

1. be constructed as in accordance with the Type 1, Type 2 or Type 3 'Temporary Protective Fencing Construction' sections and, where applicable the 'Temporary Ground Protection Measures' section, as detailed herein and agreed, in advance with the LPA;
1. be retained in place throughout the development process until completion of the project, and only removed following receipt of written permission from the LPA;
2. be sited in the area(s) defined by the Root Protection Areas on the associated Tree Impact Plan, or as the CEZs on the Tree Protection Plan;
3. be erected prior to any construction, demolition or excavation works and remain in place for the duration of the project;
4. preclude any delivery of site accommodation and/or materials and/or plant machinery;
5. preclude all construction related activity, with the sole exception of specified arboricultural works and any other works to be carried out under supervision that have been agreed by all parties;
6. preclude the storage of all development related materials and substances including fuels, oils, additives, cement and/or any other deleterious substance; and
7. be affixed with a 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1, below), at every 10.0 metre length of protective fencing.

Important: Any incursion into CEZs must be by prior arrangement, following consultation with the LPA.


Figure 1: CEZ Warning Sign

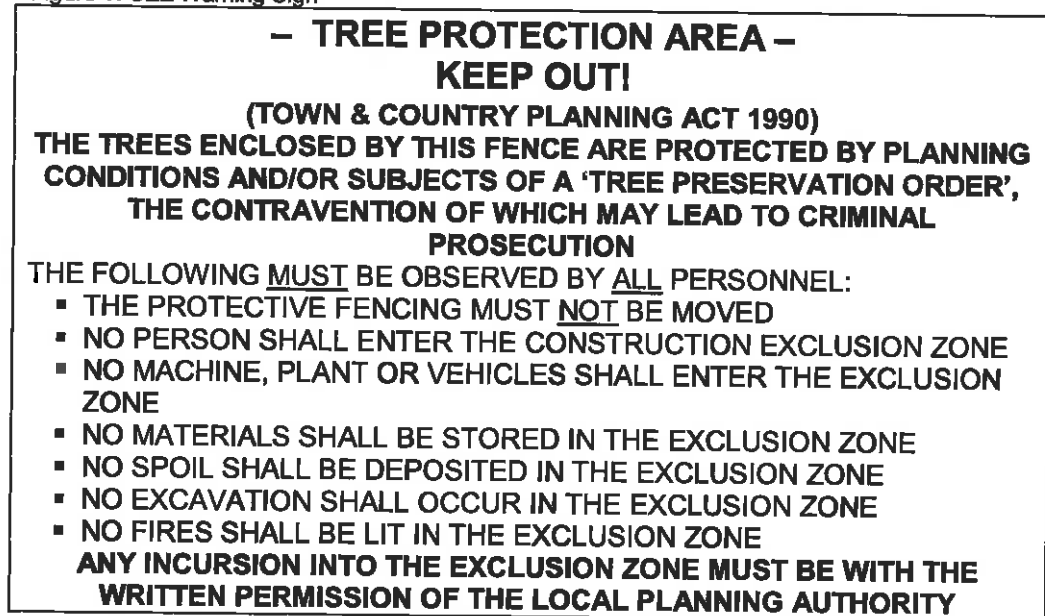

Type 1 (i.e. 'Default') Temporary Protective Fencing Construction (see Figure 2, below)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall butt together and be securely fixed to a scaffold framework, as per points 3 to 5 of Figure 2, overleaf.
3. The scaffold framework shall comprise of upright poles of at least 3.0 metres in length driven no less than 0.6 metres into the ground at maximum 3.0 metre centres with horizontal and diagonal poles fixed to the uprights, as per points 4 to 5.
4. The two horizontal rail poles shall be attached to the uprights at heights of 0.6 and 1.8 metres with 3 no. clamps to each joint.
5. The diagonal scaffold pole struts be clamped to the top rail of the scaffold framework at a 45° angle and extend back into the CEZ and clamped to a 0.7 metre length of scaffold tube that shall be driven no less than 0.5m into the ground.
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 2: BS5837:2012 Default specification for protective barrier

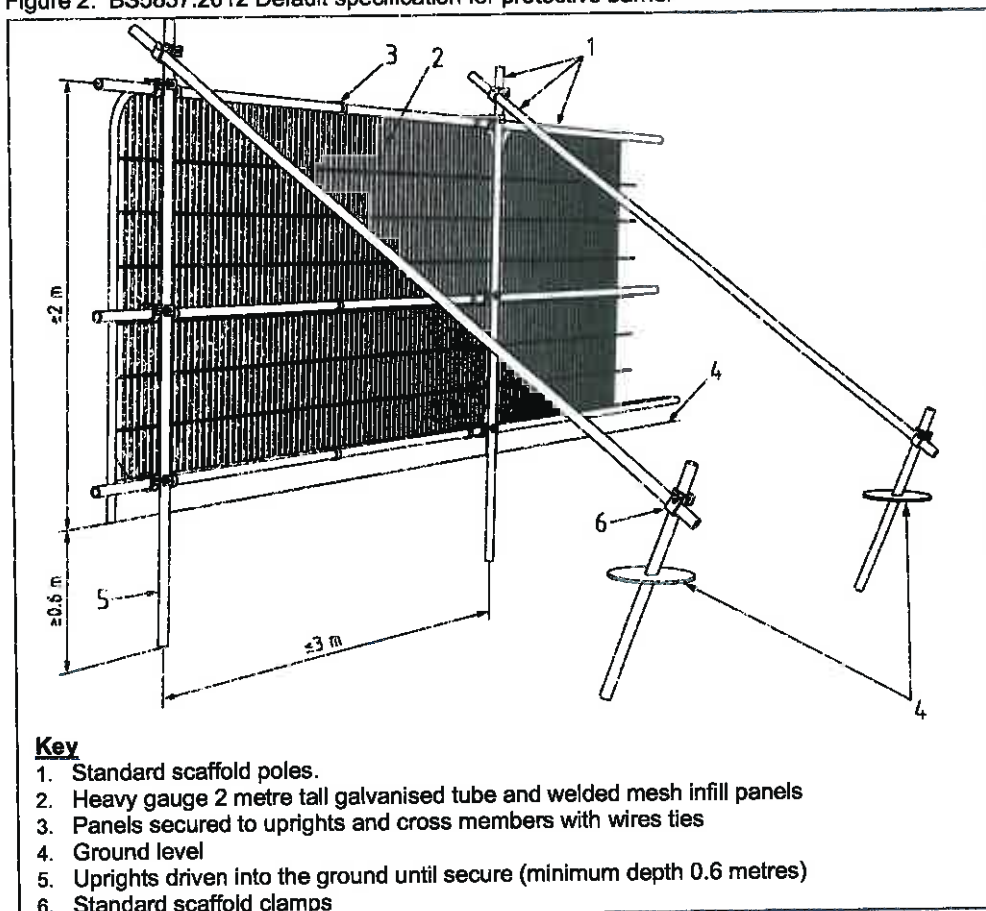

Type 2 Temporary Protective Fencing Construction (see Figure 3(a), below)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall stand on rubber or concrete feet.
3. The panels shall butt together, and be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence.
4. The distance between the fence couplers shall be at least 1.0 metre, and shall be uniform throughout the fence.
5. The panels shall be supported on the inner side by stabiliser struts, which shall be clamped to the scaffold framework at a 45° angle and extend back into the CEZ and shall be attached to a base plate, which shall be secured to the ground with pins (Figure 3a).
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 3(a): Type 2 Fencing (BS5837:2012 above-ground strut stabilising system with ground pins)

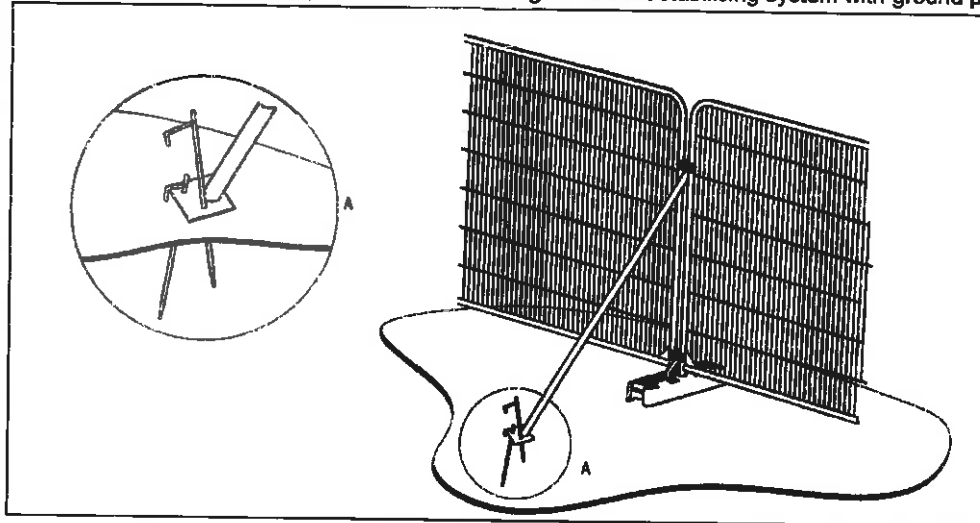

Type 3 Temporary Protective Fencing Construction (see Figure 3(b), overleaf)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall stand on rubber or concrete feet.
3. The panels shall butt together, and be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence.
4. The distance between the fence couplers shall be at least 1.0 metre, and shall be uniform throughout the fence.
5. The panels shall be supported on the inner side by stabiliser struts, which shall be clamped to the scaffold framework at a 45° angle and extend back into the CEZ and shall be attached to a block tray base (Figure 3b).
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 3(b): Type 3 Fencing (BS5837:2012 above-ground stabilising system with strut on block tray)

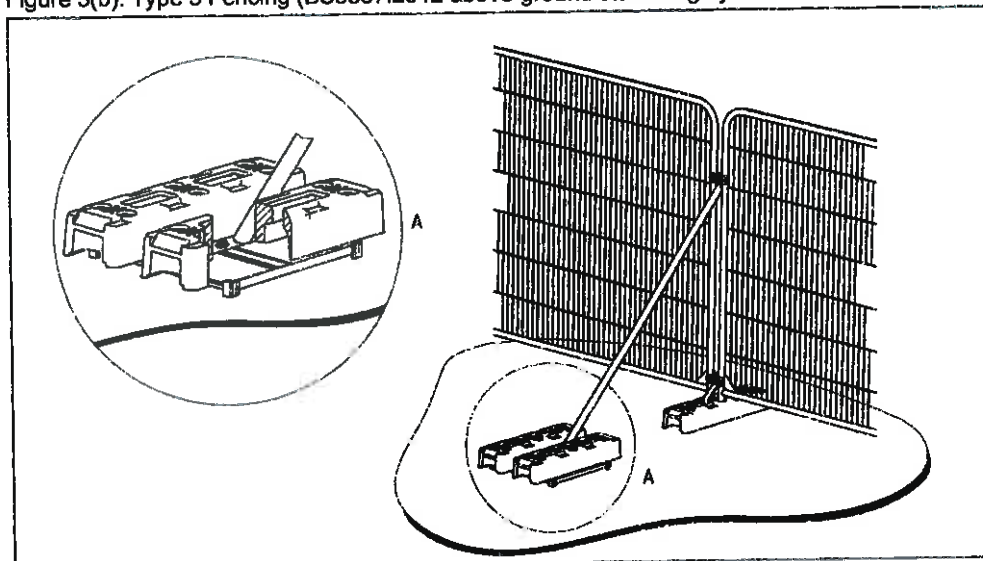

Temporary Ground Protection

2. Any necessary Temporary Ground Protection areas shall conform to Figure 4, below, unless otherwise agreed with the LPA.
3. The Ground Protection Area shall be left undisturbed and covered by a semi-permeable geotextile membrane which shall, in turn, be covered by a compressible layer consisting of a material such as woodchip.
4. Side-butting scaffold boards shall then be fitted to cover the Ground Protection Area.
5. On completion of installation, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Ground Protection.
6. The Temporary Ground Protection shall remain in place until completion of the project and only removed following receipt of written permission from the LPA.

Figure 4: Temporary Ground Protection – Recommended Construction

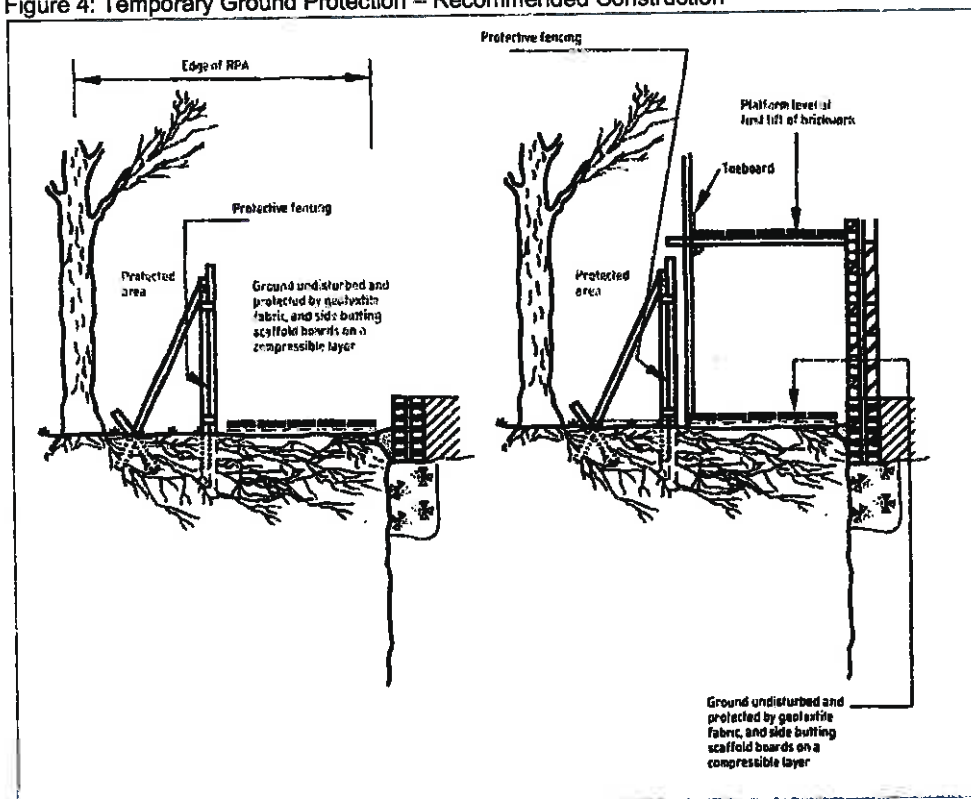

KEY

T = Individual Tree
G = Group of Trees
H = Hedge

Trees to be removed (i.e. many identified for removal in respect of them being:
- Dead
- Severely damaged
- In the way of development

Tree Categories:

Category 'A' - TreeGroup-Hedge
Trees of a high quality with an estimated remaining life expectancy of at least 40 years

Category 'B' - TreeGroup-Hedge
Trees of a high quality with an estimated remaining life expectancy of at least 25 years

Category 'C' - TreeGroup-Hedge
Trees of a low quality with an estimated remaining life expectancy of at least 10 years or young trees

Category 'D' - TreeGroup-Hedge
Trees of a low quality with an estimated remaining life expectancy of at least 10 years or young trees

Trees to be Considered for Retention:

Category 'A' - TreeGroup-Hedge
Trees to be retained in their current position and any necessary works should be carried out to ensure the health and safety of the trees and the safety of the public.

Category 'B' - TreeGroup-Hedge
Trees to be retained in their current position and any necessary works should be carried out to ensure the health and safety of the trees and the safety of the public.

Category 'C' - TreeGroup-Hedge
Trees to be retained in their current position and any necessary works should be carried out to ensure the health and safety of the trees and the safety of the public.

Category 'D' - TreeGroup-Hedge
Trees to be retained in their current position and any necessary works should be carried out to ensure the health and safety of the trees and the safety of the public.

Dead/Preservation Areas (DPA)
DPA is a designated area of land which is not to be developed and which should be preserved for the benefit of the community.

Preservation Area (PA)
PA is a designated area of land which is not to be developed and which should be preserved for the benefit of the community.

Project:
82 MOOR LANE
CLITHEROE
LANCASHIRE
BB7 1AJ

Agent for Client:
STANTON ANDREWS ARCHITECTS

Tree Impact Plan
In relation to Proposed Residential Development at Moor Lane, Clitheroe, Lancashire BB7 1AJ

Scale: 1:2000
Date: November 2018
Drawn by: PH
Checked by: JK

Bowland Tree Consultancy Ltd
a member of the Bowland Group
01773 677700

Ref: BTIC1234-123

Page:

The diagram is a site plan showing the layout of a property with various buildings and boundaries. Three specific areas are highlighted with pink circles and labels:

- G1**: A large area in the upper right, containing several trees.
- G2**: A smaller area in the center, containing a cluster of trees.
- T1**: A single tree located within the G2 area.

Annotations on the plan include:

- A dashed line indicating a boundary or path.
- A note: "Existing boundary walls to be reduced to 1100mm above internal floor level to reduce risk of fall from height and improve visibility."
 - Removal of roof and side structure will allow access for vehicles (comp) to assist in construction/building works associated with the adjacent existing area.
 - Concrete slab to be built in situ.
 - Trees not proposed to be felled upon as no works proposed below current ground level.

Annotation: This original version of the plan was produced in colour, which is essential to the plan's interpretation and usability. As such, a monochrome copy of the plan will be used upon.

