

3 2017 0262 P

Up/Down Wall Lights



In-Ground Up-Lights




LED Floods Under Eaves




Up/Down Wall Lights



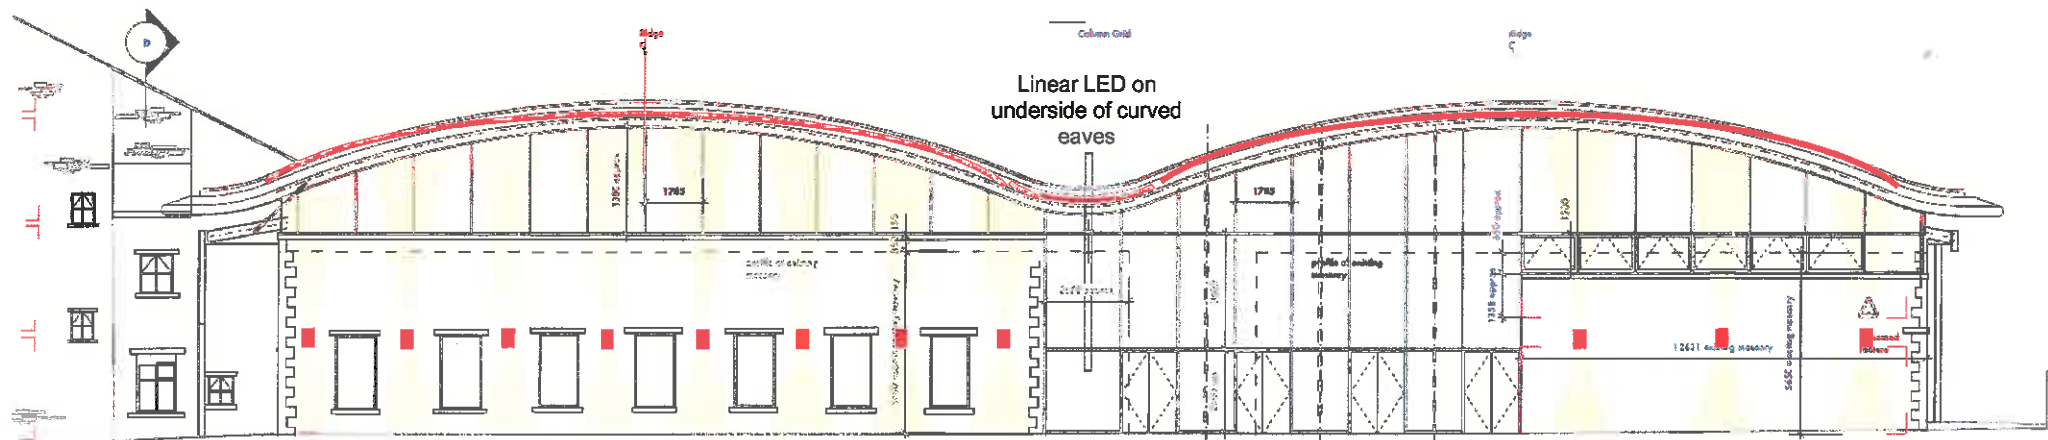

Up/Down Wall Lights

Up/Down Wall Lights

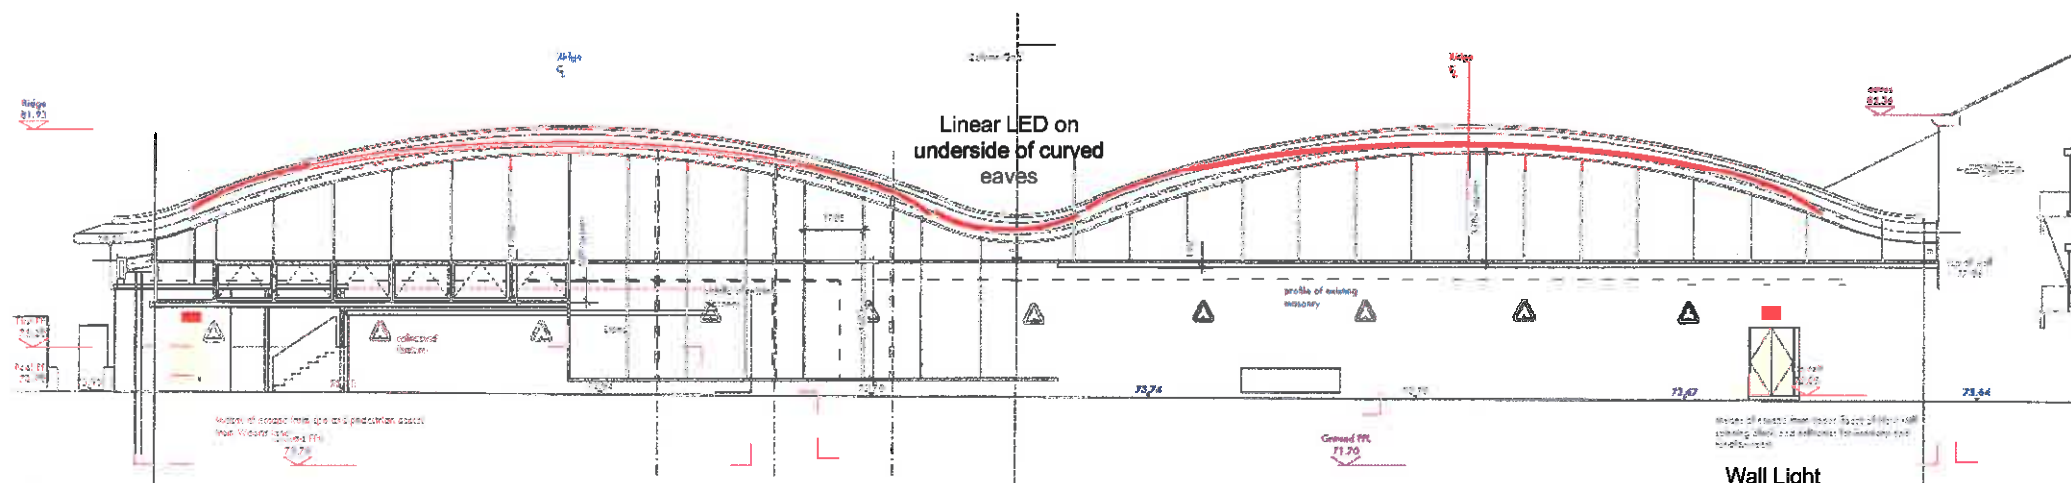

Wall Light



Examples of similar
lighting effects

GROUND LIGHTS

TECHNICAL SPECIFICATION SHEET




Also available in RGBW



Face view seen
along existing cutout

Dimensions

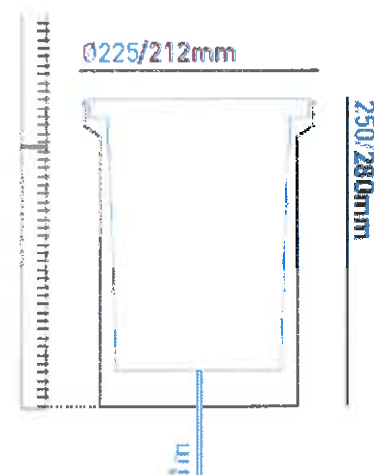

GL008A

TWIN LED DRIVE OVER GROUND LIGHT



Features & Benefits

Adjustable LED fittings

Equivalent to 50W Halogen & 100W AR111

Straight to mains

GENERAL

Bathroom zone	2
Construction material	Stainless Steel 316 (cover ring) / Aluminium (body)
Cut-out (mm)	N/A
Drive over / Walk over	Drive over (15mph max)
Face temperature when lit (°C)	32
Inrush current	14.9A 0.6ms
IP rating	67
IK rating	10
Maximum ambient temperature (ta = °C)	35
Rotation angle (°)	N/A
SELV (separated extra low voltage) driver	Yes (integral)
Tilt angle (°)	±20
Weight (kg)	4.7



TECHNICAL INFORMATION

Item No:	228525
Manual Instruction	Click Here to View
Name	ENOLA_C OUT UP-DOWN
Remark 1	LED driver 350 mA included
Big White Page	647
Colour	Anthracite
Material	Aluminium
Voltage	240
Beam Angle	35°
Safety Class	I
Energy Efficiency Index Fitting	A - A++
Average Life Span	40000
Way of mounting	Surface wall mounting
Light Source included	yes
Depth (cm)	14.6
Diameter (cm)	10
Maximum Wattage	22.3
Lamp Type	COB LED Module
IP Rating	55
Lamp Temperature	3000
Lumen Output	1500
Colour Rendering	>80





- Compact Solid Design
- Highly resilient Finish
- Even light Distribution
- Commercial, long lasting components, suitable for long hourly daily use.
- 3 years Warranty
- IP65
- 1M TRF Flylead
- Also available in ELV 12V/24V Marine Grade Finish suitable for salty wet harsh environment IP67.

FLA10DL	SLIM RANGE LED F/light 240V 10W 800lm 120' 6250K CRI80
FLA10WW	SLIM RANGE LED F/light 240V 10W 800lm 120' 3000K CRI80