

Tree Planting Schedule


Trees:
Native specimen trees 3m standards, staked and planted in the planting compost. (8-10cm) 4.5m + spacing.

12 Number trees comprising the following

1x Acer compense	(maple)
1x Betula pendula	(birch)
1x Ficus sylvatica	(beech)
1x Prunus avium	(cherry)
2x Quercus robur	(Oak)
2x Sorbus aucuparia	(Rowan)
2x Taxus baccata	(Yew)
2x Cedrus deodora	(Cedar)

Hedging:
45 – 90cm transplants at 45cm centre in a double staggered row –

Hedge row mix :-
-Blackthorn/Hawthorn 50%
-Hazel/Red maple/Holly 35%
-Crab apple/Chamber rose/Dog rose/Yield Privet/Honey suckle 15%
-Trees could include Ash, English oak and Sessile oak. AVOID ELDER

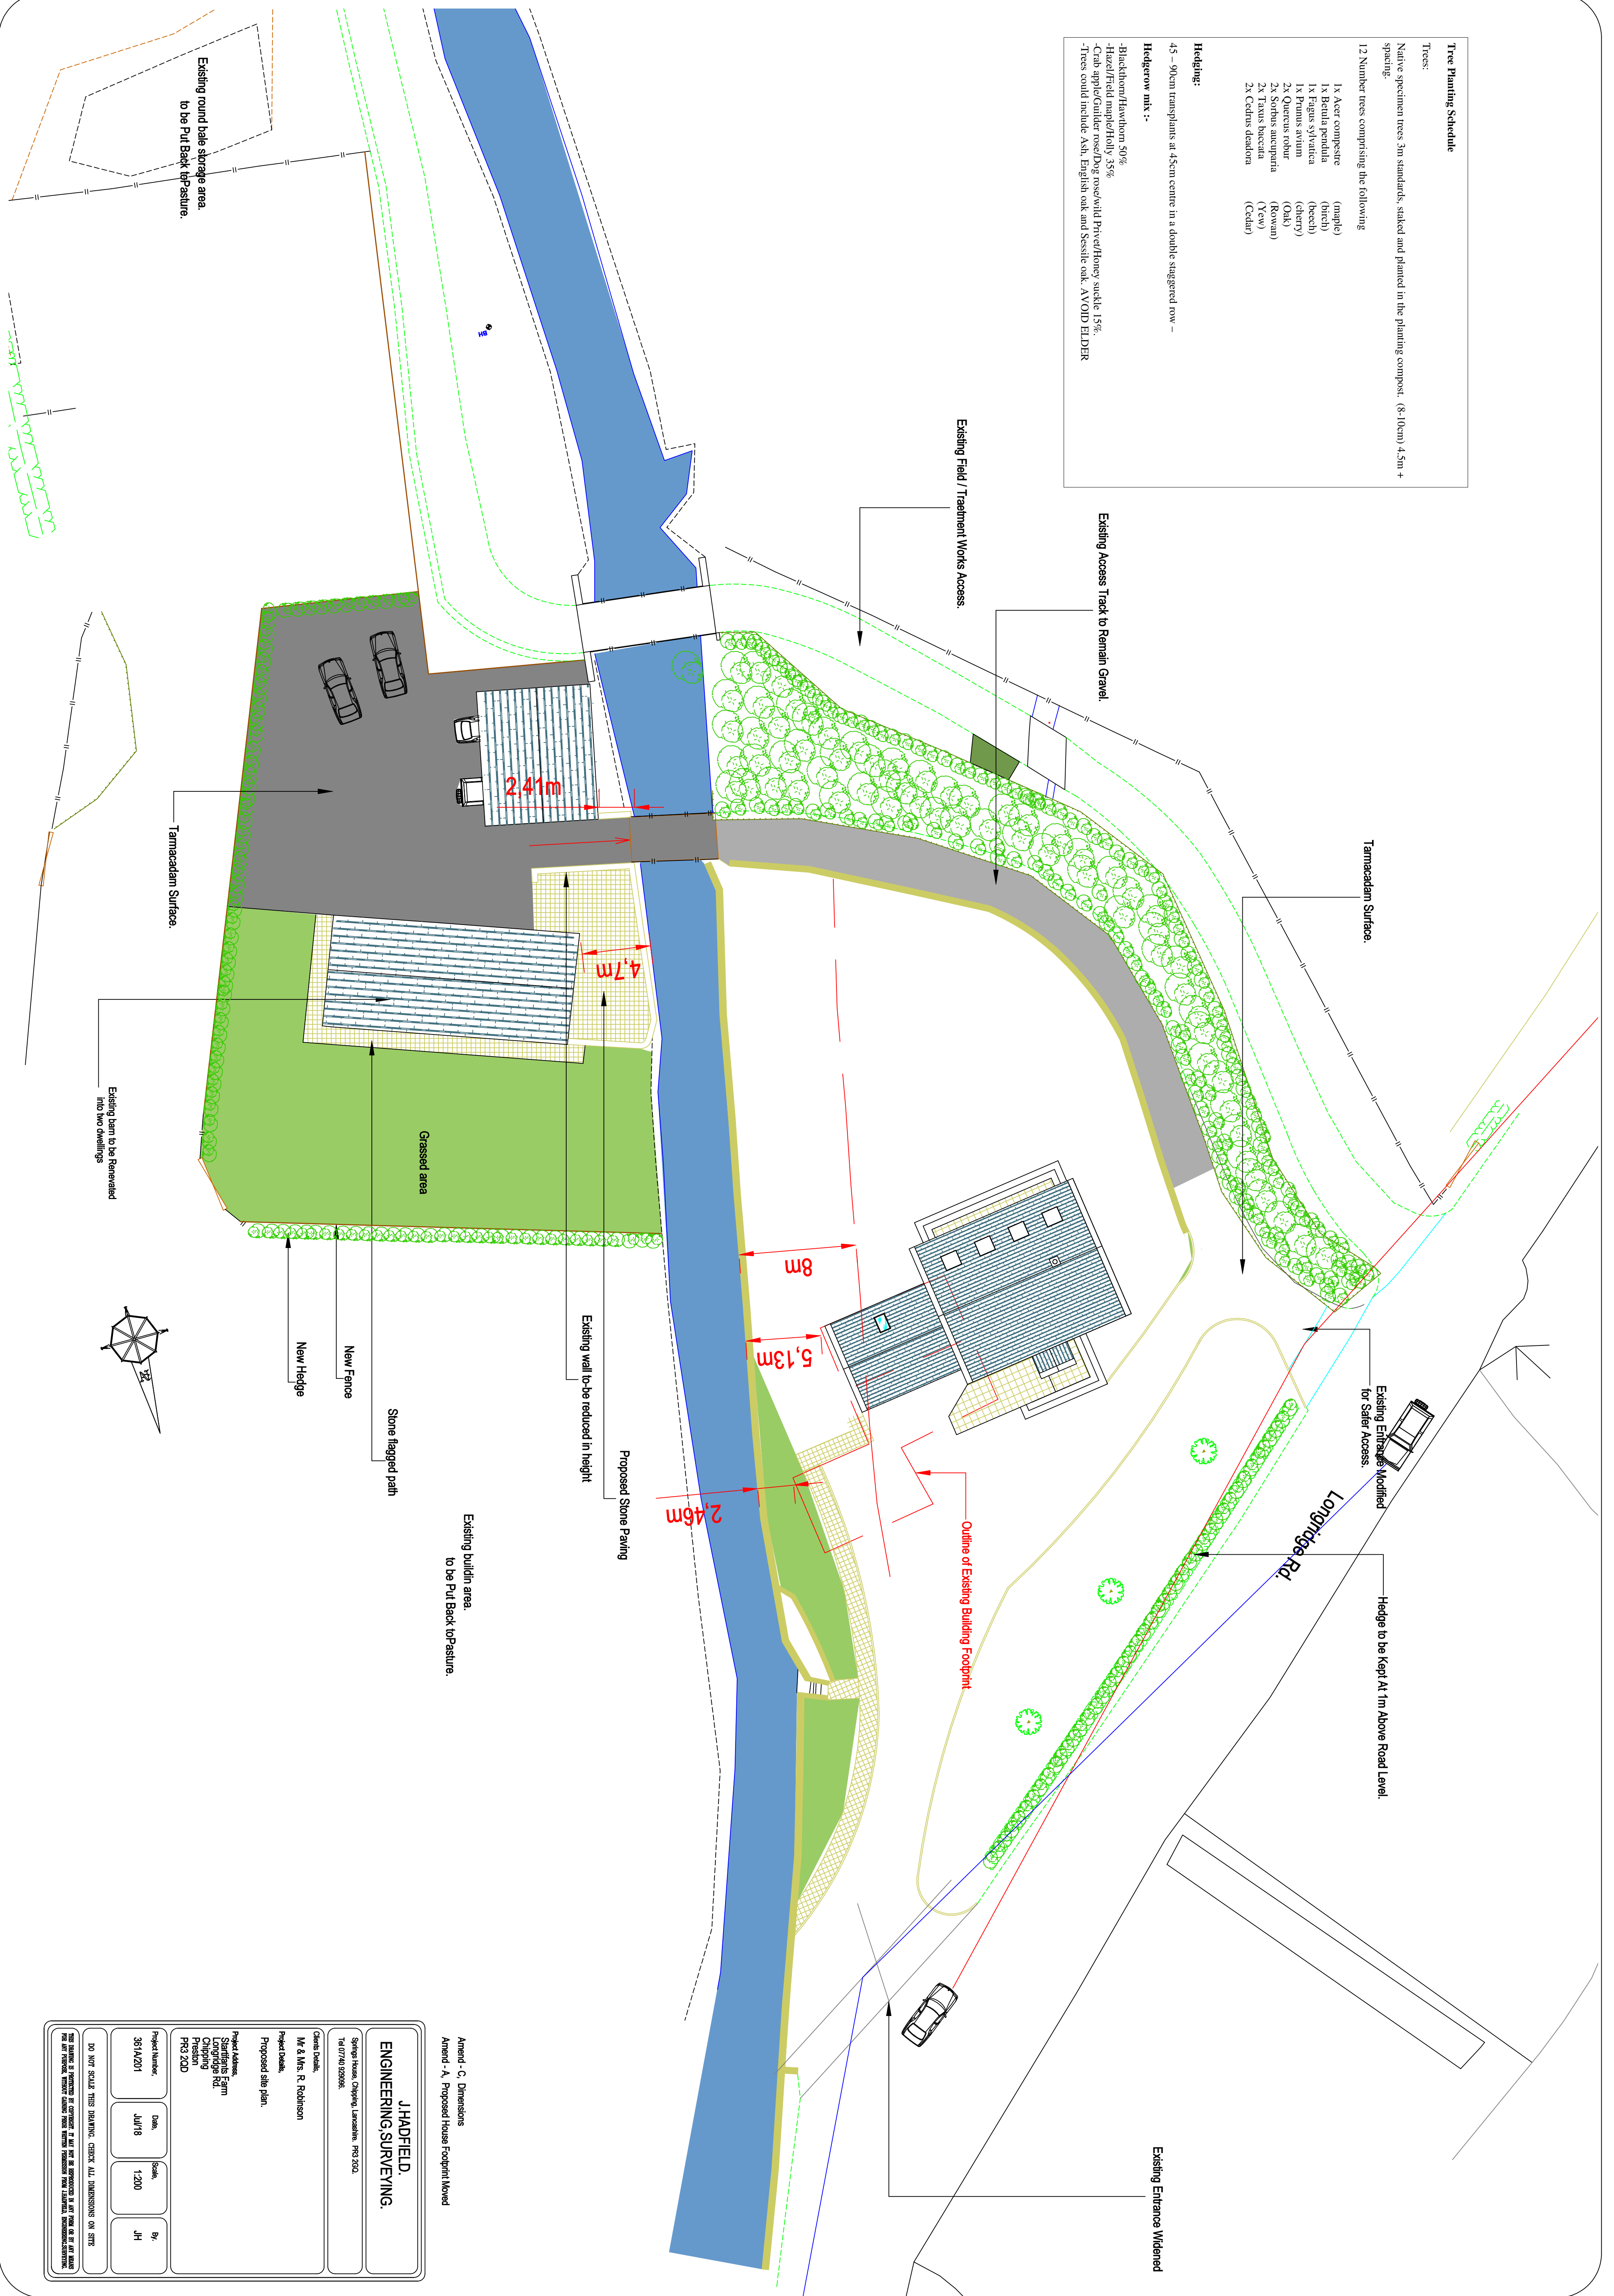

Amend - C, Dimensions
Amend - A, Proposed House Footprint Moved

J.HADFIELD,
ENGINEERING SURVEYING.

Stamp House, Chipping, Lancashire, PR3 2DQ
Tel: 07740 029095

Client Details:
Mr & Mrs. R. Robinson
Project Date:
Proposed site plan.

Project Address:
Stamp House Farm
Longridge Rd
Chipping
Preston
PR3 2DQ

Project Number:	Date:	Scale:	By:
351A/201	Jul/18	1:200	JH

DO NOT SCALE THIS DRAWING. CHECK ALL DIMENSIONS ON SITE

THIS DRAWING IS INTENDED TO CONFIRM THE MAIN LINE OF DIMENSIONS IN RELATION TO THE SITE AND NOT TO BE USED FOR CONSTRUCTION. THE CLIENT MUST OBTAIN NECESSARY PERMISSION FROM LANDLORD, LOCAL AUTHORITY AND OTHER RELEVANT BODIES BEFORE COMMENCING ANY WORK.