

NOW EVEN BETTER!

Monsoon Zone 1 Silence Range



IMPROVED PERFORMANCE

Can be installed with
longer duct runs

EASIER TO INSTALL

Easier wiring and
handy spirit level

QUIETER

Quieter than ever
- as low as 22dB(A)

Call now to find out more: 01823 690 290
www.nationalventilation.co.uk Email: info@nvagroup.co.uk




**NATIONAL
VENTILATION**

Manufacturers & suppliers
of  monsoon products

 **MADE IN THE UK**

5YR

Now with our
highest ever warranty

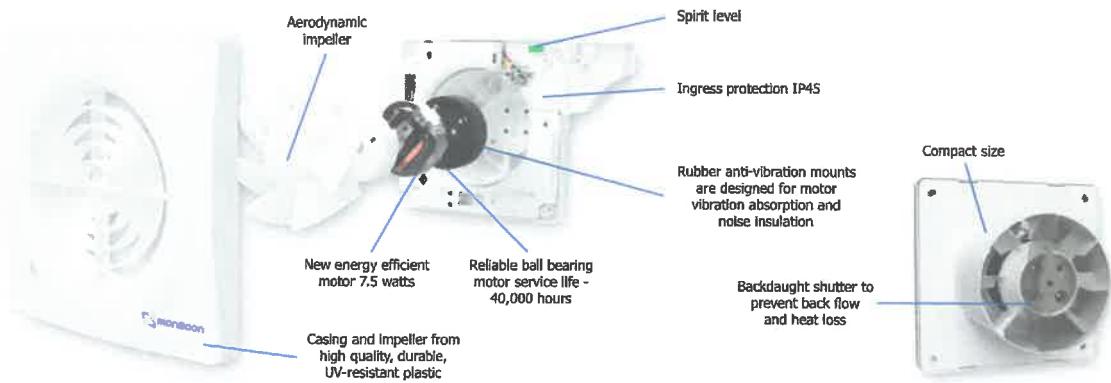

The new Monsoon Silence range is the latest innovative domestic ventilation solution, providing high extraction rates with low energy use and exceptionally quiet running levels. The fan comes with a long life ball bearing motor and a silent back draft shutter preventing air travelling back up the duct and into the room. The casing and impeller are made of durable high quality UV-resistant plastic, which helps to prevent degradation and discolouration of the plastic over time. The Mon-S100, S100T, S100HT and S100PC are also now available in a chrome finish, making this stylish fan match well with any modern interior.

Models available

100mm

CODE	DESCRIPTION
MON-S100	100mm Standard Model
MON-S100T	100mm Timer Model adjustable from 2-30 minutes
MON-S100HT	100mm Timer/Humidistat Model adjustable from 60 to 90%, 2 speed settings
MON-S100PC	100mm Pull-Cord Model
MON-S100PIR	100mm Passive Infrared Sensor Model c/w Timer

125mm

CODE	DESCRIPTION
MON-S125	125mm Standard Model
MON-S125T	125mm Timer Model adjustable from 2-30 minutes
MON-S125HT	125mm Timer/Humidistat Model adjustable from 60 to 90%, 2 speed settings, pulcord

150mm

CODE	DESCRIPTION
MON-S150	150mm Standard Model
MON-S150T	150mm Timer Model adjustable from 2-30 minutes
MON-S150HT	150mm Timer/Humidistat Model adjustable from 60 to 90%, 2 speed settings, pulcord


Call now to find out more: 01823 690 290

www.nationalventilation.co.uk Email: info@nvagroup.co.uk

Technical data


	MON-S100		MON-S125		MON-S150	
Speed	High	Low	High	Low	High	Low
Volts at 50 Hz (V)	230	230	230	230	230	230
Power (W)	7.5	5	15	11	22	14
Specific Fan Power (W/l/s)	0.33	0.25	0.30	0.27	0.22	0.18
Current (A)	0.051	0.049	0.083	0.067	0.1	0.09
Performance (l/s)	27	20	48	39	91	75
Sound @ 3m dB(A)	25	22	32	29	38	32
Weight (Kg)	0.55	0.55	0.78	0.78	1.33	1.33
IP rating	IP45	IP45	IP45	IP45	IP45	IP45

Performance Comparison

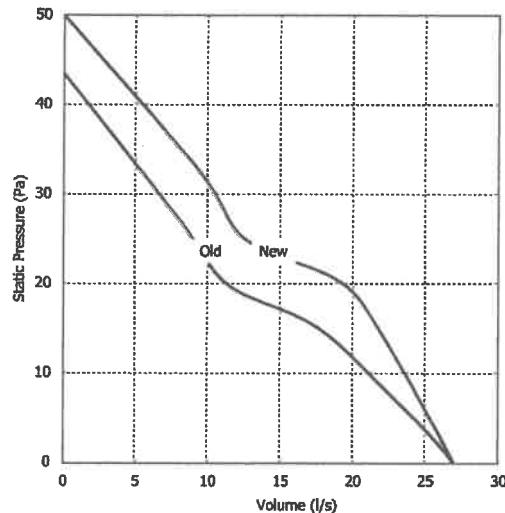

Dimensions

MODEL	H	W	L1	L2	ØD
MON-S100	160	160	22	80	99
MON-S125	185	185	29	100	120
MON-S150	227	227	30.5	111	146

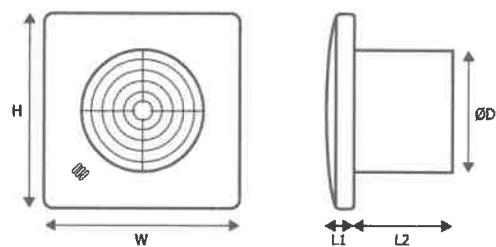

Call now to find out more: 01823 690 290
www.nationalventilation.co.uk Email: info@nvagroup.co.uk