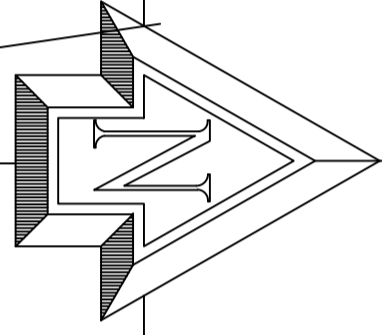


No trees are to be removed from the site.
 Existing land levels are not to be altered.
 Footpaths to be concrete curb edged and infilled with 20mm stone.
 The play equipment will be anchored on concrete bases designed by specialist contractors. Finished surface to be advanced Turf system.
 Play area to be securely fenced using Jacksons fencing 358 Secur-mesh height 2440mm post centres 2440mm post dimensions 80x60 powder coated green rail colour 6005.
 Car parking area is 6inch drainage stone with compacted recycled road tarmac plantings. Bike tracks through the woods are existing and are used by the owners. They are 6inch drainage stone with compacted recycled road plantings.
 NOTE: All the handstanding area is existing and is also shown on the existing site plan.












Proposed new development at:

Carr Hall
Walley Road
Langho
BB1 9LJ

ENTWISTLE DESIGN SERVICES
 7 Edgerfield
 Astley Village
 Chorley
 PR7 1XH
 Tel: 01257 274976
 E-Mail: entwistedesign@aol.com

CLIENT:	Mr A Donegan
DATE:	June 2020
SCALE:	1:500 @ A1
DWG No:	Proposed Site Plan Number 2
L.A.:	
AMENDMENTS:	DATE:



-  Route to glamping pods and parking area
 -  New Buildings
 -  Natural play area
 -  Handstanding/usable outdoor space
 -  Glamping pods
 -  Footpath
 -  Access road to site
 -  Parking area
 -  Bike Tracks are all existing
- Ward Bdy