


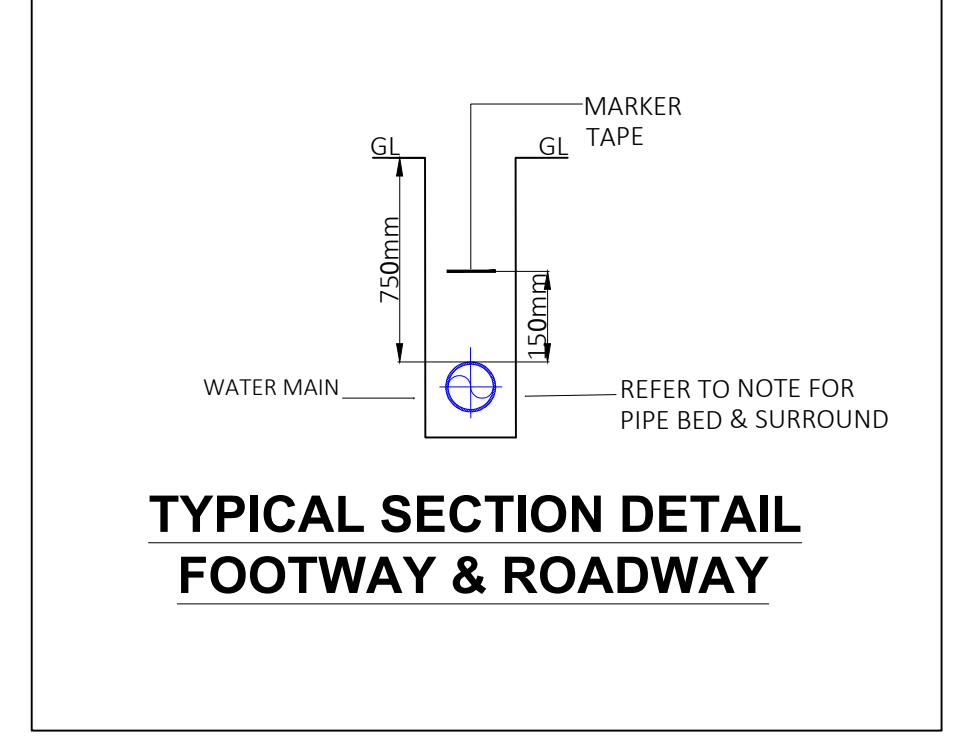

Notes:

GENERAL
1. THIS DRAWING IS FOR PLANNING PURPOSES. CONSULT ALL UTILITY PLANS BEFORE ANY EXCAVATIONS.
2. THIS DRAWING DOES NOT INTEND TO IDENTIFY THE EXACT POSITION OF THE EXISTING APPARATUS. LOCATION OF THE EXISTING APPARATUS MUST IN ALL CASES BE IDENTIFIED BY CONSULTING THE RELEVANT NETWORK OWNERS IN THE AREA.

SERVICE CONNECTIONS
ALL SERVICE PIPES TO BE 25mm WITH 15mm METERS UNLESS STATED OTHERWISE.

METERING LOCATIONS
IT IS UU POLICY THAT ALL NEW DOMESTIC PROPERTIES MUST BE METERED USING AMR METERS AND THE METER SHOULD BE INSTALLED INTERNALLY.

CONCRETEABLE WORKS
WATER MAIN LAYING AND SERVICES OFF THE NEW WATER MAIN PLOTS 1-31 and 33-50 TOTAL 49 PLOTS TO BE PROVIDED BY BGS.
TEMPORARY HYDRANT AT Y1-Y2 TO BE PROVIDED BY BGS.
BGS TO INSTALL ADVANCE BRANCH, VALVE AND TEMP WO AT X1.
BGS TO COMPLETE THE END CONNECTION AT X1.


NON-CONCRETEABLE WORKS
BGS TO COMPLETE END CONNECTIONS AT X2.
CONNECTIONS OFF EXISTING MAINS
PLOT 33 TO BE CONNECTED OFF EXISTING 43mm PE CONNECTIONS OFF NEW MAINS
PLOT 33 TO BE CONNECTED OFF EXISTING 43mm PE CONNECTIONS OFF NEW MAINS
PLOTS 1-31 AND 33-50 TOTAL 49 PLOTS TO BE COMPLETED BY BGS.

METERS
METERS TO PLOTS 1-30 TO BE INSTALLED BY BGS.

FIRE HYDRANTS
24H ON 90mm MAIN OUTSIDE PLOTS 27-40.

UNCONTRACTED LINES
ALL OPERATIVES MUST REFER TO THE HEALTH AND SAFETY PLAN.
ALL OPERATIVES MUST WEAR GLOVES, NOT SMOKE, EAT OR DRINK ON SITE AND MUST WASH HANDS AFTER WORKING.

SEWERAGE DETAILS
PLOTS 1-30 TOTAL OF 30 PLOTS TO BE CONNECTED TO UU FOUL AND SURFACE WATER SEWERS.

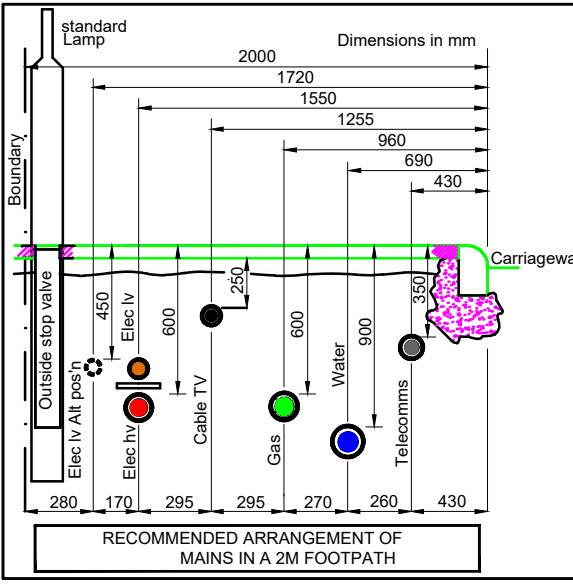

- LEGEND**
- EXISTING MAIN
 - MAIN TO BE ABANDONED
 - PROPOSED MAIN
 - PROPOSED COMMUNICATION PIPE
 - PROPOSED SUPPLY PIPE
 - PROPOSED DUCT
 - VALVE
 - DIAMETER CHANGE
 - POINT OF DELIVERY WITH BOUNDARY BOX
 - POINT OF DELIVERY WITH WALL METER
 - FIRE HYDRANT / WASH OUT
 - EXISTING FIRE HYDRANT / WASH OUT
 - AMR INTERNAL METER
 - AMR INTERNAL METER WITH WALL METER
 - AMR INTERNAL METER
 - AMR WALL MOUNTED METER BOX
 - AMR IN WALL METER BOX
 - BOUNDARY METER BOX

05	PIPE NEAR PLOT 32 TO REMAIN	CA	UNAPP.	22/02/2022
04	NOTES REFERRING THE DIVERSION WORKS REMOVED AND TEMPLATE AMENDED	OR	UNAPP.	11/02/2022
03	NOTES AMENDED	OR	UNAPP.	11/02/2022
02	DIVERTED MAINS ADDED	CA	UNAPP.	25/01/2022
01	FH ADDED	CA	UNAPP.	14/12/2021
00	FIRST DRAFTS	CA	UNAPP.	30/11/2021
REV.	DESCRIPTION:	BY:	STATUS:	DATE:

UU: 4100504568HF

DESIGNER: DAVID CONDE
07853 441818

OS REFERENCE: E: 372840 N:437274

DEVELOPER (DETAILS): Prospect Homes
Unit 5, Meridian Business Village
Hanby Drive, Liverpool
L24 9LG



ICP: BGS UTILITIES LTD
412 THE QUADRANT
WARRINGTON
WAS 6PW

SITE: Milton Road
Whalley
BB7 9RX

TITLE: WATER CONSTRUCTION PLAN

SCALE AT A2: 1:500
DATE: 18/11/2021
DRAWN: CA
CHECKED: DCI
DRAWING NO: DACI/2852-W01
ICP NO: SRN1855
DGT NO: 2852
REVISION: 05



SCHEDULE							
DIAMETER OF PIPE	PIPE MATERIAL	SDR RATING	LENGTH (m)	NUMBER OF FITTINGS			
				SV's	WO's	AV's	TEE's
63mm PE	PE 80	SDR11	472	7	7	-	1
90mm PE	PE 100	SDR17	134	-	-	-	4
125mm PE	PE 100	SDR17	-	-	-	-	-
180mm PE	PE 100	SDR17	-	-	-	-	-
250mm PE	PE 100	SDR17	-	-	-	-	-
TOTAL			606	7	7	-	5

EXCAVATION WIDTHS, PIPE BED & SURROUND THICKNESS												
DIAMETER OF MAIN	63mm	90mm	110mm	160mm	200mm	225mm	250mm	300mm	315mm			
NOMINAL EXCAVATION WIDTH	350mm	400mm	400mm	500mm	600mm	600mm	600mm	600mm	600mm			
PIPE BED AND SURROUND (COMPACTED)	50mm	75mm	75mm	100mm	100mm	150mm	150mm	150mm	150mm			

