

GENERAL CONSTRUCTION NOTES:-

STRIP BUILDING AREA OF ALL VEGETABLE MATTER AND RUBBISH. EXCAVATE TRENCH TO STRIP FOOTINGS ALONG CENTER LINE OF WALL TO A MAX DEPTH OF SOOMM BELOW INTERNAL FINISHED GROUND LEVEL OR TO SUITABLE SUB-STRATA AGREED ON SITE WITH APPOINTED BUILDING INSPECTOR AND STRUCTURAL ENGINEER. WIDTH OF FOOTINGS AS SPECIFIED BUT WHERE DIFFICULT GROUND CONDITIONS EXIST FOUNDATION CONSTRUCTION TO BE IN ACCORDANCE WITH CONSULTING ENGINEERS DESIGN DETAILS AND TO APPROVED DOCUMENT 'A' OF THE BUILDING REGULATION APPROVED DOCUMENTS. MIN WIDTH OF FOOTINGS TO BE 600MM X 200MM THK TO EXTERNAL CAVITY WALLS. WHERE APPLICABLE 400MM X 200MM THK FOOTINGS TO INTERNAL LOAD BEARING WALLS.

2. WALLS BELOW DPC:

EXTERNAL: 100MM CONC. COMMON/BLOCKWORK OR FLETTONS EXTERNAL LEAF UPTO A MIN OF 2 COURSES BELOW DPC. 110MM WIDE CAVITY FILLED WITH LEAN MIX CONC. TO WITHIN 225MM OF SW CEILING JOISTS AT MAX 600MM C/C WITH PROPRIETARY DPC LEVEL WITH TOP EDGE SPLAYED TO THE OUTSIDE. 150MM DENSE CONC. BLOCKWORK UPTO DPC LEVEL INNED LEAF. INTERNAL: 100MM CONC. COMMONS/BLOCKWORK UPTO DPC

3. DAMP PROOFING:

DAMP PROOF COURSES TO BE 1000G 'HYLOAD' OR SIMILAR APPROVED TO B.S. 743 AND AT A MIN 150MM ABOVE EXTERNAL GROUND FLOOR LEVEL AND LAPPED AND SEALED WITH DAMP PROOF MEMBRANE UNDER SLAB.

HORIZONTAL DPC'S UNDER CILLS OF OPENINGS AND LAPPED WITH 7. LINTELS: VERTICAL DPC'S WHERE BLOCKWORK CLOSES CAVITY AROUND DOOR AND WINDOW OPENINGS. CAVITY TRAY'S AND WEEPHOLES EVERY 4TH HEADER JOINT TO BE PROVIDED OVER OPENINGS AND ABOVE STRUCTURAL OPENINGS. AT JUNCTIONS, DPC'S AND CAVITY TRAYS TO BE PROVIDED TO ALL EXTERNAL METER BOXES, FLASHINGS TO BE CODE 4 LEAD, VALLEY'S TO BE CODE 5.

4. GROUND FLOOR: GROUND FLOOR TO BE CONSTRUCTED OF 50MM THICK

SAND/CEMENT SCREED ON 150MM THK IN-SITU CONC. SLAB INCORPORATING STEEL MESH REINFORCEMENT WITH MIN 50MM COVER TOP AND BOTTOM LAID DIRECTLY ONTO 100MM THICK KINGSPAN' INSULATION BOARDS OR SIMILAR APPROVED SANDWICHED 2 LAYERS OF VISQUEEN DPM I.E. 1ST LAYERS LAID ON TOP OF INSULATION BOARDS WITH 2ND LAYER LAID DIRECTLY 9. INTERNAL WASTE PIPES: BELOW AND ABOVE 50MM THK SAND BLINDING INTURN LAID ON TOP OF 300MM THICK HARDCORE WELL COMPACTED IN MAX 150MM THK LAYERS.

FIRST FLOOR & SECOND FLOOR LEVELS:

25MM THK TEG TIMBER FLOOR BOARDS FIXED DOWN ON TOP OF 225MM X 75MM SW TIMBER FLOOR JOISTS AT MAX 400MM C/C. NEW I.C. WHERE REQUIRED PROVIDE RODDING EYES AT BENDS 30MM X 5MM GALVANISED MILD STEEL STRAPS AT MAX 1800MM OF PIPES. INSPECTION CHAMBERS UPTO 650MM DEEP TO BE C/C BUILT INTO WALL AND FIXED TO 3 NO. FLOORS JOISTS. 150MM X 50MM SW BLOCKING NOGGINS UNDER STRAPS. PROVIDE SUITABLE PROPRIETARY STRUTTING BETWEEN JOISTS. ONE ROW OF STRUTTING FOR JOIST SPANS BETWEEN 2500MM AND 4500MM LOCAL AUTHORITY SPECIFICATION. AND TWO ROWS OF STRUTTING FOR SPANS OVER 4500MM. LINE SOFFITS OF JOISTS WITH 12.5MM PLASTERBOARDS WITH SITE SPECIFIC CEILING FINISH.

5. WALLS ABOVE DPC:

EXTERNAL WALLS: 320.0MM CAVITY CONSTRUCTION, 110MM RED FACING BRICKS SIMILAR IN COLOUR, TEXTURE AND SIZE TO MAIN TO BE VITRIFIED CLAY OR POLYPROPYLENE, UPTO 350MM DEEP DWELLING WALLS, 110MM WIDE CAVITY INCORPORATING 60MM THK TO BE POLYPROPYLENE. OVER 350MM DEEP TO BE PRE-CAST 'KINGSPAN' INSULATION BOARDS, IOOMM THK MEDIUM DENSITY BLOCKWORK INNER LEAF OR SIMILAR APPROVED PROPRIETARY BLOCKWORK TO ACHIEVE THE REQUIRED 'U' VALUE OF 0.28W/M2K. STAINLESS STEEL WALL TIES MIN 225MM LONG (TRIANGULAR TIES OR SIMILAR APPROVED) AT MAX 750MM HORIZONTAL C/C AND 450MM VERTICAL C/C EACH ROW OF TIES STAGGERED ON ABOVE THE OTHE. TIES AT OPENING POSITIONS TO BE AT MAX 225MM VERTICAL C/C.

INTERNAL WALLS: 100MM THK MEDIUM DENSITY OR LIGHTWT BLOCKWORK BUILT OFF NEW IN-SITU CONC. FOOTINGS WITH COMMONS UPTO DPC LEVEL AND BLOCKWORK ABOVE DPC TIED BACK TO INNER LEAF OF EXTERNAL CAVITY WALL. MIN 13MM PLASTER FINISH TO BOTH SIDES.

TIMBER STUD WALLS: CONSTRUCTED FROM 75MM X 50MM SW TIMBER STUDS AT MAX 600MM VERTICAL & HORIZONTAL C/C LINED ON BOTH SIDES WITH 12.5MM PLASTERBOARDS. JOINTS TO BE TAPED AND SCIMMED PRIOR TO APPLYING FINAL SCIM

MORTAR TO BE IN ACCORDANCE WITH B.S. 5628 PART 1 1978 AND MANUFACTURERS INSTRUCTIONS AND RECOMMENDATIONS. ALL CAVITIES TO BE KEPT CLEAN OF MORTAR.

6. ROOF CONSTRUCTION;

CONCRETE INTERLOCKING TILES OR NATURAL SLATES, (OR EQUIVLENT) CLIPPED OR NAILED EACH INDIVIDUAL TILE OR SLATE ON TO 50MM X 25MM TREATED S.W. TIMBER BATTENS AT THE MANUFACTURERS APPROVED GAUGE, ON ONE LAYER OF BREATHABLE MEMBRANE TO B.S. 5534 LAID TO ALLOW WATER TO DRAIN TO GUTTER ON S.W. TIMBER RAFTERS INSTALLED AT NOMINAL 30 DEGS ROOF PITCH UNLESS INDICATED ON X-SECTIONS DETAILS SUPPORTED OFF TIMBER/STEEL PURLINS IN ACCORDANCE WITH APPOINTED STRUCTURAL ENGINEERS DESIGN DETAILS AND STRUCTURAL CALCULATIONS, RAFTERS TIED DOWN AT AT BOTTOM END ONOT 75MM X 100MM S.W. WALLPLATES BEDDED IN CEMENT MORTAR WITH 30MM X 5MM THK X 1.0M LONG MILD STEEL STRAPS AT MAX 1.5M C/C.

225MM X 25MM UPVC FASCIA BOARDS WITH CONTINUOUS FILLET SCREW FIXED TO ENDS OF TIMBER RAFTERS. ROOF VENTILATION BY MEANS OF 'GLIDEVALE' OR SIMILAR APPROVED UPVC STRIP VENTS TO EAVES SOFFIT. 300MM THK FIBRE GLASS INSULATION QUILT LAID BETWEEN 100MM X 50MM SYSTEM INSULATION GUARDS AT EAVES LEVEL TO ENSURE MIN 25MM AIR GAP ALL ROUND, FIX TO UNDERSIDE OF CEILING JOISTS VISQUEEN VAPOUR BARRIER OR SIMILAR APPROVED AND LINE WITH 1/2HR FIRE RESISTENCE BOARDS AND SCIM

NOTE: JOINTS TO BE SCRIMMED AND TAPED PRIOR TO FINAL SCIMMING. ALLOW FOR ACCESS HATCH TO ROOF SPACE WITH SW LINING AND WALK BOARD'S TO TANK.

GALVANISED STEEL COMBINED LINTELS (I.G. OR SIMILAR APPROVED) WITH MIN 150MM END BEARINGS AT EACH END

8. DOORS AND WINDOWS. EXTERNAL DOOR'S AND WINDOW'S TO MANUFACTURERS RANGE. WINDOW'S TO ACHIEVE 1/10TH FLOOR AREA FOR GLAZING AREA AND 1/20TH FLOOR AREA FOR VENTILATION. ALL GLAZING TO BE SEALED DOUBLE GLAZED UNITS AND TO B.S. 7412, 7413 & B.S. 7950. FRAMES TO BE POINTED WITH AN APPROVED MASTIC TYPE AND STYLE WINDOWS. DOORS AND

IRONMONGERY TO BE SEPARATLEY APPROVED BY CLIENT

PRIOR TO PLACING ANY ORDER'S.

W.C. TO HAVE P-TRAP AND CONNECTED TO SOIL AND VENT PIPE. WASH HAND BASIN TO HAVE 32MM DIA WASTE OUTLET TO 75MM DEEP SEAL ANTI VAC TRAP TO 32MM DIA WASTE TO BACK INLET GULLY, (B.I.G), TO INSPECTION CHAMBER, (I.C.). KITCHEN SINK TO HAVE A 38MM DIA WASTE TO B.I.G. EXTERNALLY MOUNTED HOMM DIA SOIL AND VENT PIPE TO 100MM DIA SUPERSLEEVE DRAIN OR SIMILAR APPROVED TO VITRIFIED CLAY OR POLYPROPYLENE, UPTO 950MM DEEP TO BE POLYPROPYLENE. OVER 950MM DEEP TO BE PRE-CAST CONCRETE SECTIONS. ALL NEW HIGHWAY WORKS TO BE TO

10. DRAINAGE: WORKS TO BE IN ACCORDANCE WITH B.S. 8301 1985 AND ANY ENGINEERS DRAWINGS. HOUSE DRAINS TO BE 100MM DIA SUPERSI EEVE I AID TO MANUFACTURERS INSTRUCTIONS AND RECOMMENDATIONS. INSPECTION CHAMBERS UPTO 650MM DEEP CONCRETE SECTIONS. ALL NEW HIGHWAY WORKS TO BE TO LOCAL AUTHORITY SPECIFICATION.

ALL PIPEWORKS IN ROOF SPACE TO BE INSULATED IN ACCORDANCE WITH B.S. 5422:2009.


SURFACE WATER: GUTTER TO BE MARLEY PREMIER 112MM HAKF ROUND OR

SIMILAR APPROVED LAID TO FALLS OF 1:600 DISCHARGING TO MARLEY 68MM DIAMETER CIRCULAR SECTION DOWNPIPES OR SIMILAR APPROVED: DISCHARGING TO 100MM DIAMETER SURFACE WATER DRAINS AS LAYOUT. LAID TO FALL MIN. 1:80 DISCHARGING INTO EXISTING 225MM DIAMETER SURFACE WATER SEWER IN THE CIRCUIT.

ALL CONNECTIONS TO BE TO LOCAL AUTHORITY APPROVAL. ALL HARD SURFACES ADJACENT TO EXTERNAL WALLS OF THE HOUSES TO BE LAID TO FALL AWAY FROM THE

DRIVEWAYS LAID TO FALLS AS CAMBER AND AWAY TO

11. TRICKLE VENTS: TRICKLE VENTS TO HEADS OF ALL NEW WINDOW'S.

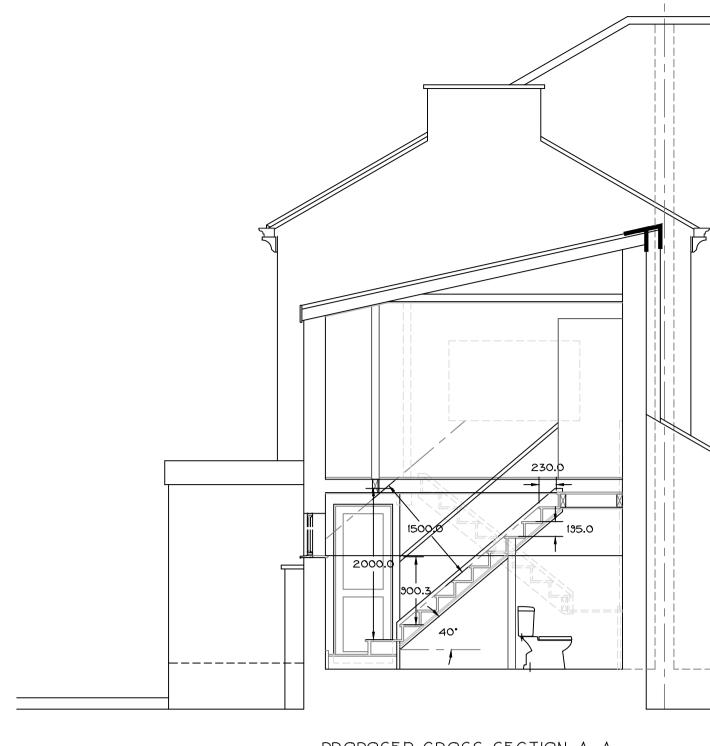

PROPOSED CROSS SECTION A-A. SCALE 1:50

ALL PIPEWORKS IN ROOF SPACE TO BE INSULATED IN ACCORDANCE WITH B.S. 5422:2009.

SURFACE WATER: GUTTER TO BE MARLEY PREMIER 112MM HAKE ROUND OR SIMILAR APPROVED LAID TO FALLS OF 1:600 DISCHARGING TO MARLEY 68MM DIAMETER CIRCULAR SECTION DOWNPIPES OR SIMILAR APPROVED: DISCHARGING TO 100MM DIAMETER SURFACE WATER DRAINS AS LAYOUT. LAID TO FALL MIN. 1:80 DISCHARGING INTO EXISTING 225MM DIAMETER SURFACE WATER SEWER IN THE CIRCUIT.

ALL CONNECTIONS TO BE TO LOCAL AUTHORITY APPROVAL.

ALL HARD SURFACES ADJACENT TO EXTERNAL WALLS OF THE HOUSES TO BE LAID TO FALL AWAY FROM THE

DRIVEWAYS LAID TO FALLS AS CAMBER AND AWAY TO

TRICKLE VENTS TO HEADS OF ALL NEW WINDOW'S.

ALL DRAINS TO BE 100MM DIAMETER 'HEPWORTH' 'SUPERSI EEVE' OR SIMILAR APPROVED BEDDED AND SURROUNDED IN MIN. 150MM PEA GRAVEL LAID TO FALLS.

DRAINS PASSING BENEATH BUILDINGS TO BE SURROUNDED IN 150MM CONCRETE WITH PROVISION FOR RETENTION OF FLEXIBILITY.

DRAINS PASSING THROUGH WALLS TO BE PROTECTED BY R.C. LINTELS AND HAVE MIN 50MM CLEARANCE PROTECTED BY VERMIN GUARD TO RIGID SHEET MATERIAL.

ALL GULLIES AND INSPECTION CHAMBERS TO BE 'HEPWORTH' OR SIMILAR APPROVED. DRAIN TRENCHES WITHIN 1.OM OF THE BUILDING SHOULD BE FILLED WITH CONCRETE TO A LEVEL EQUAL TO THE DISTANCE OF THE TRENCH FROM THE BUILDING LESS 150MM. ALL DRAINAGE INSTALLATIONS TO BE IN STRICT ACCORDANCE WITH MANUFACTURERS INSTRUCTIONS AND RECOMMENDATIONS AND TO THE APPROVAL OF THE APPOINTED BUILDING INSPECTOR.

SMOKE DETECTION:

TO BE PROVIDED AS INDICATED ON PLAN LAYOUTS. DETECTORS TO BE LINKED, PERMENENTLEY WIRED TO A SEPARATE FUSE ON THE DISTRIBUTION BOARD AND HAVE BATTERY BACK UP ALL TO B.S. 5839 PART 1 2017 AND FITTED IN STRICT ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS.

VENTILATION (GENERAL AND MECHANICAL):

KITCHEN:

TO HAVE AN OPENING WINDOW AND TO HAVE BACKGROUND VENTILATION OF 4000MM2. TO HAVE EXTRACT VENTILATION OF 30 LITRES PER SECOND IF ADJACENT TO HOB, OR 60 LITRES PER SECOND IF ELSEWHERE.

BATHROOMS WITH OPENABLE WINDOWS: TO HAVE BACKGROUND VENTILATION OF 4000MM2 TO HAVE MECHANICAL EXTRACT OF 15 LITRES PER SECOND LINKED TO LIGHT SWITCH.

BATHROOMS WITH NO OPENABLE WINDOWS: TO HAVE BACKGROUND VENTILATION OF 4000MM2.

TO HAVE MECHANICAL EXTRACT OF 15 LITRES PER SECOND, LINKED TO LIGHT SWITCH WITH 15 MINUTE OVER RUN TO HAVE AN AIR INLET INTO THE ROOM E.G. 10MM GAP BENEATH THE DOOR.

ALL ELECTRICAL WORK REQUIRED TO MEET THE REQUIRMENTS OF PART 'P' (ELECTRICAL SAFETY) MUST BE DESIGNED, INSTALLED, INSPECTED AND TESTED BY A PERSON COMPETENT TO DO SO, PRIOR TO COMPLETION THE APPOINTED BUILDING INSPECTOR SHOULD BE SATISFIED THAST THE PART 'P' HAS BEEN FULLY COMPLIED WITH, THIS MAY REQUIRE AN APPROPRIATE B.S. 7671 ELECTRICAL ISNTALLATION CERTIFICATE TO BE ISSUED FOR THE WORKS BY A PERSON COMPETENT TO DO SO.

NOTE: - ALL NEW GLAZING TO NEW WINDOW FRAMES TO BE PILKINGTON K' GLASS PANELS.

1. CEILINGS: AS PER CLIENTS REQUIREMENTS REMOVE LATH AND PLASTER TO EACH INDIVIDUAL ROOMS AS AGREED BETWEEN CLIENT AND CONTRACTOR. REMOVE ALL RUBBISH AND DEBRIS OFF SITE. REPLACE ANY CEILING JOISTS TO 1ST FLOOR CEILINGS AS NECESSARY REPLACE WITH NEW CEILING 12.5MM PLASTERBOARD SCREW FIXED TO EXISTING TIMBERS STAGGERED 3MM JOINTS FILLED WITH PLASTER & JUTE SCRIM CLOTH AND SCIMMED PRIOR TO APPLYING FINAL SCIM FINISH. PLASTER, ONE COAT 'THISTLE' BOARD FINISH OR OTHER EQUAL & APPROVED.

2. WALLS:- HACK OFF WALL PLASTER TO REQUIRED HEIGHTS AS AGREED WITH OWNER TO EACH INDIVIDUAL ROOMS, REMOVE TIMBER SKIRTINGS, REMOVE ALL RUBBISH AND DEBRIS OFF SITE. APPLY WATERPROOF RENDER TO FULL HEIGHTS AS AGREED, FINISH OFF WITH 3MM THK ONE COAT 'THISTLE' PLASTER FINISH. FIX SW TIMBER SKIRTING BOARDS EITHER SPLAYED OR MOULDED. APPLY 1 COAT PRIMER AND 1 COAT GLOSS PAINT FINISH.

3. WINDOWS: EXISTING WINDOWS TO BE REPLACED WITH NEW UPVC WINDOW FRAMES INCORPORATING DOUBLE GLAZED SEALED UNITS. GLAZING TO BE LOW 'E' GLASS ENERGY EFFICENCY GLAZING. REFER TO SECTION DETAIL THRU WINDOW FRAME, INCLUDE FOR ALL INTERNAL LININGS AND CILL BOARDS. WINDOWS TO BE INTERNALLY BEADED. ESCAPE WINDOWS TO HAVE SIDE OPENERS MIN 0.33M2. UPVC WINDOWS TO BS2782; REINFORCED WHERE APPRORIATE WITH ALUMINIUM ALLOY: INCLUDING STANDARD IRONMONGERY: CILLS AND GLAZING FIXED IN POSITION INCLUDING LUGS PLUGGED AND SCREWED TO BRICKWORK OR BLOCKWORK, CASEMENT, PROVISION FOR FIRE ESCAPE OPENING LIGHT; INCLUDING E.P.D.M. GLAZING AND WEATHER SEALS.

4. DOORS:- REFER ALSO TO NOTE 8 IN GENERAL NOTES SECTION. ALL EXISTING DOORS TO HAVE SELF CLOSURES INSTALLED. FLUSH DOORS, HALF HOUR FIRE CHECK (30/20), FACED BOTH SIDES, LIPPED ON ALL FOUR EDGES, PREMODOR CROSBY 'POPULAR FIRESHIELD' OR OTHER EQUAL AND APPROVED. SIZE OF DOOR TO SITE MEASURED PRIOR TO PLACING ORDER. IRONMONGERY, NT LAIDLAW LTD OT SIMILAR, STANDARD RANGES, TO HARDWOOD.

DOOR CLOSURES AND FURNITURE. 'CENTURION II' SIZE 3 OVERHEAD DOOR CLOUSRE, SIL OR SIMILAR APPROVED. FIRE STOPS, 'SEALMASTER' INTUMSECENT FIRE AND SMOKE SEALS OR OTHER EQUAL AND APPROVED. PINNED INTO GROOVE IN TIMBER.

5. EXISTING TIMBER FLOORS:- REMOVE DEFECTIVE FLOOR BOARDS AND REPLACE WITH SIMILAR SIZE TEG TIMBER FLOOD BOADDS SCREW FIXED DIRECTLY ONTO TIMBER FLOOR JOISTS. RENEW DEFECTIVE FLOOR JOISTS TREATED WITH PRESSURE IMPREGNATED. PRESERVATIVE. FLOOR FINISH TO CLIENTS REQUIRMENTS

6. EXTERNAL ROOF DRAINAGE: - RENEW GUTTERS REPLACE WITH SIMILAR PROFILE AND MATERIAL. THE CONTRACTOR SHALL ALLOW FOR ALL STOP ENDS, INTERNAL AND EXTERNAL ANGLES, EXPANSION JOINTS, HANGERS OR BRACKETS IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. RENEW DOWNPIPES IN 68MM DIAMETER CIRCULAR SECTION INCLUDING ALL BRANCHES, OFFSETS, COLLARS AND RAINWATER HOPPER HEADS AS NECESSARY, ALL FIXED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.

7. PITCHED SLATE ROOF: - EXISTING ROOF TO BE STRIPPED AND SLATES SET ASIDE, COVER ROOF WITH REINFORCED SARKING FELT TO B.S. 747 1977 TYPE IF WITH MINIMUM 150MM LAPS AND EXTENDING OVER PARTY WALLS. BATTENS MUST BE TANTLISED 50MMX 25MM FIXED WITH 65MM X 10G GLAVANISED ROUND WIRE NAILS, ALL DEFECTIVE SLATES SHOULD BE RENEWED. WHERE REPLACEMENT SLATES ARE USED THEY MUST BE GROUPED AND FIXED TOGETHER AT THE BOTTOM OF THE ROOF SLOPE IN ORDER TO MAINTAIN A NEAT ROOF LINE, WHERE THIS IS NOT POSSIBLE, REPLACEMENT SLATES OF A MATCHING THICKNESS MUST BE USED. SLATE MUST BE FIXED WITH A MIN. OF 2 No.10G GLAV. ROUND WIRE NAILS HAVING A LENGTH APPROPRIATE TO THE THICKNESS OF THE SLATE AND NOT LESS THAN 35MM UNDER ANY CIRCUMSTANCES.

DEFECTIVE TIMBER MUST BE COMPLETELY REMOVED AND REPLACED WITH GOOD QUALITY TIMBER OF A SECTION AT LEAST EQUAL TO THAT REMOVED AND TREATED PRIOR TO FIXING WITH PRESERVATIVE. SURROUNDING TIMBER MUST ALSO BE TREATED TO PREVENT ANY POSSIBLE RE-INFESTATION OR FURTHER DELAY.

6. EXTERNAL ROOF DRAINAGE:- RENEW GUTTERS REPLACE WITH SIMILAR PROFILE AND MATERIAL. THE CONTRACTOR SHALL ALLOW FOR ALL STOP ENDS, INTERNAL AND EXTERNAL ANGLES, EXPANSION JOINTS, HANGERS OR BRACKETS IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. RENEW DOWNPIPES IN 68MM DIAMETER CIRCULAR SECTION INCLUDING ALL BRANCHES, OFFSETS, COLLARS AND RAINWATER HOPPER HEADS AS NECESSARY, ALL FIXED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.

7. PITCHED SLATE ROOF: - EXISTING ROOF TO BE STRIPPED AND SLATES SET ASIDE, COVER ROOF WITH REINFORCED SARKING FELT TO B.S. 747 1977 TYPE IF WITH MINIMUM 150MM LAPS AND EXTENDING OVER PARTY WALLS. BATTENS MUST BE TANTLISED 50MMX 25MM FIXED WITH 65MM X 10G GLAVANISED ROUND WIRE NAILS. ALL DEFECTIVE SLATES SHOULD BE RENEWED. WHERE REPLACEMENT SLATES ARE USED THEY MUST BE GROUPED AND FIXED TOGETHER AT THE BOTTOM OF THE ROOF SLOPE IN ORDER TO MAINTAIN A NEAT ROOF LINE. WHERE THIS IS NOT POSSIBLE, REPLACEMENT SLATES OF A MATCHING THICKNESS MUST BE USED. SLATE MUST BE FIXED WITH A MIN. OF 2 No.10G GLAV. ROUND WIRE NAILS HAVING A LENGTH APPROPRIATE TO THE THICKNESS OF THE SLATE AND NOT LESS THAN 35MM UNDER ANY CIRCUMSTANCES.

DEFECTIVE TIMBER MUST BE COMPLETELY REMOVED AND REPLACED WITH GOOD QUALITY TIMBER OF A SECTION AT LEAST EQUAL TO THAT REMOVED AND TREATED PRIOR TO FIXING WITH PRESERVATIVE. SURROUNDING TIMBER MUST ALSO BE TREATED TO PREVENT ANY POSSIBLE RE-INFESTATION OR FURTHER DELAY.

PROVIDE VENTILATION TO PITCHED ROOF. VENTIALTION TILES TO BE WILLAN OR SIMILAR APPROVED PROPPRIETARY VENTILATION SYSTEM.

STONE GUTTERS:- ALL STONE GUTTERS MUST BE CLEANED OUT, FLUSH POINTE WITH SAND/CEMENT AND LINED WITH CODE 5 LEAD. WITH OUTLETS. AND STOP ENDS PROPERLY FORMED. ALL JOINTS MUST BE LEAD BURNED.


PREAMBLES:-ALL MATERIALS TO COMPLY WITH THE REQUIREMENTS OF THE LATEST APPROPRAITE BRTISH STANDARDS.

MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE BRITISH STANDARD CODE OF PRACTICE 121, 101 FOR BRICKWORK.

COMMON BRICKS BELOW GROUND LEVEL SHALL BE SOLID BRICKS CLASS 3 - AVERAGE, COMPRESSIVE SRTENGTH 20N/MM SQUARE.


WHERE DOOR OR WINDOW FRAMES/LININGS ARE RENEWED OR NEW TIMBER PIECED IN THE PRICES SHALL INCLUDE FOR CUTTING OUT FOR BUTTS/HINGES OR LOCKS/CATCHES, ETC., AS NECESSARY, ALL REPLACEMENT TIMBER IS TO BE OF SIZE, PATTERN, AND SECTION AS EXISTING.

ALL PREPARED TIMBER IS TO BE TREATED, PRIMED AND UNDERCOATED ALL ROUND BEFORE FIXING.

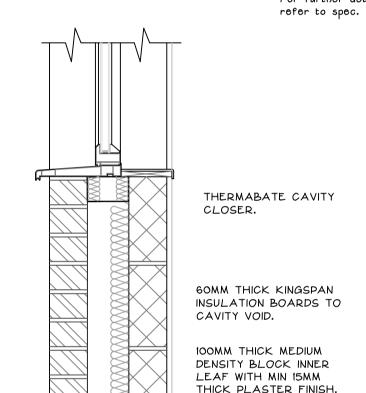


TYPICAL WINDOW CILL DETAIL.

SCALE 1:10

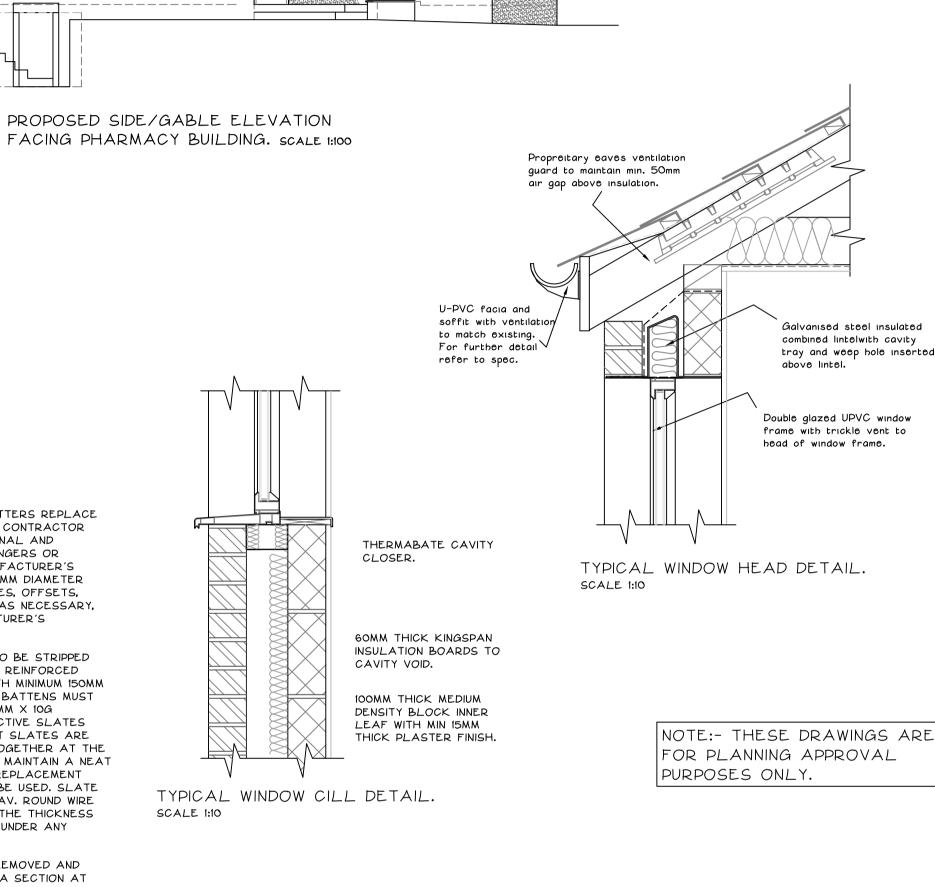

No reliance should be placed upon dimensions which are scaled off this drawing : please see annotations.

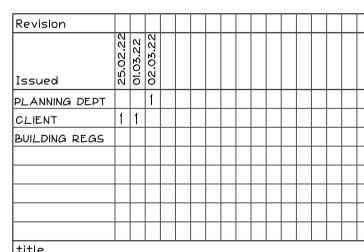

PROPOSED CHNAGE OF USE OF FIRST FLOOR LEVEL TO OFFICE USE AND REAR DOUBLE STOREY EXTENSION TO ENLARGE REAR EXISTING REAR ROOMS AT: 1A EAST VIEW TERRACE, LANGHO. BB6 8BX.

PROPOSED FIRST FLOOR PLAN, PROPOSED ELEVATIONS AND CROSS SECTIONAL ELEVATIONS.

YOUNUS KHAN ARCHITECTURAL CONSULTANT

'OUNUS KHAN B.A (HONS) ARCH. DIP. ARCH. DESIGN CONSULTANT EL + FAX BLACKBURN 01254 691988. MOBILE 07930 344601

date	drawn	checked	rev
FEB 2022			
scale	02		
1:50, 1:100	3563	02	