

**Tree Planting Schedule**

Trees:  
Native specimen trees 3m standards, staked and planted in the planting compost. (8-10cm) 4.5m + spacing.


12 Number trees comprising the following

1x Acer compostre	(maple)
1x Betula pendula	(birch)
1x Fagus sylvatica	(beech)
1x Prunus avium	(cherry)
2x Quercus robur	(Oak)
2x Sorbus aucuparia	(Rowan)
2x Taxus baccata	(Yew)
2x Cedrus deodora	(Cedar)

**Hedging:**  
45 – 90cm transplants at 45cm centre in a double staggered row –

**Hedgerow mix :-**

- Blackthorn/Hawthorn 50%
- Hazel/Field maple/Holly 35%
- Crab apple/Guelder rose/Dog rose/wild Privet/Honey suckle 15%.
- Trees could include Ash, English oak and Sessile oak. AVOID ELDER

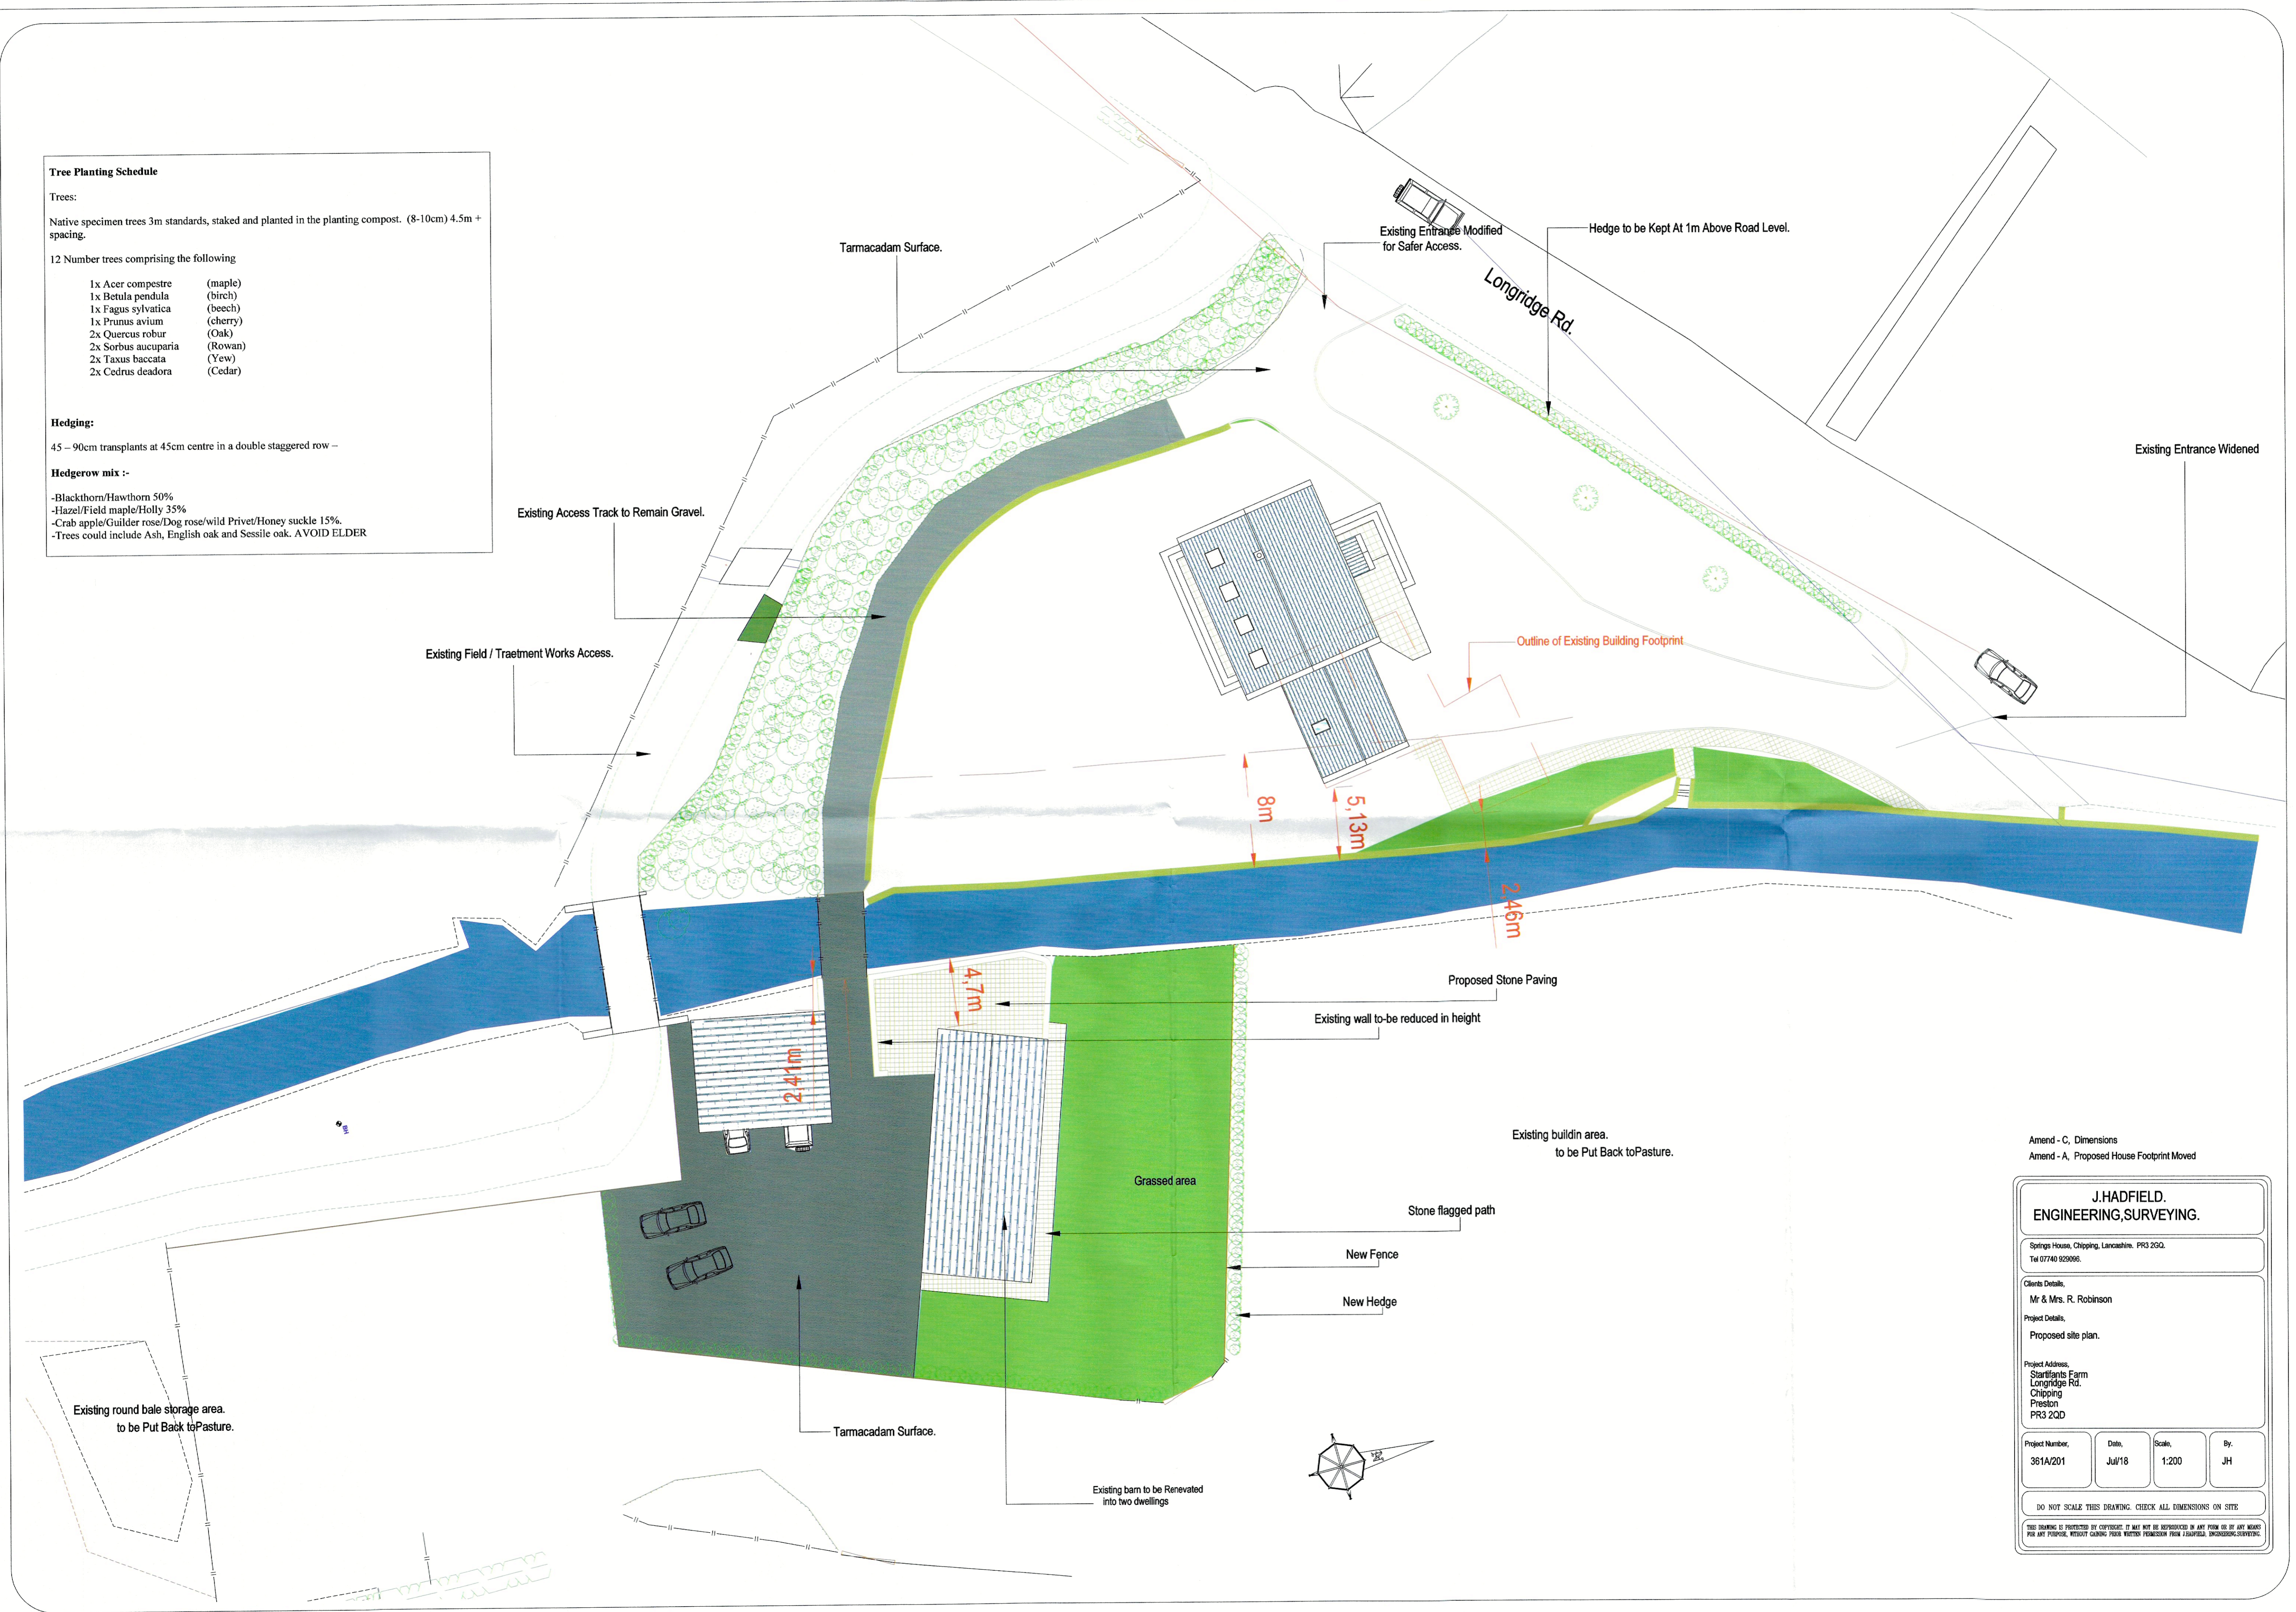

Amend - C, Dimensions  
Amend - A, Proposed House Footprint Moved

**J.HADFIELD.  
ENGINEERING,SURVEYING.**

Springs House, Chipping, Lancashire, PR3 2QD.  
Tel 07740 929993.

Client's Details:  
Mr & Mrs. R. Robinson

Project Details:  
Proposed site plan.

Project Address:  
Starfights Farm  
Longridge Rd.  
Chipping  
Preston  
PR3 2QD

Project Number, 381A/201	Date, Jul/18	Scale, 1:200	By, JH
-----------------------------	-----------------	-----------------	-----------

DO NOT SCALE THIS DRAWING. CHECK ALL DIMENSIONS ON SITE

THIS DRAWING IS PROTECTED BY COPYRIGHT. IT MAY NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS FOR ANY PURPOSE, WITHOUT WRITING FROM THE ENGINEERING SURVEYING.