

Tree Planting Schedule

Trees:

Native specimen trees 3m standards, staked and planted in the planting compost. (8-10cm) 4.5m + spacing.

12 Number trees comprising the following


- 1x Acer compesre (maple)
- 1x Betula pendula (birch)
- 1x Fagus sylvatica (beech)
- 1x Prunus avium (cherry)
- 2x Quercus robur (Oak)
- 2x Sorbus aucuparia (Rowan)
- 2x Taxus baccata (Yew)
- 2x Cedrus deodora (Cedar)

Hedging:

45 – 90cm transplants at 45cm centre in a double staggered row –

Hedgerow mix :-

- Blackthorn/Hawthorn 50%
- Hazel/Field maple/Holly 35%
- Crab apple/Guelder rose/Dog rose/wild Privet/Honey suckle 15%
- Trees could include Ash, English oak and Sessile oak. AVOID ELDER

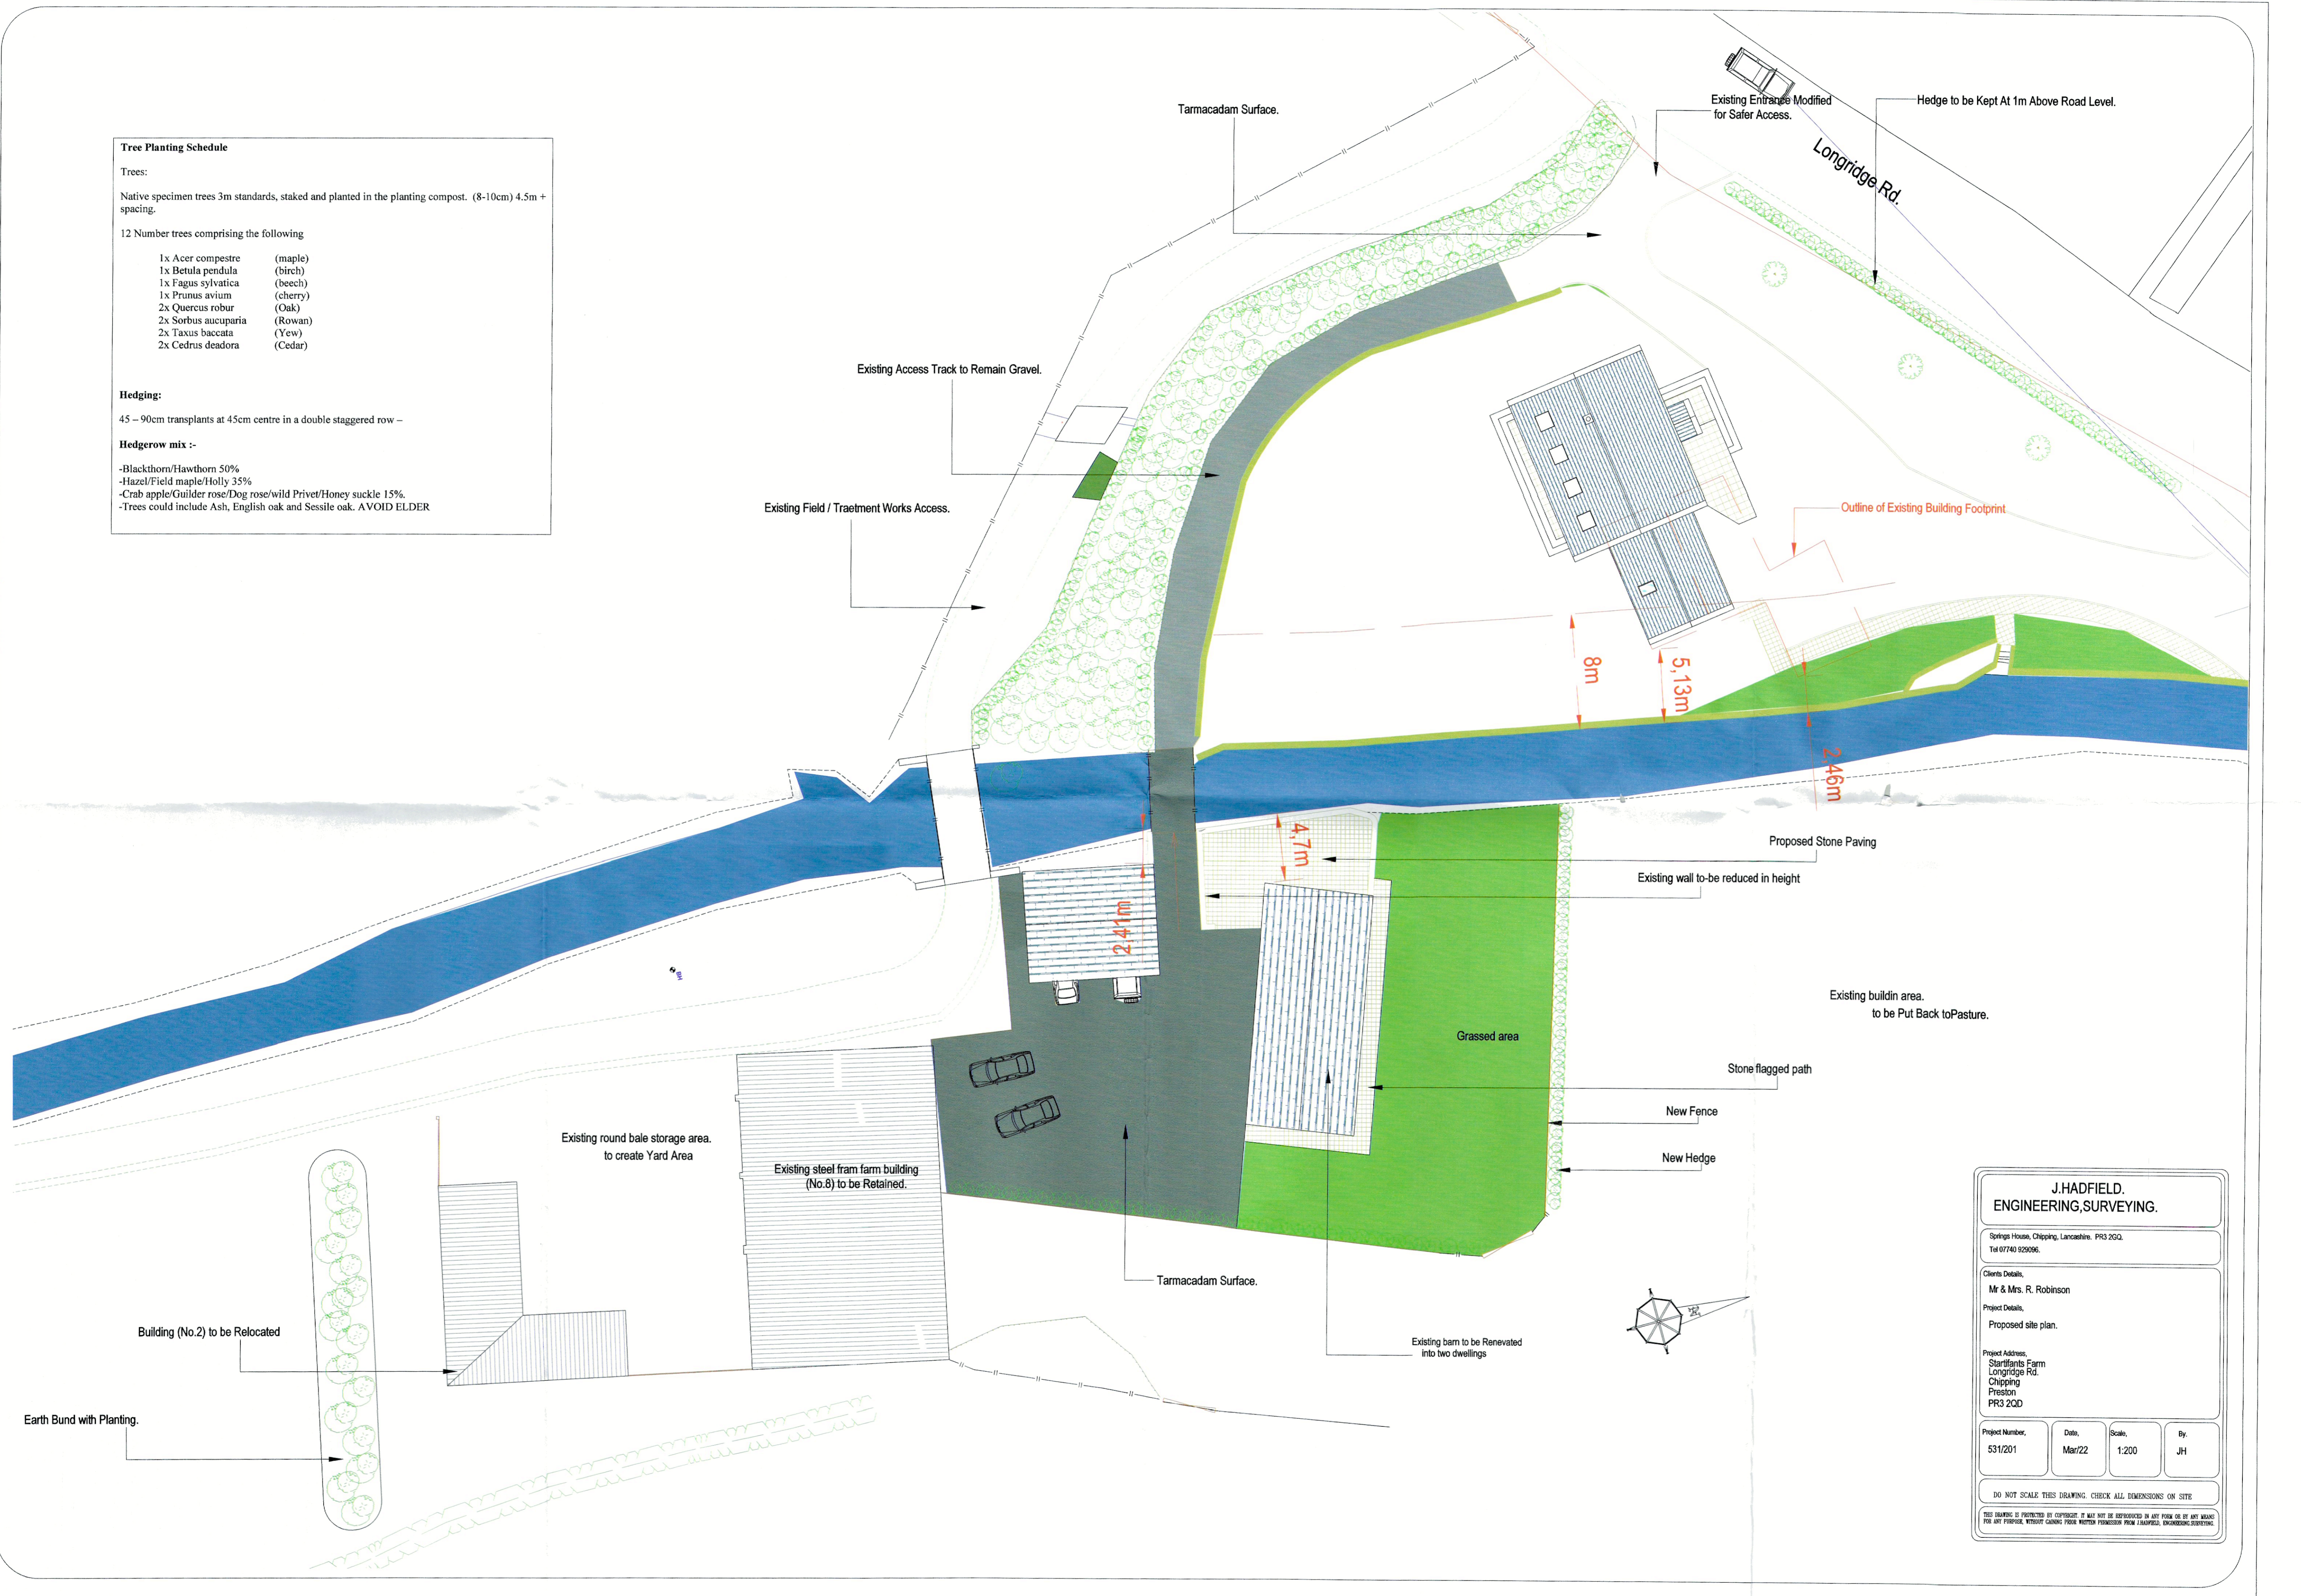

**J.HADFIELD.
ENGINEERING,SURVEYING.**

Springs House, Chipping, Lancashire. PR3 2GQ.
Tel 07740 929096.

Client's Details,
Mr & Mrs. R. Robinson

Project Details,
Proposed site plan.

Project Address,
Starfants Farm
Longridge Rd.
Chipping
Preston
PR3 2QD

Project Number, 531/201	Date, Mar/22	Scale, 1:200	By, JH
----------------------------	-----------------	-----------------	-----------

DO NOT SCALE THIS DRAWING. CHECK ALL DIMENSIONS ON SITE

THIS DRAWING IS UNREGISTERED BY COPYRIGHT. IT MAY NOT BE REPRODUCED OR BY ANY MANNER FOR ANY PURPOSE, WITHOUT WRITTEN PERMISSION FROM J.HADFIELD, ENGINEERING,SURVEYING.