

THE MANOR HOUSE, CLITHEROE




Partition Type A:
2 layers of 12.5mm 'SoundBloc' plasterboard on resilient bars each side of 70mm metal stud. Dense mineral wool insulation fitted between studs.

Partition Type B:
1 layer of 12.5mm plasterboard each side of 70mm metal stud. Dense mineral wool insulation fitted between studs.

Partition Type C:
2 layers of 12.5mm plasterboard each side of 70mm metal stud. Dense mineral wool insulation fitted between studs.

Note: Partitioning products by British Gypsum or similar.

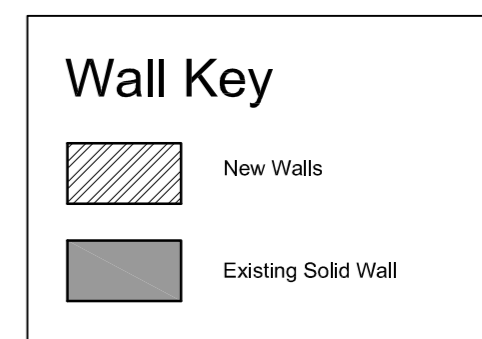

EXISTING FIRST FLOOR LAYOUT 1:50

