



Arboricultural Impact Assessment

in Relation to Proposed Construction of New Driveway Access
(Planning Application No. 3/2023/0015) and Detached Triple Garage
(Planning Application No. 3/2023/0215) at



**Laneside House, Forest Beck Brow,
Wigglesworth, North Yorkshire,
BD23 4SL**

Prepared by:

Bowland 
Tree Consultancy Ltd

May 2023

**ARBORICULTURAL IMPACT ASSESSMENT
LANESIDE HOUSE, FOREST BECK BROW, WIGGLESWORTH**

CONTENTS

1. TREE SURVEY SCHEDULE & BS5837: 2012 TABLE 1
2. TEMPORARY PROTECTIVE FENCING SPECIFICATION
3. TREE CONSTRAINTS PLAN
4. TREE IMPACT PLAN



Unit Two
11 Cannon Street
Preston
Lancashire
PR1 3NR

T: 01772 437150

E: info@bowlandtreeconsultancy.co.uk

Ground Floor
14 Castlegate
Penrith
Cumbria
CA11 7HZ

T: 01768 744450

**ARBORICULTURAL IMPACT ASSESSMENT
LANESIDE HOUSE, FOREST BECK BROW, WIGGLESWORTH**

PROJECT DETAILS

Project No.: BTC2710

Site: Laneside House, Forest Beck Brow, Wigglesworth, BD23 4SL

Client: Kate Mason

Council: Ribble Valley Borough Council

Survey Date: 27 April 2023

Surveyed by: Joseph Lambert BSc(Hons) FdSc MArborA MICFor

Prepared by: Joseph Lambert BSc(Hons) FdSc MArborA MICFor

Checked by: Phill Harris MSc BSc(Hons) HND MArborA CEnv MICFor

Date of Issue: 24 May 2023

Version No: 1

DISCLAIMER

Survey Limitations: Unless otherwise stated all trees are surveyed from ground level using non-invasive techniques. The disclosure of hidden crown and stem defects, in particular where they may be above a reachable height or where trees are ivy clad or in areas of ground vegetation, cannot therefore be expected. All obvious defects, however, are reported. Detailed tree safety appraisals are only carried out under specific written instructions. Comments upon evident tree safety relate to the condition of said tree at the time of the survey only.

Unless otherwise stated all trees should be re-inspected annually in order to appraise their on-going mechanical integrity and physiological condition. It should, however, be recognised that tree condition is subject to change, for example due to the effects of disease, decay, high winds, development works, etc. Changes in land use or site conditions (e.g. development that increases access frequency) and the occurrence of severe weather incidents are also significant considerations with regards tree structural integrity and trees should therefore be re-assessed in the context of such changes and/or incidents and inspected at intervals relative to identified and varying site conditions and associated risks.

Where trees are located wholly or partially on neighbouring private third-party land then said land is not accessed and our inspection is therefore restricted to what can reasonably be seen from within the site. Stem diameters of trees located on such land are estimated. Any subsequent comments and judgments made in respect of such trees are based on these restrictions and are our preliminary opinion only. Recommendations for works to neighbouring third-party trees are only made where a potentially unacceptable risk to persons and/or property has been identified during our survey. Where significant structural defects of third-party trees are identified and associated management works are considered essential to negate any risk of harm and/or damage then we will first attempt to inform the site occupier of the issues and, if not possible, then inform the relevant Council. Where a more detailed assessment is considered necessary then appropriate recommendations are set out in the Tree Survey Schedule.

Where tree stem locations are not included on the plan(s) provided then they are plotted at the time of the survey using, where appropriate and/or practicable, a combination of measurement triangulation and GPS co-ordination. Where this is not possible then locations are estimated. Restrictions in these respects are detailed in the report.

The tree survey and any report information provided is intended as a guide to identify key tree related constraints to site development only. As such, the potential influence of trees upon existing or proposed buildings or other structures resulting from the effects of their roots abstracting water from shrinkable load-bearing soils is not considered herein. The tree survey information in its current form should not therefore be considered sufficient to determine appropriate foundation depths for new buildings. Accordingly, an updated survey, with reference to the current NHBC Standards Chapter 4.2 - Building Near Trees, must therefore be prepared for the specific purpose of informing suitable foundation depths subsequent to planning approval being granted. The advice of a structural engineer must also be sought with regard to appropriate foundation depths for new buildings.

Copyright & Non-Disclosure Notice: The content and layout of this report are subject to copyright owned by Bowland Tree Consultancy Ltd, save to the extent that copyright has been legally assigned to us by another party or is used by Bowland Tree Consultancy Ltd under license. The report remains the property of Bowland Tree Consultancy Ltd until such time as payment in full for the services conducted as per the contract of Bowland Tree Consultancy Ltd's appointment has been compensated. The report may not be copied or used without our prior written agreement for any purpose other than those indicated. Unauthorised reproduction or usage of the report by any person is prohibited.

Third Parties: Any disclosure of this document to a third party is subject to this disclaimer. The report was prepared by Bowland Tree Consultancy Ltd at the instruction of and for use by our client, as named. This report does not in any way constitute advice to any third party who is able to access it by any means. Bowland Tree Consultancy Ltd excludes to the fullest extent lawfully permitted all liability whatsoever for any loss or damage arising from reliance on the contents of this report.

Statutory Tree Protection: It is the client's responsibility to check for the presence of any statutory tree protection measures, such as the site's location within a Conservation Area and/or the presence of any Tree Preservation Orders, directly with the applicable Council's planning department prior to scheduling or carrying out any tree works. In turn, it is also the client's responsibility to check for the need for a felling licence with the Forestry Commission prior to scheduling or carrying out any tree works. Bowland Tree Consultancy Ltd cannot be held responsible for any decisions made by the client to prune or remove trees where any such statutory protection exists.

Liability: This report was prepared for the sole use of 'The Client' and, where applicable, the client's 'Agent', in accordance with the agreement under which the services were instructed. No warranty, express or implied, is made as to the advice in this report or any other service provided by Bowland Tree Consultancy Ltd. This report may not be relied upon by any other party except the client or any third party for whom the report is intended without the prior written permission of Bowland Tree Consultancy Ltd. The content of this report is, at least in part, based upon information provided by secondary data sources and on the assumption that all relevant information has been provided by those parties from whom it has been requested. Information obtained from any third party has not been independently verified by Bowland Tree Consultancy Ltd, unless otherwise stated in the report.

Validity: The findings and recommendations contained within this report are, providing its recommendations are observed and the site conditions are retained as per the date(s) of the survey, valid for a period of twelve months from the last survey date. This period of validity may be reduced should there be any changes in factors affecting both the surrounding environment and/or built structures in relative proximity to the trees. The condition of trees should be re-appraised directly, through a site survey, following major weather events such as storms, changes undertaken to the site's conditions, inclusive of demolition and/or ground works, or the removal of existing site vegetation, including trees.

TREE SURVEY SCHEDULE FOR ARBORICULTURAL IMPACT ASSESSMENT							
Site:	Laneside House, Forest Beck Brow, Wigglesworth, North Yorkshire, BD23 4SL						
Client:	Kate Mason						

Surveyor:	Joseph Lambert Chartered Arboriculturist
Survey Date:	27 April 2023
Job Reference:	BTC2710

Page: 1 of 5

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)
T1	Irish Yew	9	100	N E S W 2 2 2 2	N/A 0	M	G	<ul style="list-style-type: none"> Multiple recent pruning wounds up to 90mm diameter and pruning stubs from raising. Not projected to be impacted by proposed works. 	<ul style="list-style-type: none"> Retain tree in context of proposed development. 	20+	B1	41	3.6
T2	Flowering Dogwood sp.	4	1x120 2x90 (ms)	N E S W 3.5 2 2 3.5	N/A 1.5	SM	G	<ul style="list-style-type: none"> Multi-stemmed ornamental tree. Not projected to be impacted by proposed works. 	<ul style="list-style-type: none"> Retain tree in context of proposed development. 	10+	C1	14	2.1
T3	Common Ash	12.5	170	N E S W 4 3 4 4.5	N/A 3	EM	M/P	<ul style="list-style-type: none"> Out of leaf at time of survey, but canopy evidently significantly colonised by Ash Dieback Disease (ADD). Close to road with resultant potential risk to road users should tree part fail. 	<ul style="list-style-type: none"> Remove tree within next 12 months due to projected decline and roadside location in relation to projected increased risk of failure. 	<10	U	79	5
T4	Lawson Cypress	12.5	550	N E S W 3 3 3 3	1 1	M	G	<ul style="list-style-type: none"> Number of moderately tight branch unions typical of species with typical bark patterns. Not projected to be impacted by proposed works. 	<ul style="list-style-type: none"> Retain tree in context of proposed development. 	20+	B1	137	6.6
T5	Common Ash	19.5	800	N E S W 8.5 6.5 7.5 5	6 7	M	MD	<ul style="list-style-type: none"> Canopy significantly colonised by ADD with significant dieback of upper canopy and tertiary branches. Close to road with resultant potential risk to road users should tree part fail. 	<ul style="list-style-type: none"> Remove tree within next 12 months due to projected decline and roadside location in relation to projected increased risk of failure. 	<10	U	290	9.6
T6	Norway Spruce	14	260	N E S W 2.5 2.5 2.5 1	N/A 4	SM	M	<ul style="list-style-type: none"> Located in dense hedging. Suppressed by larger Ash tree T4. 	<ul style="list-style-type: none"> Remove tree in order to construct access for planning application no. 3/2023/0015. Compensate for removal through replacement tree and hedge planting to either side of proposed new access (see TIP). NB: Replacement tree and hedge planting can be assured through imposition of a suitably worded planning condition attached to a planning approval. 	10+	C1	31	3.12

Headings and Abbreviations:

No.	Allocated sequential reference number - Tree ('T'), Group ('G'), Woodland ('W') or Hedge ('H') reference number - refer to plan and to numbered tags where applicable
Species:	Common name
Height:	In metres, to half nearest metre – where possible approximately 80% are measured using an electronic clinometer and the remainder estimated against the measured trees. In the case of Groups and Woodlands the measurement listed is that of the highest tree
Stem Diam.:	Stem diameter in millimetres, to nearest 10mm - measured and calculated as per Annex C of BS5837:2012. MS = multi-stemmed, TS = twin-stemmed
Branch Spread:	Crown radius measured (or estimated where considered appropriate) from the four cardinal points (north, east, south and west) to give an accurate visual representation of the crown
Branch & Canopy Clearances:	Existing height above ground level, in metres, of first significant branch and direction of growth (e.g. 2.5-N) and of canopy at lowest point – to inform on crown to height ratio, potential for shading, etc.
Life Stage:	Estimated age class - Y = young, SM = semi-mature, EM = early-mature, M = mature, PM = post-mature
PC:	Physiological Condition - a measure of the tree(s)' overall vitality, i.e. D = Dead, MD = Moribund, P = Poor, M = Moderate, G = Good
General Observations and Comments:	Comments relating to the tree(s)' overall condition and any other pertinent factors including structural defects, current and potential direct structural damage, physiological decline, poor form, etc.
Management Recommendations:	Either Preliminary or In Consideration of the Proposal - In the case of Arboricultural Constraints Surveys the recommended management works only take existing site and tree circumstances and conditions into account and not proposed developments. Arboricultural Impact Assessment and Method Statement related Surveys take the proposed development into consideration with recommendations made accordingly. More than one option may be given if considered appropriate
ERC:	Estimated Remaining Contribution - in years as per BS5837:2012 (i.e. <10, 10+, 20+, 40+)
Cat. Grade:	Category Grading - tree retention value listed as U, A, B or C - in accordance with BS5837:2012 Table 1
RPA m²:	Root Protection Area in m² - calculated area around the tree that must be appropriately protected throughout the development process in order avoid root damage
RPA Radius (m):	Root Protection Area Radius - in metres measured from the centre of the stem to the line of tree protection
# (Estimated Dimensions):	Where trees are located off-site, or are inaccessible for any other reason, and accurate measurements or other information cannot be taken then the information provided is estimated and is duly suffixed with a "#" symbol

TREE SURVEY SCHEDULE FOR ARBORICULTURAL IMPACT ASSESSMENT							
Site: Laneside House, Forest Beck Brow, Wigglesworth, North Yorkshire, BD23 4SL							
Client: Kate Mason							

Surveyor:	Joseph Lambert Chartered Arboriculturist
Survey Date:	27 April 2023
Job Reference:	BTC2710

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)	
T7	Common Ash	6	750	N E S W	0 0 0 0	N/A 0	PM	D	<ul style="list-style-type: none">▪ Standing dead and part hollowed stem in lawn area with climbing Rose.▪ Not projected to be impacted by proposed works.	<ul style="list-style-type: none">▪ Retain tree in context of proposed development.	<10	U	N/A	N/A
T8	Small-Leafed Lime	17	800#	N E S W	7 7 7 7	2.5 2.5	M	M	<ul style="list-style-type: none">▪ Located in hedge behind stock fence part impeding basal inspection.▪ Light ivy cover.▪ Moderate deadwood up to approximately 100mm diameter including one 90mm diameter dead branch hung up over road at approximately 6m height.▪ Canopy showing a moderate reduction in vitality.▪ Not projected to be impacted by proposed works.	<ul style="list-style-type: none">▪ Remove hung up branch and deadwood >50mm diameter directly over road.▪ Monitor canopy vitality as component of cyclical inspections.	20+	B1	290	9.6
T9	Common Oak	15.5	630#	N E S W	6 6 6 3.5	4 2	M	G	<ul style="list-style-type: none">▪ Located in hedge and stock fence, which partially impeded basal inspection.▪ Slight suppression on west side by tree T8.▪ Not projected to be impacted by proposed works.	<ul style="list-style-type: none">▪ Retain tree in context of proposed development.	10+	B1	180	7.56
T10	Common Ash	13	380#	N E S W	3 2 1 2	N/A 3	EM	D	<ul style="list-style-type: none">▪ Dead Ivy clad stem adjacent to road with evident decay under buttress area.▪ Not accessed to inspect in detail.	<ul style="list-style-type: none">▪ Remove tree as evidently dead and within falling distance of road with subsequent projected increased risk of failure.	<10	U	N/A	N/A
T11	Small-Leafed Lime	16	780#	N E S W	7.5 7.5 7.5 7.5	N/A 2	M	G	<ul style="list-style-type: none">▪ Moderate ivy and moderately dense basal growth and hedge impeded basal inspection.▪ Not viewed in detail due to distance from proposed works, but recorded for record.▪ Not projected to be impacted by proposed works.	<ul style="list-style-type: none">▪ Retain tree in context of proposed development.	20+	B1	275	9.36
T12	Lawson Cypress	8	340	N E S W	1 2 2.5 2	N/A 0	SM	G	<ul style="list-style-type: none">▪ Multiple branches arise from approximately 1m height.▪ Highly suppressed by larger tree T13 above.	<ul style="list-style-type: none">▪ Remove tree in order to construct access for planning application no. 3/2023/0015.▪ Compensate for removal through replacement tree and hedge planting either side of proposed new access (see TIP). NB: Replacement tree and hedge planting can be assured through imposition of a suitably worded planning condition attached to a planning approval.	10+	C1	52	4.08

TREE SURVEY SCHEDULE FOR ARBORICULTURAL IMPACT ASSESSMENT							
Site: Laneside House, Forest Beck Brow, Wigglesworth, North Yorkshire, BD23 4SL							
Client: Kate Mason							

Surveyor:	Joseph Lambert Chartered Arboriculturist
Survey Date:	27 April 2023
Job Reference:	BTC2710

Page: 3 of 5

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)	
T13	Common Ash	19.5	950	N E S W	6 5 6.5 6	3-N 3	M	P	<ul style="list-style-type: none">▪ Dense ivy, loose stones and vegetation impeded basal inspection.▪ Moderately significant stem hollowing when sounded with nylon mallet and historic cavity opening on north side at approximately 1m height of 100mm diameter.▪ Dense ivy further impeded inspection of main stem and primary branches.▪ Canopy out of leaf but evidently heavily colonised by ADD.	<ul style="list-style-type: none">▪ Remove tree within next 12 months due to projected decline and location adjacent to high voltage overhead powerlines and property in relation to projected increased risk of failure.	<10	U	408	11.4
T14	Common Oak	16.5	960	N E S W	8.5 4.5 7.5 8	2.5-SE 2	M	M/G	<ul style="list-style-type: none">▪ Located in paved area with stones around buttress base.▪ Stem approximately 3m from property corner.▪ Evidently previously suppressed by adjacent previously removed mature Ash to north-east.▪ Canopy in close proximity to building roof and walls.▪ Not projected to be impacted by proposed works.	<ul style="list-style-type: none">▪ Retain tree in context of proposed development.	20+	B1	417	11.52
T15	Goat Willow	2.5	140	N E S W	1 1 1 1	N/A 1	EM	M	<ul style="list-style-type: none">▪ Recently pruned to current height.▪ Not projected to be impacted by proposed works.	<ul style="list-style-type: none">▪ Retain tree in context of proposed development.	10+	C1	53	4.12
G1	2no. Lawson Cypress	≤ 4.5	≤ 1x170 1x140 (ts)	N E S W	≤ 3 ≤ 1 ≤ 1 ≤ 1	N/A ≥ 0.5	SM	M	<ul style="list-style-type: none">▪ Closely spaced pair in wider group.▪ Evidently pruned to approximately current height to maintain clearance from high voltage overhead power lines.	<ul style="list-style-type: none">▪ Remove group in order to construct access for planning application no. 3/2023/0015.▪ Compensate for removal through replacement tree and hedge planting either side of proposed new access (see TIP). NB: Replacement tree and hedge planting can be assured through imposition of a suitably worded planning condition attached to a planning approval.	10+	C1	≤ 22	≤ 2.64

TREE SURVEY SCHEDULE FOR ARBORICULTURAL IMPACT ASSESSMENT							
Site: Laneside House, Forest Beck Brow, Wigglesworth, North Yorkshire, BD23 4SL							
Client: Kate Mason							

Surveyor:	Joseph Lambert Chartered Arboriculturist
Survey Date:	27 April 2023
Job Reference:	BTC2710

Page: 4 of 5

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)
G2	Common Ash, Common Hawthorn, Common Beech	≤ 9	≤ 200	N ≤ 5 E ≤ 3 S ≤ 4 W ≤ 3	N/A ≥ 0	SM	M-G	<ul style="list-style-type: none"> Mixed evidently unmanaged closely spaced broadly linear group. Becoming Hawthorn and Beech to east. Group width varies and generally narrower below mature trees. One semi-mature Ash approximately 200mm stem diameter marked G2a out of leaf but evidently colonised by ADD and overhanging road. 	<ul style="list-style-type: none"> Remove Ash tree (G2a) due projected continued decline as a result of colonisation by ADD. Remove approximately 10m section of group in order to construct access for planning application no. 3/2023/0015. Retain remaining group in context of proposed development. Ensure protection of group where adjacent to proposed access through use of temporary protective fencing in accordance with appended specification. Compensate for partial removal through replacement tree and hedge planting either side of proposed new access (see TIP). NB: Replacement tree and hedge planting can be assured through imposition of a suitably worded planning condition attached to a planning approval. 	10+	C1	≤ 19	≤ 2.49
G3	Hazel, Hawthorn, Holly etc.	≤ 6	≤ 100	N ≤ 3 E ≤ 3 S ≤ 3 W ≤ 3	N/A ≥ 0	EM	M-G	<ul style="list-style-type: none"> Closely spaced linear group. Managed in height to south-western end below high voltage overhead power lines. 	<ul style="list-style-type: none"> Remove approximately 6m section of group in order to construct access for planning application no. 3/2023/0015. Retain remaining group in context of proposed development. Ensure protection of group where adjacent to proposed access and proposed garage through use of temporary protective fencing in accordance with appended specification. Compensate for partial removal through replacement tree and hedge planting either side of proposed new access (see TIP). NB: Replacement tree and hedge planting can be assured through imposition of a suitably worded planning condition attached to a planning approval. 	10+	C1	≤ 17	≤ 2.35
G4	approx. 9no. Birch, 1no. Hornbeam, 1no. Rowan	≤ 15	≤ 260	N ≤ 4.5 E ≤ 4.5 S ≤ 3 W ≤ 3	N/A ≥ 1.5	Y-EM	G	<ul style="list-style-type: none"> Moderately closely spaced group located in garden area immediately south-west of compacted stone hard surfacing. 	<ul style="list-style-type: none"> Retain group in context of proposed development. Prune group to attain approximately 3.5m clearance over existing hardstanding to north-east. Ensure protection of group through retention of existing hard standing and wooden post and rail garden boundary fencing to north-east of group (see TIP). 	20+	B1	≤ 31	≤ 3.12

TREE SURVEY SCHEDULE FOR ARBORICULTURAL IMPACT ASSESSMENT							
Site: Laneside House, Forest Beck Brow, Wigglesworth, North Yorkshire, BD23 4SL							
Client: Kate Mason							

Surveyor:	Joseph Lambert Chartered Arboriculturist
Survey Date:	27 April 2023
Job Reference:	BTC2710

Page: 5 of 5

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m²)	RPA Radius (m)
G5	approx. 3no. Hawthorn, 1no. Holly, 1no. Hazel	≤ 8	≤ 1x120 2x90 (ms)	N ≤ 3 E ≤ 3 S ≤ 3 W ≤ 3	N/A ≥ 0	EM	M-G	<ul style="list-style-type: none"> Moderately closely spaced group located in garden border with low Hawthorn shrubs to base. Not projected to be impacted by proposed works. 	<ul style="list-style-type: none"> Retain group in context of proposed development. 	20+	C1	≤ 14	≤ 2.1
H1	Elder, Hawthorn, Privet	≈ 2.5	N/A	≈ 1 wide	N/A	SM	M	<ul style="list-style-type: none"> Length of hedge. Evidently recently reduced to return to current managed size. Not projected to be impacted by proposed works. 	<ul style="list-style-type: none"> Retain hedge in context of proposed development. 	10+	C1	N/A	≈ 0.5

BS5837:2012 Table 1 – Cascade Chart for Tree Quality Assessment

Category and definition	Criteria (including subcategories where appropriate)			Identification on plan
Trees unsuitable for retention (see Note)				
Category U Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years	<ul style="list-style-type: none">Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning)Trees that are dead or are showing signs of significant, immediate, and irreversible overall declineTrees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality <i>Note: Category U trees can have existing or potential conservation value which it might be desirable to preserve; see BS5837:2012 paragraph 4.5.7.</i>			Red
	1. Mainly arboricultural qualities	2. Mainly landscape qualities	3. Mainly cultural values, including conservation	
Trees to be considered for retention				
Category A Trees of high quality with an estimated remaining life expectancy of at least 40 years	Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant and/or principal trees within an avenue)	Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features	Trees, groups or woodlands of significant conservation, historical, commemorative or other value (e.g. veteran trees or wood-pasture)	Green
Category B Those of moderate quality and value: those in such a condition as to make a significant contribution. A minimum of 20 years is suggested.	Trees that might be included in the high category, but are downgraded because of impaired condition. Examples include the presence of remediable defects including unsympathetic past management and minor storm damage	Trees present in numbers, usually as groups or woodlands, so they form distinct landscape features which attract a higher collective rating than they might as individuals. But which are not, individually, essential components of formal or semi-formal arboricultural features. For example, trees of moderate quality within an avenue that includes better, A category specimens. Or trees which are internal to the site, therefore individually having little visual impact on the wider locality	Trees with clearly identifiable conservation or other cultural benefits	Blue
Category C Those trees of low quality and value: currently in adequate condition to remain until new planting could be established - a minimum of 10 years is suggested - or young trees with a stem diameter below 150 mm	Trees not qualifying in higher categories	Trees present in groups or woodlands, but without this conferring on them significantly greater landscape value, and/or trees offering low or only temporary screening benefit	Trees with very limited conservation or other cultural benefits	Grey
	Note – Whilst C category trees will usually not be retained where they would impose a significant constraint on development, young trees with a stem diameter of less than 150mm should be considered for relocation			

- TEMPORARY PROTECTIVE FENCING & GROUND PROTECTION SPECIFICATION -

Construction Exclusion Zones (CEZs), shall be enclosed by **Temporary Protective Fencing** and/or, where necessary, **Temporary Ground Protection Measures**. The fencing/ground protection Type(s), locations, and extents shall be agreed, in writing, with the Local Planning Authority (LPA). In turn, the **Temporary Protective Fencing** and/or **Temporary Ground Protection Measures** shall:

1. be constructed as in accordance with the Type 1, Type 2 or Type 3 'Temporary Protective Fencing Construction' sections and, where applicable the 'Temporary Ground Protection Measures' section, as detailed herein and agreed, in advance with the LPA;
2. be retained in place throughout the development process until completion of the project, and only removed following receipt of written permission from the LPA;
3. be sited in the area(s) defined by the Root Protection Areas on the associated Tree Impact Plan, or as the CEZs on the Tree Protection Plan;
4. be erected prior to any construction, demolition or excavation works and remain in place for the duration of the project;
5. preclude any delivery of site accommodation and/or materials and/or plant machinery;
6. preclude all construction related activity, with the sole exception of specified arboricultural works and any other works to be carried out under supervision that have been agreed by all parties;
7. preclude the storage of all development related materials and substances including fuels, oils, additives, cement and/or any other deleterious substance; and
8. be affixed with a 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1, below), at every 10.0 metre length of protective fencing.
9. Important: Any incursion into CEZs must be by prior arrangement, following consultation with the LPA.

Figure 1: CEZ Warning Sign

**- TREE PROTECTION AREA –
KEEP OUT!**

(TOWN & COUNTRY PLANNING ACT 1990)

**THE TREES ENCLOSED BY THIS FENCE ARE PROTECTED BY PLANNING
CONDITIONS AND/OR SUBJECTS OF A 'TREE PRESERVATION ORDER',
THE CONTRAVENTION OF WHICH MAY LEAD TO CRIMINAL
PROSECUTION**

THE FOLLOWING MUST BE OBSERVED BY ALL PERSONNEL:


- THE PROTECTIVE FENCING MUST NOT BE MOVED
- NO PERSON SHALL ENTER THE CONSTRUCTION EXCLUSION ZONE
- NO MACHINE, PLANT OR VEHICLES SHALL ENTER THE EXCLUSION ZONE
- NO MATERIALS SHALL BE STORED IN THE EXCLUSION ZONE
- NO SPOIL SHALL BE DEPOSITED IN THE EXCLUSION ZONE
- NO EXCAVATION SHALL OCCUR IN THE EXCLUSION ZONE
- NO FIRES SHALL BE LIT IN THE EXCLUSION ZONE

**ANY INCURSION INTO THE EXCLUSION ZONE MUST BE WITH THE
WRITTEN PERMISSION OF THE LOCAL PLANNING AUTHORITY**

Type 1 (i.e. 'Default') Temporary Protective Fencing Construction (see Figure 2, below)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall butt together and be securely fixed to a scaffold framework, as per points 3 to 5 of Figure 2, overleaf.
3. The scaffold framework shall comprise of upright poles of at least 3.0 metres in length driven no less than 0.6 metres into the ground at maximum 3.0 metre centres with horizontal and diagonal poles fixed to the uprights, as per points 4 to 5.
4. The two horizontal rail poles shall be attached to the uprights at heights of 0.6 and 1.8 metres with 3 no. clamps to each joint.
5. The diagonal scaffold pole struts be clamped to the top rail of the scaffold framework at a 45° angle and extend back into the CEZ and clamped to a 0.7 metre length of scaffold tube that shall be driven no less than 0.5m into the ground.
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 2: BS5837:2012 Default specification for protective barrier

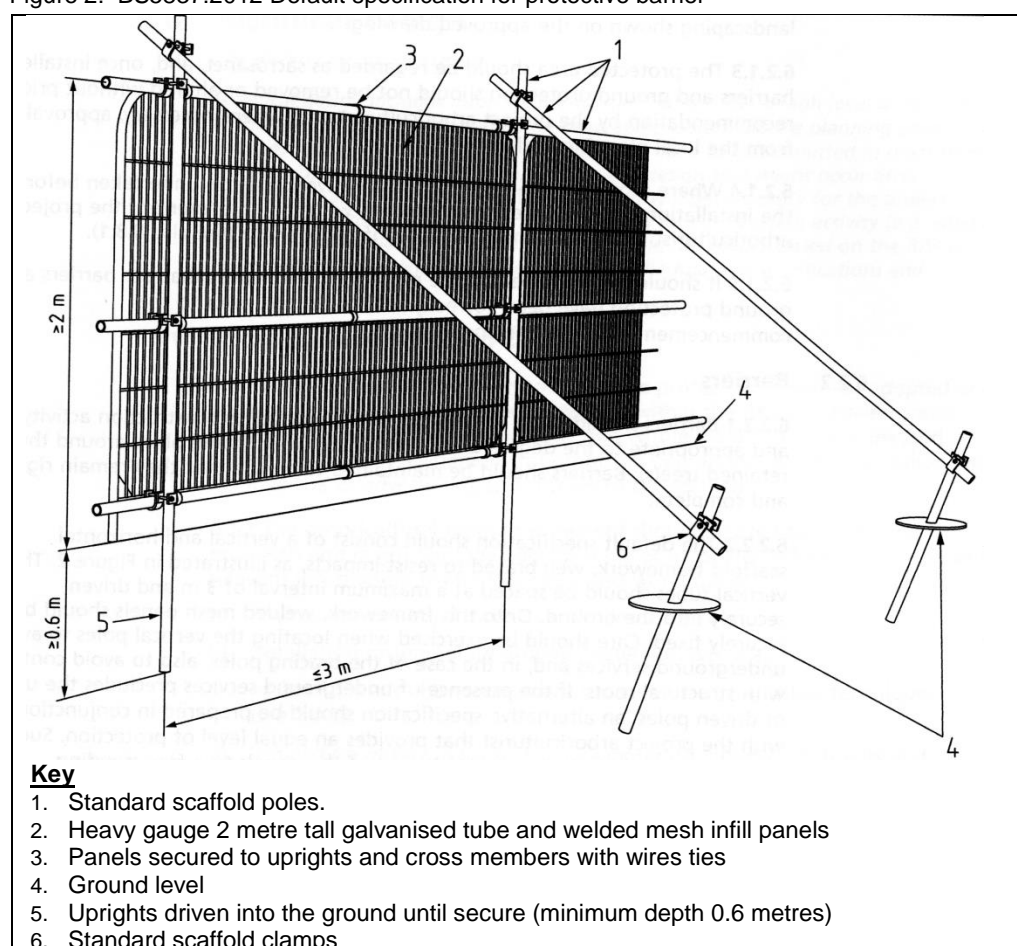

Type 2 Temporary Protective Fencing Construction (see Figure 3(a), below)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall stand on rubber or concrete feet.
3. The panels shall butt together, and be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence.
4. The distance between the fence couplers shall be at least 1.0 metre, and shall be uniform throughout the fence.
5. The panels shall be supported on the inner side by stabiliser struts, which shall be clamped to the scaffold framework at a 45° angle and extend back into the CEZ and shall be attached to a base plate, which shall be secured to the ground with pins (Figure 3a).
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 3(a): Type 2 Fencing (BS5837:2012 above-ground strut stabilising system with ground pins)

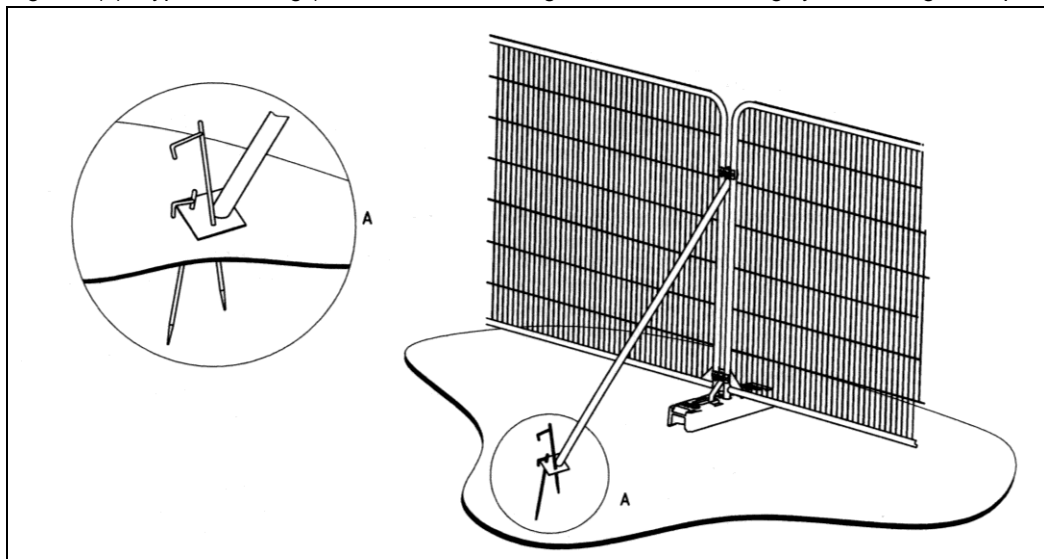

Type 3 Temporary Protective Fencing Construction (see Figure 3(b), overleaf)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall stand on rubber or concrete feet.
3. The panels shall butt together, and be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence.
4. The distance between the fence couplers shall be at least 1.0 metre, and shall be uniform throughout the fence.
5. The panels shall be supported on the inner side by stabiliser struts, which shall be clamped to the scaffold framework at a 45° angle and extend back into the CEZ and shall be attached to a block tray base (Figure 3b).
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 3(b): Type 3 Fencing (BS5837:2012 above-ground stabilising system with strut on block tray)

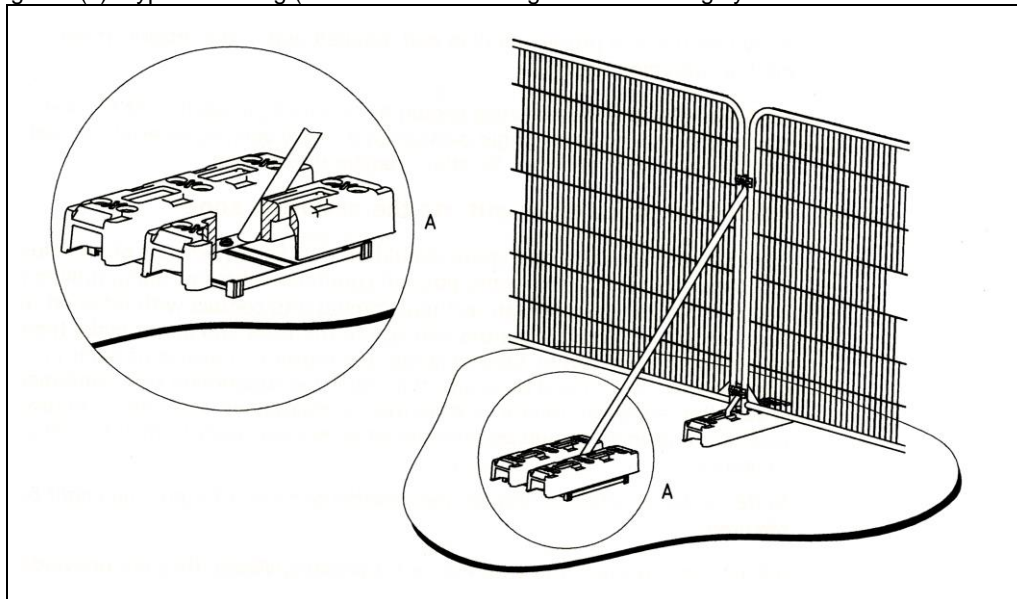


Temporary Ground Protection

1. Any necessary Temporary Ground Protection areas shall conform to Figure 4, below, unless otherwise agreed with the LPA.
2. The Ground Protection Area shall be left undisturbed and covered by a semi-permeable geotextile membrane which shall, in turn, be covered by a compressible layer consisting of a material such as woodchip.
3. Side-butting scaffold boards shall then be fitted to cover the Ground Protection Area.
4. On completion of installation, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Ground Protection.
5. The Temporary Ground Protection shall remain in place until completion of the project and only removed following receipt of written permission from the LPA.

Figure 4: Temporary Ground Protection – Recommended Construction

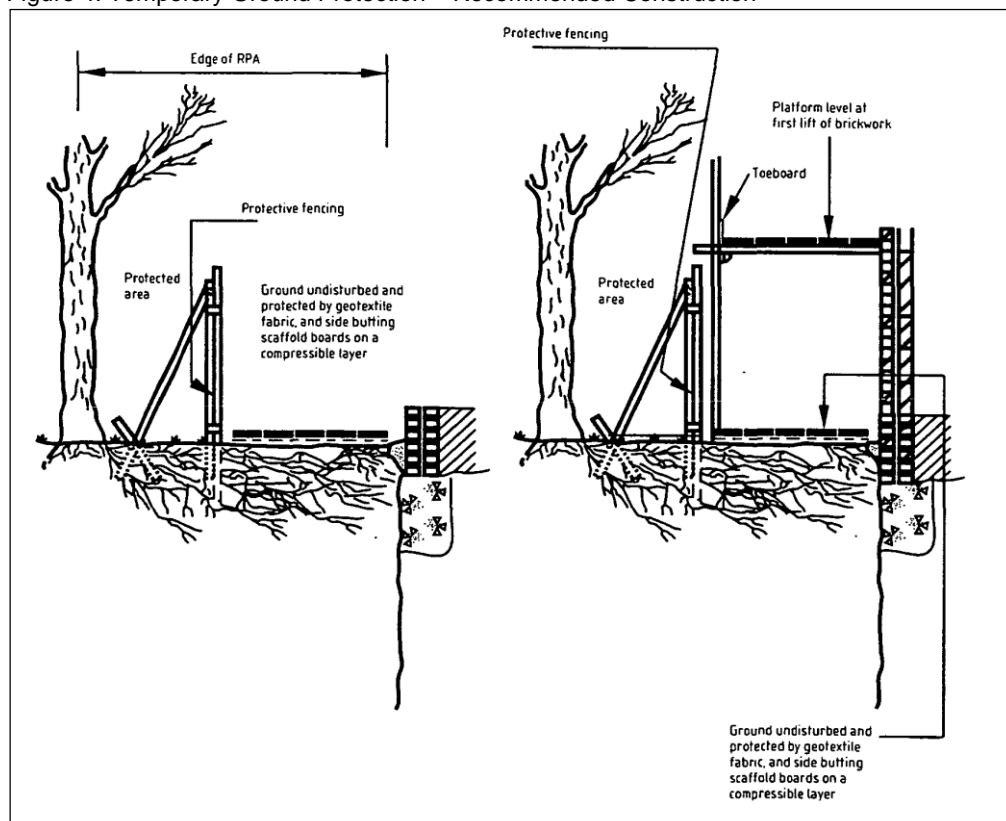

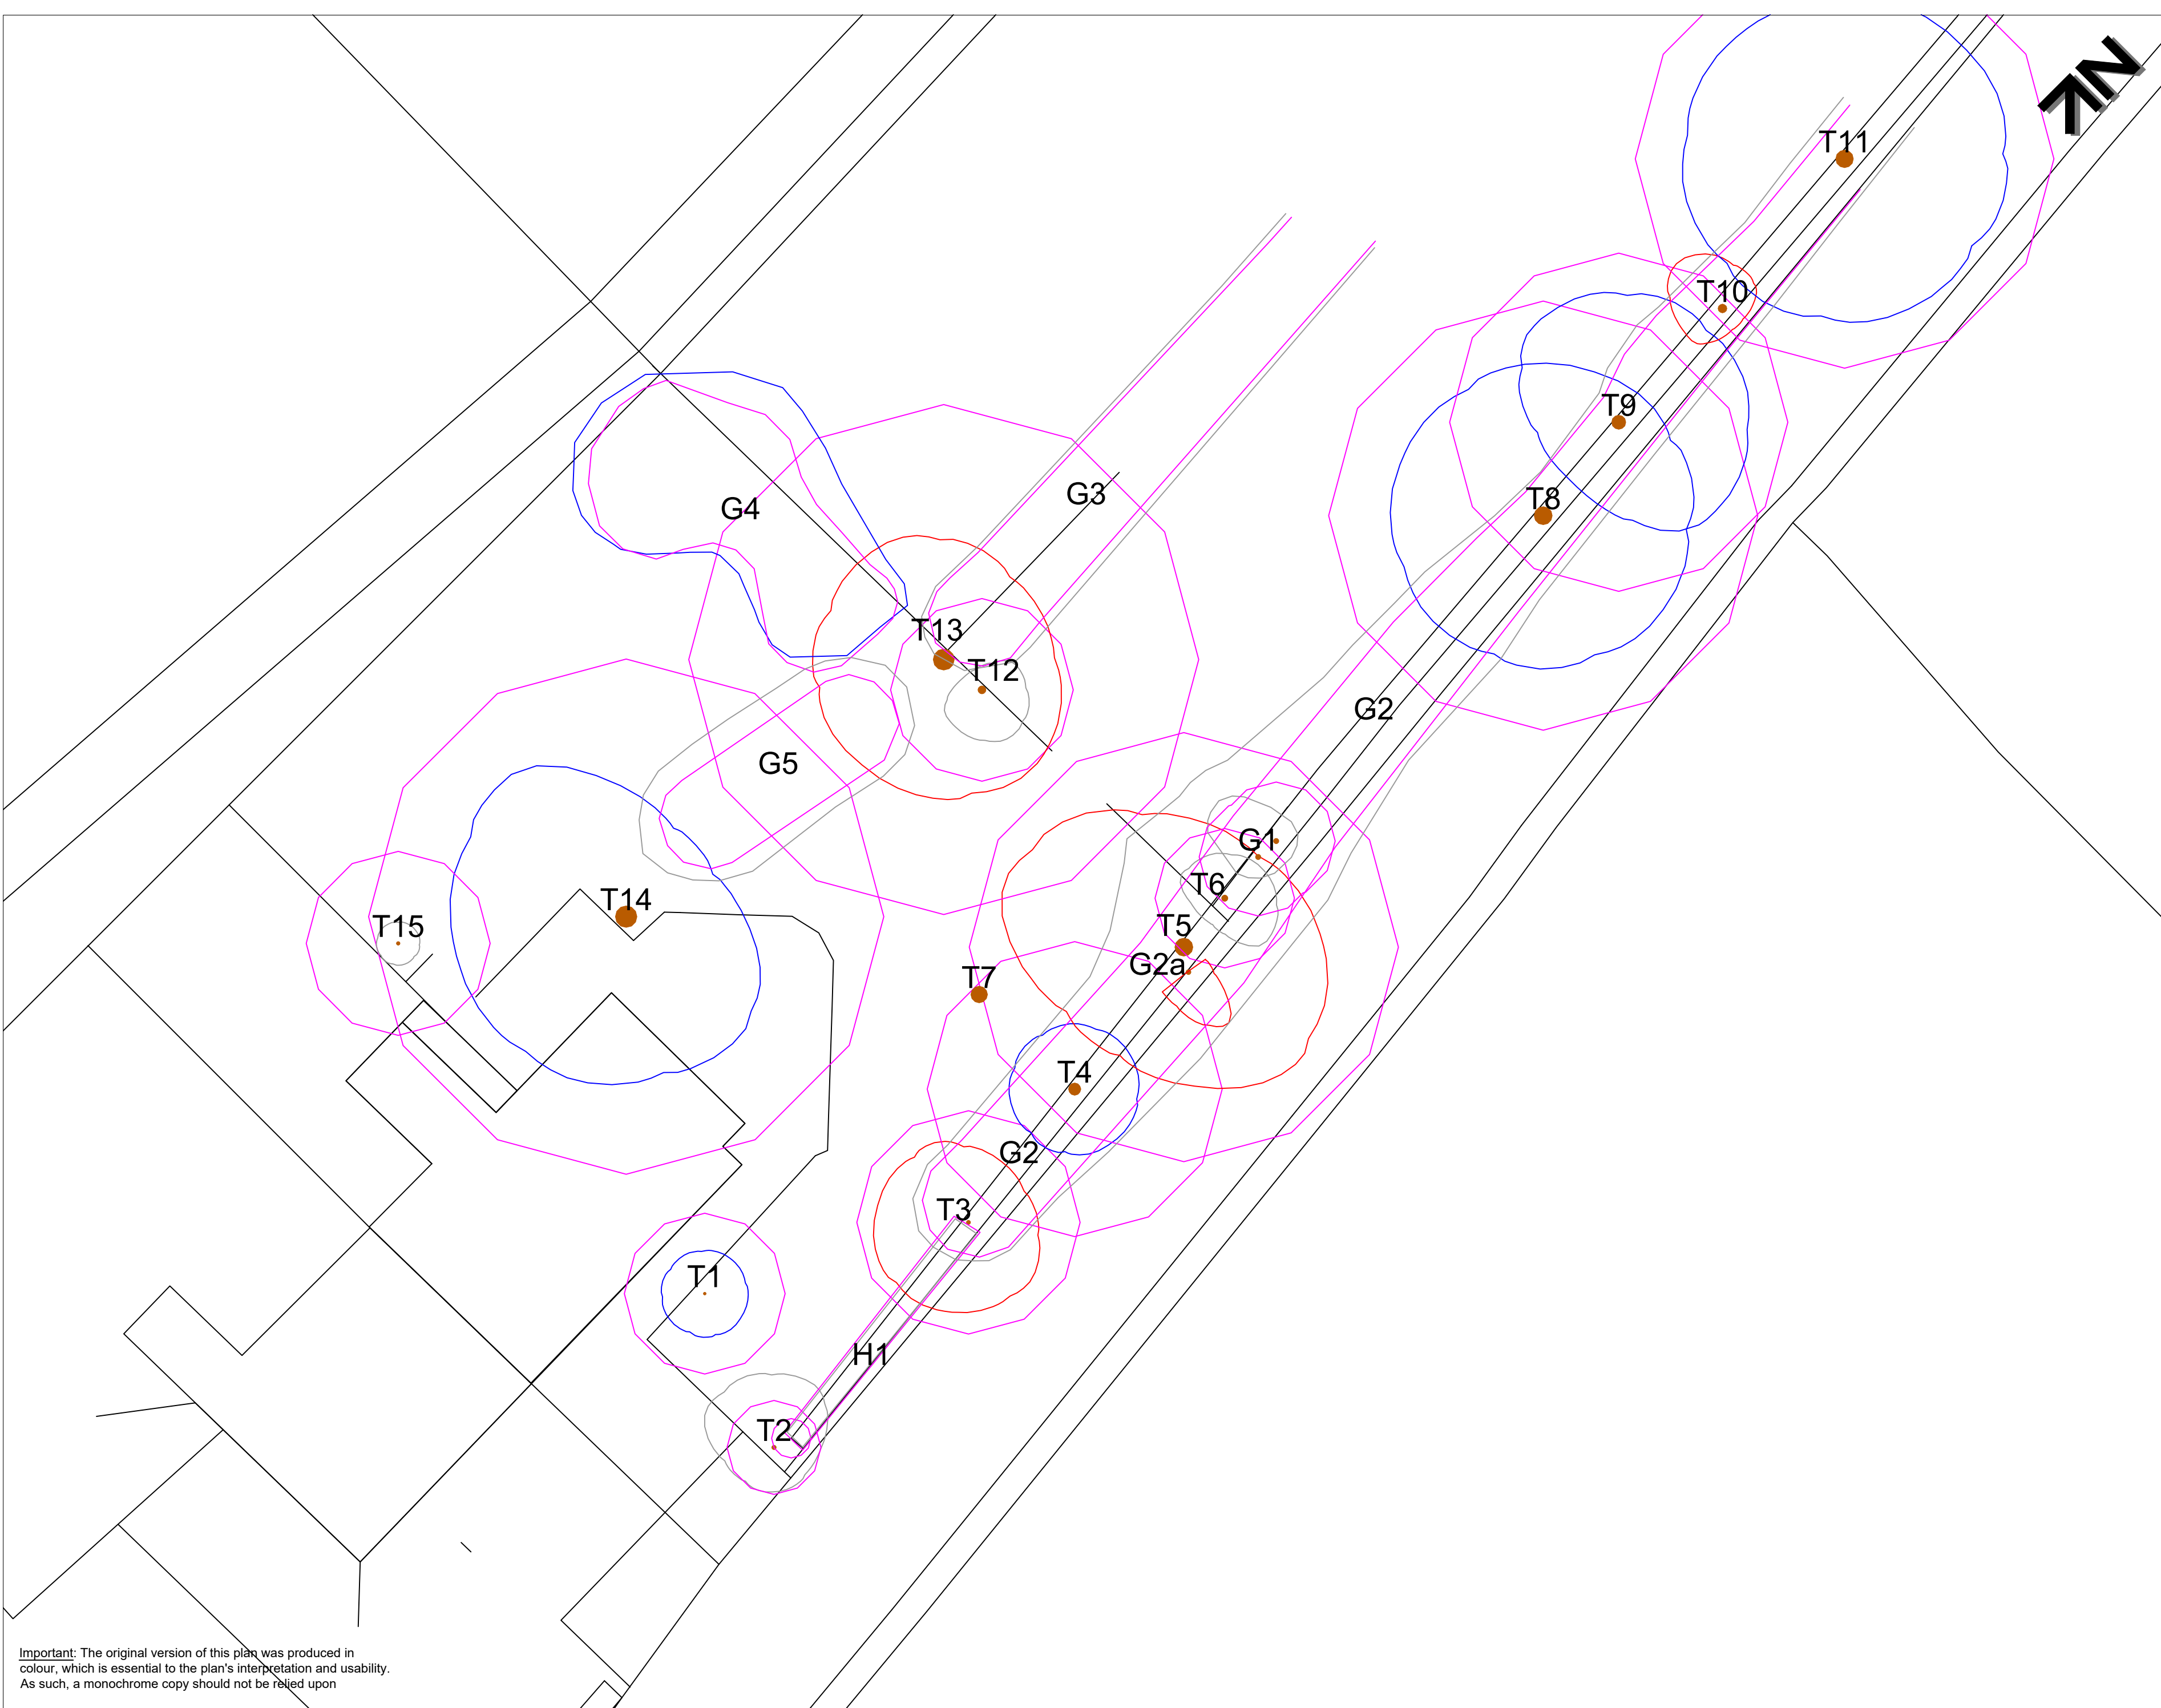




Important: The original version of this plan was produced in colour, which is essential to the plan's interpretation and usability. As such, a monochrome copy should not be relied upon


KEY

T = Individual Tree
G = Group of Trees
H = Hedge

Please refer to associated Tree Survey Schedule and appendices for specific details in respect of items below:


Tree Categorisations:

- Those to be Considered for Retention:
-  Category 'A' Tree/Group/Hedge
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years
 -  Category 'B' Tree/Group/Hedge
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 20 Years
 -  Category 'C' Tree/Group/Hedge
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years, or Young Trees

- Those Considered Unsuitable for Retention:
-  Category 'U' Tree/Group/Hedge
Those in Such a Condition that they Cannot Realistically be Retained as Living Trees in the Context of the Current Land Use for Longer Than 10 Years

Note: The stem location of trees and stem locations and extents of the groups of trees and hedges were not plotted on the ordnance survey based site plan provided, and their locations were subsequently plotted by the arboricultural surveyor using GPS siting and estimation at the time of the survey. As such, the plotted location of the trees and indicated extents of groups and hedges cannot therefore be considered to be wholly accurate

Root Protection Areas (RPAs):

-  RPAs
Area(s) of Ground Around Trees that Should be Protected Throughout Development Works with Protective Fencing to form a Construction Exclusion Zone - see Temporary Protective Fencing Specification

Project:
LANESIDE HOUSE
FOREST BECK BROW
WIGGLESWORTH
NORTH YORKSHIRE
BD23 4SL


Client:
KATE MASON

Title:
TREE CONSTRAINTS PLAN
in Relation to Proposed Construction of New Driveway Access
(Planning Application No. 3/2023/0015) and Detached Triple
Garage (Planning Application No. 3/2023/0215) at

Scale: 1:200@A2
Date: May 2023
Drawn by: JL
Checked by: RG

Bowland
Tree Consultancy Ltd


e: info@bowlandtreeconsultancy.co.uk
t: 01772 437150

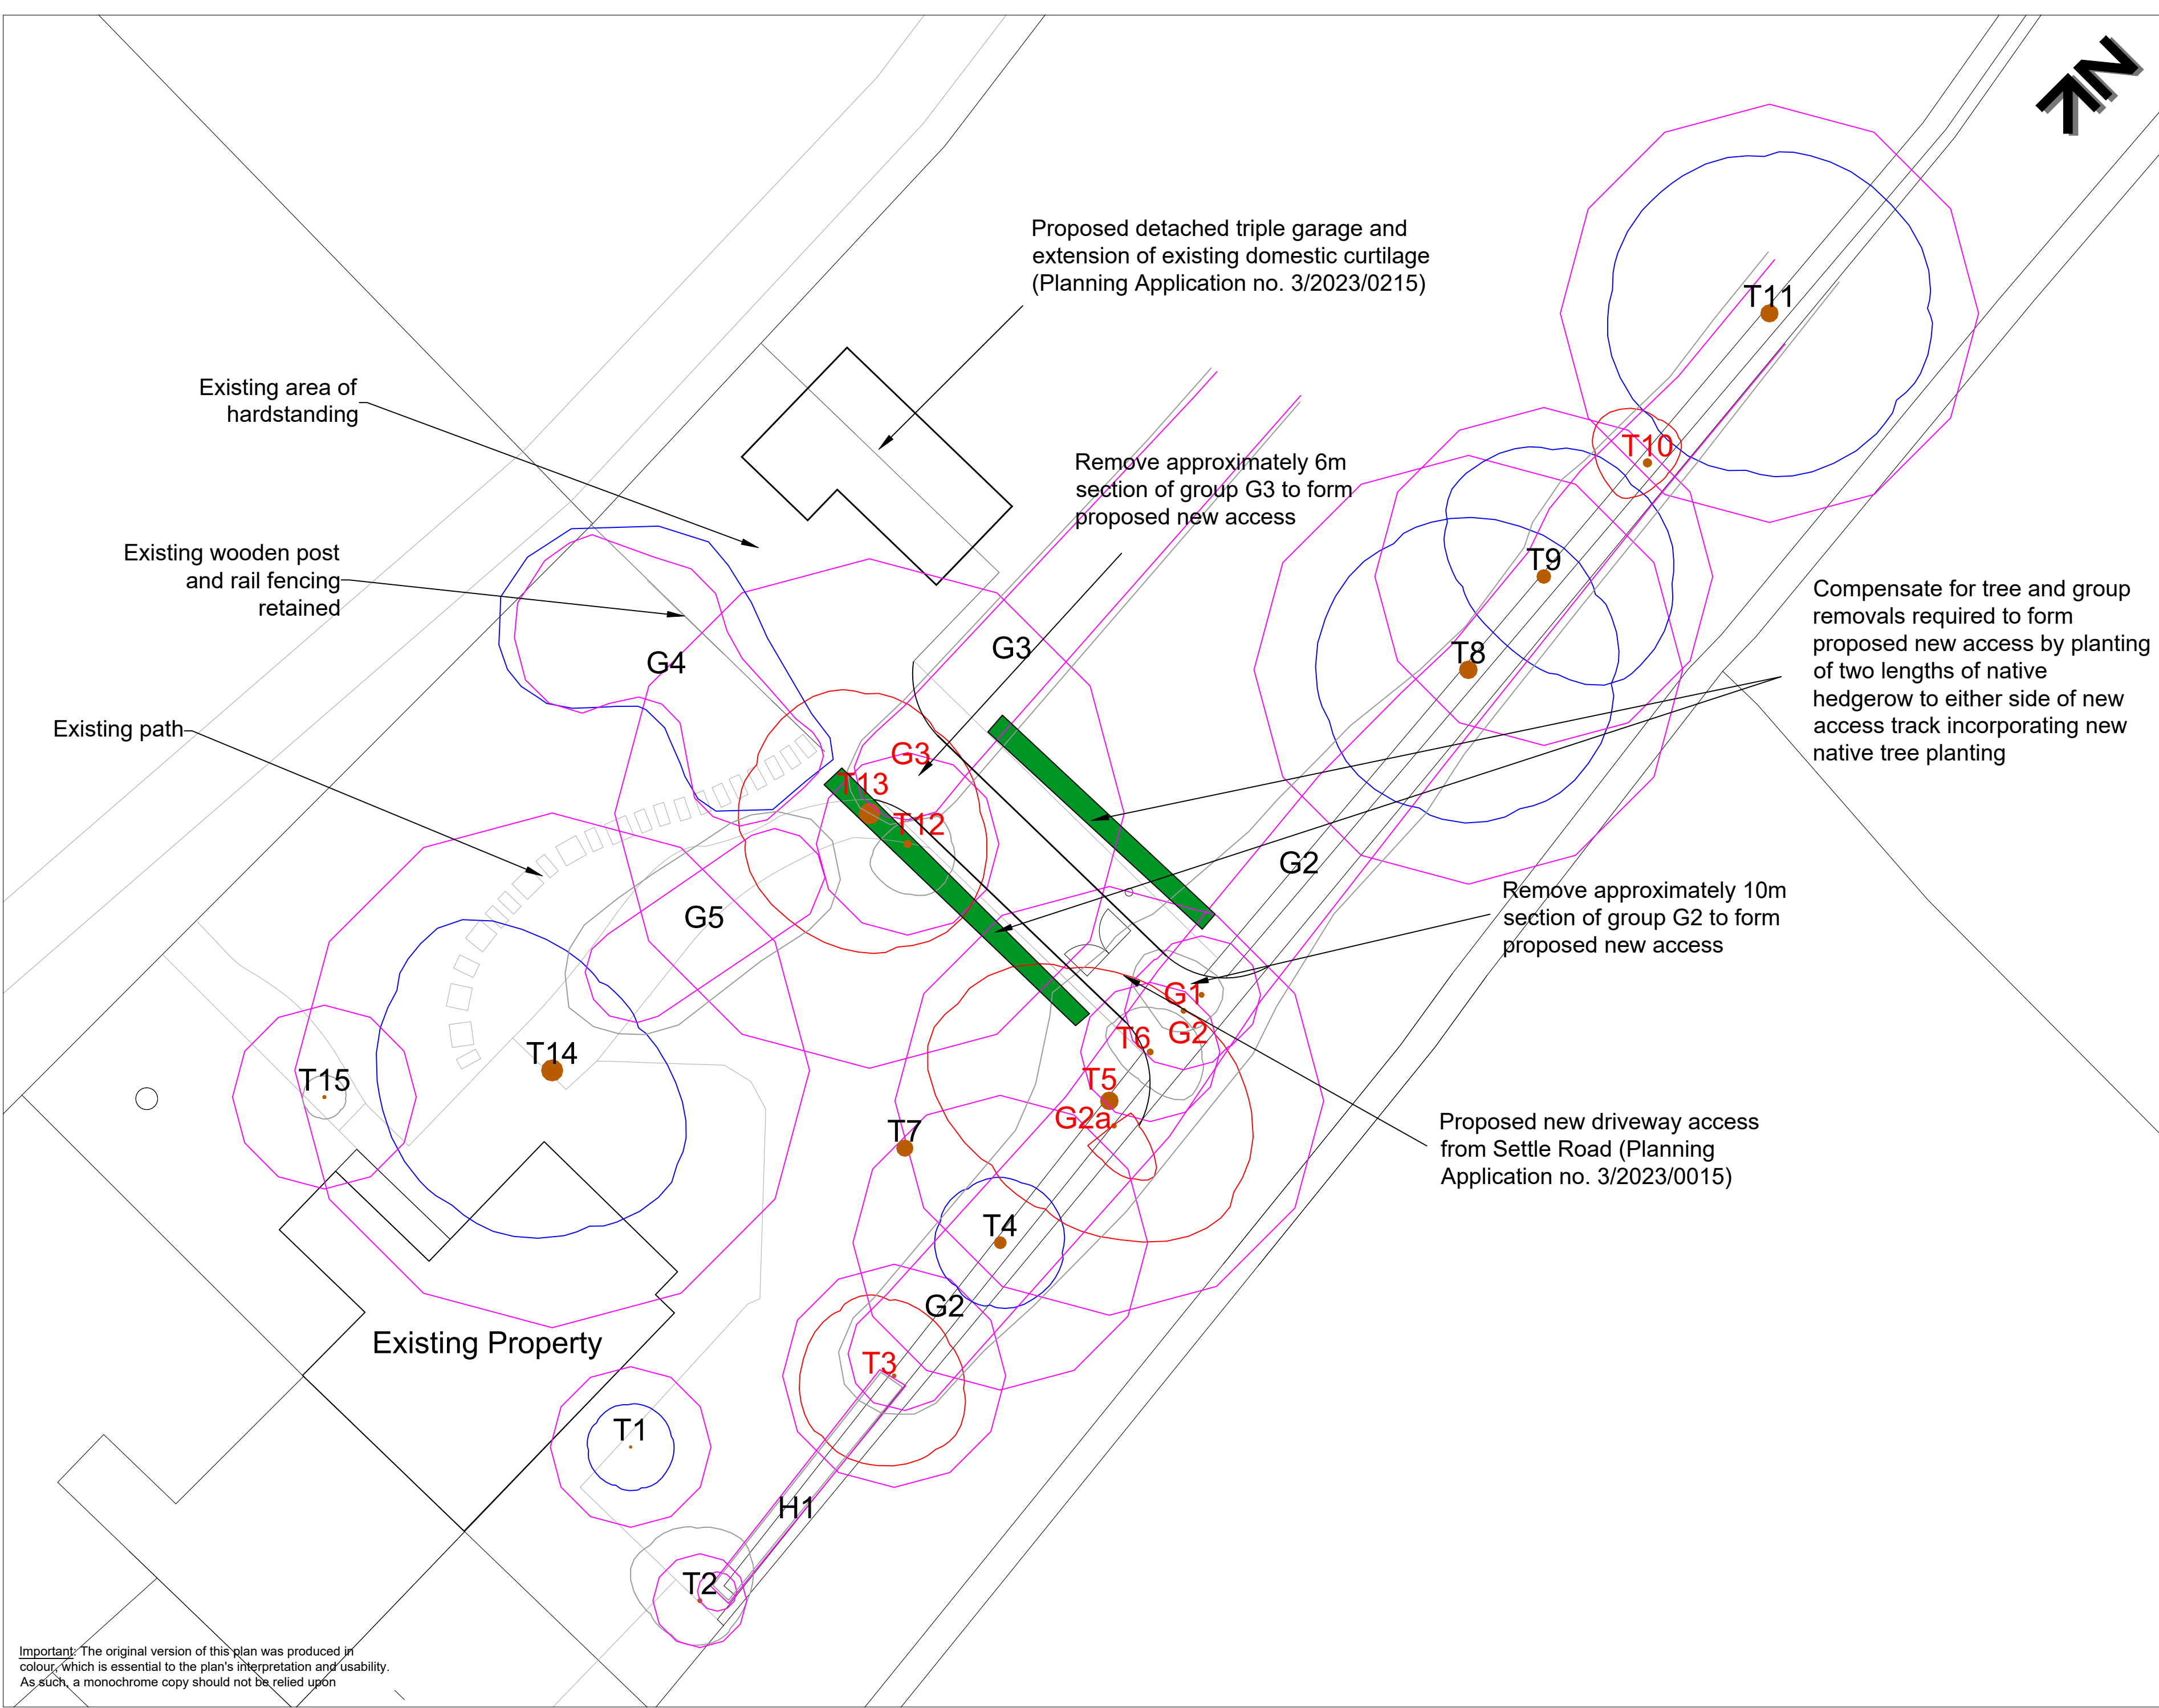

Important: The original version of this plan was produced in colour, which is essential to the plan's interpretation and usability. As such, a monochrome copy should not be relied upon

KEY

T = Individual Tree
G = Group of Trees
H = Hedge

Please refer to associated Tree Survey Schedule and appendices for specific details in respect of items below:

Tree Categorisations:

Those to be Considered for Retention:

Category 'A' Tree/Group/Hedge
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years

Category 'B' Tree/Group/Hedge
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 20 Years

Category 'C' Tree/Group/Hedge
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years, or Young Trees

Those Considered Unsuitable for Retention:

Category 'U' Tree/Group/Hedge
Those in Such a Condition that they Cannot Realistically be Retained as Living Trees in the Context of the Current Land Use for Longer Than 10 Years

Note 1: The stem location of trees and stem locations and extents of the groups of trees and hedges were not plotted on the ordnance survey based site plan provided, and their locations were subsequently plotted by the arboricultural surveyor using GPS siting and estimation at the time of the survey. As such, the plotted location of the trees and indicated extents of groups and hedges cannot therefore be considered to be wholly accurate

Note 2: Trees with their identifying numbers labelled in **red** are proposed for removal in the context of the proposed development

Root Protection Areas (RPAs):

RPAs
Area(s) of Ground Around Trees that Should be Protected Throughout Development Works with Protective Fencing to form a Construction Exclusion Zone - see Temporary Protective Fencing Specification

Summary of Tree Removals:

Tree Removals Required to Implement Development
Planning Application No. 3/2023/0015:
T6, T12, G1, G2 (part), G3 (part)

Tree Removals Required to Implement Development
Planning Application No. 3/2023/0215:
None.

Tree Removals Recommended Regardless of Development:
T3, T5, T10, T13, G2a

Project:
LANESIDE HOUSE
FOREST BECK BROW
WIGGLESWORTH
NORTH YORKSHIRE
BD23 4SL

Client:
KATE MASON

Title:
TREE IMPACT PLAN
in Relation to Proposed Construction of New Driveway Access (Planning Application No. 3/2023/0015) and Detached Triple Garage (Planning Application No. 3/2023/0215) at

Scale:	1:200@A2
Date:	May 2023
Drawn by:	JL
Checked by:	RG

Bowland

Tree Consultancy Ltd

e: info@bowlandtreeconsultancy.co.uk
t: 01772 437150

Ref: BTC2710-TIP Rev: