

Hi-MO 5m

LR5-54HIB 390~410M

- Suitable for distributed projects
- Advanced module technology delivers superior module efficiency
 - M10 Gallium-doped Wafer
 - Integrated segmented ribbons
 - 9-busbar Half-cut Cell
- Excellent outdoor power generation performance
- Aesthetic appearance with all black module design



12-year Warranty for
Materials and Processing



25-year Warranty for Extra
Linear Power Output

Complete System and Product Certifications

IEC 61215, IEC 61730, UL 61730

ISO9001:2015: ISO Quality Management System

ISO14001: 2015: ISO Environment Management System

ISO45001: 2018: Occupational Health and Safety

TS62941: Guideline for module design qualification and type approval

LONGi



21.0%
MAX MODULE
EFFICIENCY


0~3%
POWER
TOLERANCE

<2%
FIRST YEAR
POWER DEGRADATION


0.55%
YEAR 2-25
POWER DEGRADATION

HALF-CELL
Lower operating temperature

Additional Value

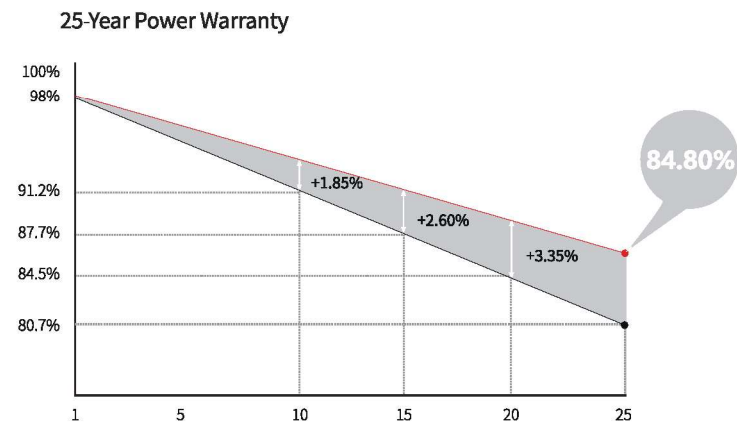

Mechanical Parameters	
Cell Orientation	108 (6×18)
Junction Box	IP68, three diodes
Output Cable	4mm², +400, -200mm length can be customized
Glass	Single glass, 3.2mm coated tempered glass
Frame	Anodized aluminum alloy frame
Weight	21.5kg
Dimension	1722×1134×30mm
Packaging	36pcs per pallet / 216pcs per 20' GP / 936pcs per 40' HC

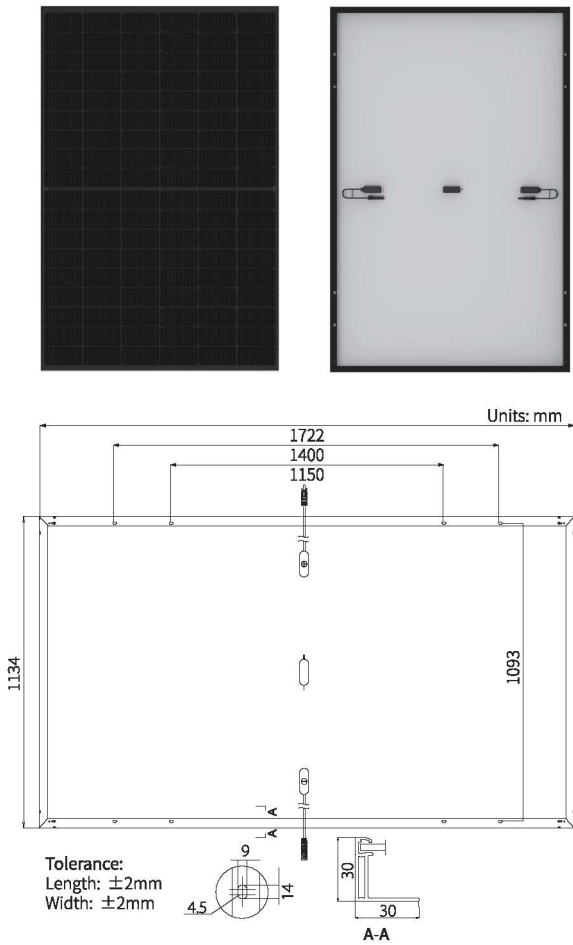

Electrical Characteristics		STC : AM1.5 1000W/m² 25°C		NOCT : AM1.5 800W/m² 20°C 1m/s		Test uncertainty for Pmax: ±3%				
Module Type		LR5-54HIB-390M		LR5-54HIB-395M		LR5-54HIB-400M		LR5-54HIB-405M		LR5-54HIB-410M
Testing Condition		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC NOCT
Maximum Power (Pmax/W)		390	291.5	395	295.2	400	299.0	405	405.0	410 306.5
Open Circuit Voltage (Voc/V)		36.40	34.23	36.65	34.46	36.90	34.70	37.15	37.15	37.40 35.17
Short Circuit Current (Isc/A)		13.59	10.99	13.66	11.04	13.72	11.09	13.78	13.78	13.84 11.19
Voltage at Maximum Power (Vmp/V)		30.45	28.29	30.70	28.52	30.94	28.74	31.18	31.18	31.42 29.19
Current at Maximum Power (Imp/A)		12.81	10.31	12.87	10.35	12.93	10.40	12.99	12.99	13.05 10.50
Module Efficiency(%)		20.0		20.2		20.5		20.7		21.0

Operating Parameters	
Operational Temperature	-40°C ~ +85°C
Power Output Tolerance	0 ~ 3%
Voc and Isc Tolerance	±3%
Maximum System Voltage	DC1000V (IEC/UL)
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45±2°C
Protection Class	Class II
Fire Rating	UL type 1 or 2 IEC Class C

Mechanical Loading	
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

Temperature Ratings (STC)	
Temperature Coefficient of Isc	+0.050%/°C
Temperature Coefficient of Voc	-0.265%/°C
Temperature Coefficient of Pmax	-0.340%/°C