

Subject RE: Windows for Clitheroe mosque

From Josh Douglas

To:

Date 6 Mar at 11:08

Ahmed,

See attached order confirmation showing the spec etc. I have attached a drawing showing the sectional size of the windows I propose.


Kind Regards,

Josh Douglas



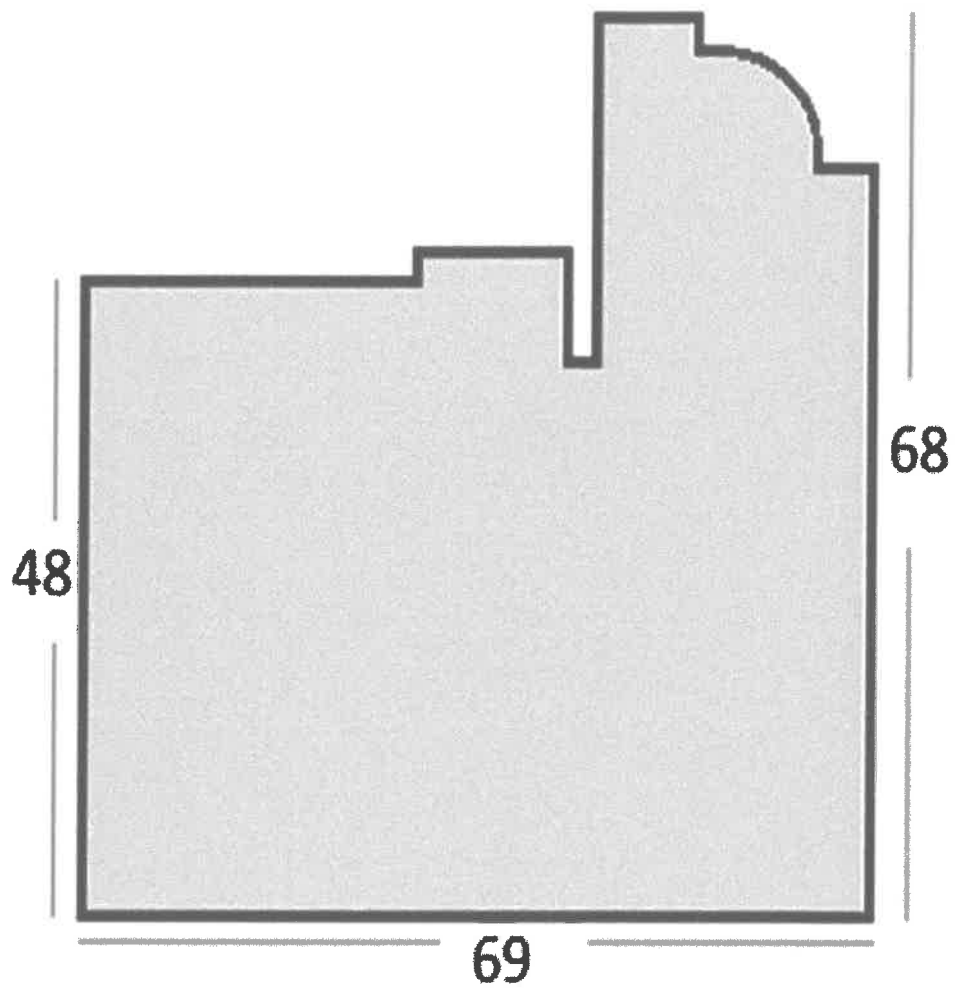
PREMIUM QUALITY BESPOKE TIMBER WINDOWS & DOORS

[View more](#)



[Clitheroe Mosque.pdf](#)

WINDOWS PROFILE SUBMITTED BY DOUGLAS AND PETERS FOR WINDOWS REPLACEMENT IN
CLITHEROE MOSQUE (93-97 LOWERGATE, BB7 1AG)



Window - (W1) Part Q Compliant Stormproof Casement Window 69 x 69 - Cill Nosing: 70mm (Standard) - Trickle Vents: Yes (White Concealed) - Weatherseal: Black - Drip Head: Yes - Window Board Groove: Yes Ironmongery spec: Part Q compliant High security multi point espag locking with In Line (Satin Chrome) Handle & Egress Hinges. Timber type: Laminated Softwood Timber type: Accoya Bead 4:16:4 - Low E - Clear Annealed - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White) U-value=1.4 22.20 kgs 850mm 850mm 1 £402.71 £402.71 940mm 2810mm Window - W2 Gothic Arched Stormproof Window - Same Spec as W1 + Toughened / Laminated Safety Glazing. 1


↑ W1 spec : Reference for windows



W3

W4

W5

W5A

Item (sizes)	Description	Qty
1480mm 	Window - W3 Direct Glazed Shaped Window - Same Spec as W1 + Toughened / Laminated Saftey Glazing.	1
480mm 	Window - W4 Direct Glazed Bullseye Window - Same Spec as W1 + Toughened / Laminated Saftey Glazing.	2
510mm 1230mm 	Window - W5 Direct Glazed Arched Window - Same Spec as W1 + Toughened / Laminated Saftey Glazing.	3
510mm 1230mm 	Window - W5A Stormproof Arched Window - Same Spec as W1 + Toughened / Laminated Saftey Glazing.	2
530mm 1050mm 	Window - (W6) Part Q Compliant Stormproof Casement Window 69 x 69 - Cill Nosing: 70mm (Standard) - Trickle Vents: Yes (White Concealed) - Weatherseal: Black - Drip Head: Yes - Window Board Groove: Yes No Ironmongery Supplied Timber type: Laminated Softwood Timber type: Accoya Bead 6.8 :14 :4 -Part Q - Low E - Clear Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White) U-value=1.4 90.37 kgs	5
1030mm 1720mm 	Window - W7 Direct Glazed Arched Window - Same Spec as W1 + Toughened / Laminated Saftey Glazing.	3
460mm 1630mm 	Window - (W8) Part Q Compliant Stormproof Casement Window 69 x 69 - Cill Nosing: 70mm (Standard) - Trickle Vents: Yes (White Concealed) - Weatherseal: Black - Drip Head: Yes - Window Board Groove: Yes Ironmongery spec: Part Q compliant High security multi point espag locking with In Line (Satin Chrome) Handle & Egress Hinges. Timber type: Laminated Softwood Timber type: Accoya Bead 6.8 :14 :4 -Part Q - Low E - Clear Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White) U-value=1.4 24.34 kgs	1

Item (sizes)	Description	Qty
910mm 2740mm 	Window - W9 Direct Glazed Arched Window - Same Spec as W1 + Toughened / Laminated Safety Glazing.	1
790mm 1510mm 	Window - (W10) Part Q Compliant Stormproof Casement Window 69 x 69 - Cill Nosing: 70mm (Standard) - Trickle Vents: Yes (White Concealed) - Weatherseal: Black - Drip Head: Yes - Window Board Groove: Yes Ironmongery spec: Part Q compliant High security multi point espag locking with In Line (Satin Chrome) Handle & Egress Hinges. Timber type: Laminated Softwood Timber type: Accoya Bead 6.8 :14 :4 -Part Q - Low E - Obscure Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White) U-value=1.3 38.93 kgs	1
1350mm 2280mm 	Window - (W11) High Performance Stormproof Window to accommodate 24mm D/G Units Timber type: Laminated Softwood 6.8 :14 :4 -Part Q - Low E - Obscure Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White) U-value=1.3 100.95 kgs Casement Timber type: Laminated Softwood Timber type: Accoya Bead 6.8 :14 :4 -Part Q - Low E - Obscure Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White)	1
1350mm 2630mm 	Window - (W12) High Performance Stormproof Window to accommodate 24mm D/G Units Timber type: Laminated Softwood 6.8 :14 :4 -Part Q - Low E - Obscure Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White) U-value=1.3 114.79 kgs Casement Timber type: Laminated Softwood Timber type: Accoya Bead 6.8 :14 :4 -Part Q - Low E - Obscure Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White)	1
1350mm 2820mm 	Window - (W13) High Performance Stormproof Window to accommodate 24mm D/G Units Timber type: Laminated Softwood 6.8 :14 :4 -Part Q - Low E - Obscure Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White) U-value=1.3 122.31 kgs Casement Timber type: Laminated Softwood Timber type: Accoya Bead 6.8 :14 :4 -Part Q - Low E - Obscure Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White)	1

Item (sizes)	Description	Qty
	Window - (W14) High Performance Stormproof Window to accommodate 24mm D/G Units Timber type: Laminated Softwood 6.8 :14 :4 -Part Q - Low E - Obscure Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White) U-value=1.4 57.95 kgs Casement Timber type: Laminated Softwood Timber type: Accoya Bead 6.8 :14 :4 -Part Q - Low E - Obscure Laminated/Toughened - Argon filled - Black Warm Edge Spacer Bar Fully Finished RAL 9016 (Traffic White)	1
Installation Cost (Removal of Existing and Installation of New including Mastic Sealing & Trims Supplied by Douglas & Peters). Does not include disposal of existing Frames. -		

Total Weight 549.63 kgs

NOTES:

Diagrams of windows, doors and frames indicate style viewed from the outside and do not reflect size. All weights shown on this document are approximate and are intended to assist in manual handling considerations.

All Douglas & Peters products are supplied as per our standard terms and conditions and are the sale agreement between the parties. A copy of our terms & conditions is available upon request or can be downloaded from our website [REDACTED]

I accept the above details are correct
Please sign here.