

320240829P

Tree Risk Management Appraisal

of Trees Located within Boundaries of



**St Mary's Vicarage,
Main Street, Gisburn,
Lancashire, BB7 4HR**

Prepared by:

Bowland 
Tree Consultancy Ltd

August 2024

**TREE RISK MANAGEMENT APPRAISAL
ST MARY'S VICARAGE, MAIN STREET, GISBURN**

CONTENTS

1. CIVIL LAW REGARDING TREE OWNERSHIP AND DUTY OF CARE
2. QTRA METHODOLOGY OVERVIEW AND APPLICATION IN MANAGEMENT DECISIONS
3. PROTECTED SPECIES AND STATUTORY RESTRICTIONS
4. SUMMARY OF SURVEY FINDINGS AND RECOMMENDATIONS
5. GENERAL TREE MANAGEMENT COMMENTS
6. TREE RISK MANAGEMENT STRATEGY RECOMMENDATIONS
7. TREE SURVEY SCHEDULE
8. TREE SURVEY PLAN
9. QTRA PRACTICE NOTE

Unit Two
11 Cannon Street
Preston
Lancashire
PR1 3NR

T: 01772 437150

E: info@bowlandtreeconsultancy.co.uk

Ground Floor
14 Castlegate
Penrith
Cumbria
CA11 7HZ

T: 01768 744450

**TREE RISK MANAGEMENT APPRAISAL
ST MARY'S VICARAGE, MAIN STREET, GISBURN**

PROJECT DETAILS

Project No.: BTC3022

Site: St Mary's Vicarage, Main Street, Gisburn, Lancashire, BB7 4HR

Survey Type: Individual Tree Survey

Tree(s) Considered: Areas as identified by client

Report Time Frame: 12 months from date of issue

Next Inspection Date: ≈18 months from date of issue

Client: John Griffiths

Survey Dates: 30 July 2024

Surveyor: Joseph Lambert BSc(Hons) FdSc MArborA MICFor

Report Prepared by: Joseph Lambert BSc(Hons) FdSc MArborA MICFor

Report Checked by: Phill Harris MSc BSc(Hons) HND MArborA CEnv MICFor

Date of Issue: 30 August 2024

Version No: 1

1. CIVIL LAW REGARDING TREE OWNERSHIP AND DUTY OF CARE

- 1.1 Under civil law the owner of the land on which a tree stands, together with any party who has control over the tree's management, has a duty of care to take reasonable steps to prevent or minimise the risk of personal injury and/or damage to property from any tree located within the curtilage of the land in question.
- 1.2 In turn, it is accepted that these steps should normally include commissioning a qualified and experienced arboriculturist to survey the tree in order to identify and appraise any risk of harm to persons or damage to property that it may present and, where unacceptable risks are identified, taking suitable remedial action to negate or reduce those risks accordingly.

2. QTRA METHODOLOGY OVERVIEW AND APPLICATION IN MANAGEMENT DECISIONS

- 2.1 A survey was carried out in order to consider the general structural stability of the identified trees at the site and the associated risk of harm posed to persons and/or property and, from this information, to make management recommendations to reduce any risks identified to be unacceptable to a level that is considered to be either tolerable or broadly acceptable (see Table 1, below).
- 2.2 The Quantified Tree Risk Assessment (QTRA) methodology utilised for the tree survey (see appended QTRA Practice Note for more details) quantifies the three components of tree failure risk, which are:
 - i. *Target* (something with potential to be harmed and/or damaged by the mechanical failure of tree parts);
 - ii. *Impact Potential*; and
 - iii. *Probability of Failure* (within the coming year).
- 2.3 The product of the three component values is the annualised 'Risk of Harm', which is a combined measure of the likelihood and the consequence of tree failure considered in terms of the loss within the coming year, and is expressed as a probability. In applying the 'Tolerability of Risk Framework' (ToR) the QTRA methodology divides the 'Risk of Harm' into three threshold values, being:
 1. *Unacceptable* (i.e. >1/1,000), which is unacceptable and will not ordinarily be tolerated;
 2. *Tolerable* (i.e. between 1/1,000,000 and 1/1,000, where the Risk of Harm will be tolerable if it is As Low As Reasonably Practicable (ALARP); but a Risk of Harm 1/10,000 or greater will not ordinarily be Tolerable where it is imposed on others, such as the public. In the Tolerable range management decisions are informed by consideration of the benefits and costs of risk control, including benefits provided by trees that would be lost to risk control measures; and
 3. *Broadly Acceptable* (<1/1,000,000), which is already ALARP.
- 2.4 The QTRA advisory thresholds, (see Table 1, below) are proposed as a reasonable approach to balancing safety from falling trees with the costs of risk reduction. This approach takes account of the principles of ALARP and ToR, but does not dictate how these principles should be applied. While the thresholds can be the foundation of a robust policy for tree risk management, tree managers should make decisions based on their own situation, values and resources.

Table 1: QTRA Advisory Risk Thresholds:

Threshold	Description	Action
Risk of harm of 1/1,000 or greater	Unacceptable - Risks will not ordinarily be tolerated	<ul style="list-style-type: none"> ▪ Control the risk
Risk of harm between 1/1,000 and 1/10,000	Unacceptable (where imposed on others) - Risks will not ordinarily be tolerated	<ul style="list-style-type: none"> ▪ Control the risk ▪ Review the risk
	Tolerable (by agreement) Risks may be tolerated if those exposed to the risk accept it, or the tree has exceptional value	<ul style="list-style-type: none"> ▪ Control the risk unless there is broad stakeholder agreement to tolerate it, or the tree has exceptional value ▪ Review the risk
Risk of harm between 1/10,000 and 1/1,000,000	Tolerable (where imposed on others) - Risks are tolerable if ALARP	<ul style="list-style-type: none"> ▪ Assess costs and benefits of risk control ▪ Control the risk only where a significant benefit might be achieved at reasonable cost ▪ Review the risk
Risk of harm less than 1/1,000,000	Broadly Acceptable - Risk is already ALARP	<ul style="list-style-type: none"> ▪ No action currently required ▪ Review the risk

- 2.5 As detailed in Table 1, a Risk of Harm less than 1/1,000,000 is Broadly Acceptable and already ALARP (i.e. 'as low as reasonably practicable'). A Risk of Harm 1/1,000 or greater is unacceptable and will not

ordinarily be tolerated. Between these two thresholds, the Risk of Harm is in the Tolerable region of the ToR Framework and will be tolerable if it is ALARP, but a Risk of Harm 1/10,000 or greater will not ordinarily be Tolerable where it is imposed on others, such as the public. Here, management decisions are informed by consideration of the benefits and costs of risk control, including benefits provided by trees that would be lost to risk control measures.

- 2.6 In respect of the above the assessor (i.e. Bowland Tree Consultancy Ltd) may consider the costs of risk control when providing options for management if specifically asked to do so, but the tree owner/manager, who owns the risk and therefore exercises control over the costs, must consider the balance and make the final management decision(s).

3. PROTECTED SPECIES AND STATUTORY RESTRICTIONS

Tree Preservation Orders and Conservation Area Designations

- 3.1 The Town & Country Planning Act (1990) (the Act) and associated Regulations empower Local Planning Authorities (LPAs) to protect trees in the interests of amenity by making Tree Preservation Orders (TPOs). The Act also affords protection for trees of over 75mm diameter that stand within the curtilage of a Conservation Area (CA). Subject to certain exemptions, an application must be made to the LPA in question to carry out works upon or to remove trees that are subject to a TPO, whilst six weeks' notice of intention must be given to carry out works upon or to remove trees within a CA that are not protected by a TPO.
- 3.2 According to information available on Ribble Valley Borough Council's website, the site stands within the Gisburn Conservation Area. As such, it is essential that, other than for limited exemptions, an applicable section 211 notice must be submitted to the council prior to scheduling or undertaking any tree works at the site.

Protected Species

- 3.3 Nesting birds are afforded statutory protection under the Wildlife & Countryside Act (1981) (as amended) and their potential presence should therefore be considered when clipping hedges, removing climbing plants and pruning and removing trees. The breeding period for woodlands runs from March to August inclusive. Hedges provide valuable nesting sites for many birds and clipping should therefore be avoided during March to July. Trees, hedges and ivy should be inspected for nests prior to pruning or removal and any work likely to destroy or disturb active nests should be avoided until the young have fledged.
- 3.4 All bat species and their roosts are protected under Schedule 5 of the Wildlife & Countryside Act (1981) (as amended) and under Schedule 2 of the Conservation of Habitats and Species Regulations 2017 (as amended). In this respect, it should be noted that it is possible that unidentified bat habitat features may be located high in tree crowns and all personnel carrying out tree works at the site should therefore be vigilant and mindful of the possibility that roosting bats may be present in trees with such features. If any bat roosts are identified, then it is essential that works are halted immediately and that a suitably qualified and experienced ecologist investigates and advises on appropriate actions prior to works continuing.
- 3.5 In turn, any subsequent works carried out in relation to any protected species must be carried out under guidance from a suitably qualified and experienced ecologist and in strict accordance with applicable industry guidance (i.e. BS8596:2015 - Surveying for Bats in Trees and Woodlands).

Felling Licences

- 3.6 Subject to certain exemptions the Forestry Act (1967) requires that a 'Felling Licence' be obtained to remove growing trees amounting to more than five cubic metres of timber in a calendar quarter, providing no more than two cubic metres are sold. Felling Licences are administered by the Forestry Commission and contravention of the associated controls can incur substantial penalties. A felling licence is, however, not required for the felling of trees immediately necessary for the purpose of carrying out development authorised by a full planning permission granted under the Town and Country Planning Act 1990. Exemptions to felling licences also apply to trees standing within the curtilage of a private residential garden, orchard, churchyard or in public open spaces such as land registered under the Commons Act 1899, village greens, public parks and public gardens.

4. SUMMARY OF SURVEY FINDINGS AND RECOMMENDATIONS

- 4.1 An 'Individual Tree Survey' (see 'Schedule of Operations' appended to agreed project quote) was carried out on 30 July 2024 at the site under consideration. The ownership boundaries were identified verbally by the instructing client John Griffiths during the site visit.
- 4.2 The survey identified 16 individual trees and two groups of trees. The surveyed trees are in the semi-mature to mature age range and have heights of up to 25 metres, have stem diameters of up to 1100 millimetres, and maximum diametrical crown spreads of up to approximately 17 metres.
- 4.3 The site under consideration is a detached residential property and its associated private garden areas. The trees stand within groups and as individuals to the property's north and west.
- 4.4 The property is bordered to the north by an adjacent agricultural field, to the east and south by adjacent residential properties and their associated private gardens and to the west by the high usage A682 Hellifield Road (see appended Tree Survey Plan). There is a single vehicular access point to the south from the A59 Main Street, leading to a vehicle parking and turning area.
- 4.5 As a component of this appraisal various targets were identified to be within falling distances of the surveyed trees, including, but not restricted to, vehicles and occupants travelling along the high usage Hellifield Road and using the driveway to access the residential property, pedestrians using the footpath adjacent to Hellifield Road, persons using private garden areas of the property and the neighbouring properties, and various item of property including the property itself, various neighbouring properties, parked vehicles, street furniture, and boundary features such as fences and walls.
- 4.6 Furthermore, it is noted that a widespread presence of Ash Dieback Disease (*Hymenoscyphus fraxineus*) was identified throughout the Ash tree population, both within the site under consideration and the wider local landscape. Consequently, all Ash trees exhibiting a late stage of decline as a result of the disease have been recommended for removal in accordance with prudent arboricultural practice.
- 4.7 In turn, as a guide, the surveyed Ash trees have been assessed in accordance with the following scales of approximate percentages of remaining canopy at the time of viewing:
- Class 1 – 100% canopy - Healthy trees displaying good vitality;
 - Class 2 – 75% canopy - Weakened trees show treetop shoots in the degeneration phase;
 - Class 3 – 50% canopy – Severely weakened trees exhibiting a significant reduction in vitality, e.g. with bushy and lumpy accumulation of growth; and
 - Class 4 – 25% canopy – Trees in a state of severe decline, e.g. with large dead canopy areas and twigs and branches starting to break off.
- 4.8 Regarding these classifications, it is emphasised that trees falling within classes 3 and 4 are normally recommended for risk management remedial work where targets exist within falling distance of said trees.
- 4.9 In turn, as detailed in the appended Tree Survey Schedule and Table 2, below and overleaf, trees T02 and T06 are classed as having calculated QTRA risk indices that fall within the unacceptable risk threshold range of 1/10,000 or over (please refer to Table 1, on the previous page, with regard to advisory tree risk thresholds). Consequently, as also detailed in the TSS, remedial management works are recommended in order to mitigate the risk that they present. Additionally, various non risk related management works are recommended for consideration to attain clearances to roads or structures, or for other arboricultural management reasons.

Table 2: Tree Work Recommendations:

No.	Species	Management Works Recommended*	Responsible Professional	Work Priority
T01	Common Lime	1. Maintain clear stem to 2m height by annual removal of basal stem growth to facilitate future detailed inspections (I).	1. Client	1. Low
T03	Common Holly	1. Prune back to boundary fence on west side (M).	1. Tree contractor	1. Moderate
T06	Common Ash	1. Remove tree due to identified increased risk of failure and subsequent unacceptable risk of harm to persons resultant of colonisation by ADD.	1. Tree contractor	1. High

Table continued overleaf

Table 2: Tree Work Recommendations (continued):

No.	Species	Management Works Recommended*	Responsible Professional	Work Priority
T07	Common Hawthorn	1. Sever Ivy around stem base to prevent dominance within canopy (M).	1. Client	1. Low
T08	Common Ash	1. Remove tree due to evident poor condition and projected subsequent continued decline.	1. Tree contractor	1. Moderate
T09	Common Holly	1. Prune back to boundary on west side to attain clearance to road (M).	1. Tree contractor	1. Moderate
T10	Common Hawthorn	1. Prune back to boundary on west side to attain clearance to road (M).	1. Tree contractor	1. Moderate
T15	Sycamore	1. Evaluate cost benefit of wall repairs and reinforcement versus tree removal and replacement, and to either: 2. Remedial works: Option 1: ▪ Retain trees and undertake repairs and adjustments to wall to reduce likelihood of further displacement; or Option 2: ▪ Tree contractor to remove tree to prevent continued displacement of wall, and replace with new tree of suitable large growing native species in appropriate location.	1. Client	1. Moderate
T16	Common Lime	1. Clear basal stem growth to facilitate future detailed inspections (I). 2. Prune tree to remove deadwood >50mm diameter to reduce nuisance drop onto formal lawn area.	1. Tree contractor 2. Tree contractor	1. Moderate 2. Moderate
G 01	2no. Leyland Cypress	1. Consider long term management of trees as component of management of wider tree group, and to either: Option 1: ▪ Tree contractor to remove group to facilitate growth of adjacent better quality trees and propensity for weak fork failure of species on to adjacent road; or Option 2: ▪ Tree contractor to prune trees to significantly reduce heights to approximately 10m, to facilitate growth of adjacent better quality trees and propensity for weak fork failure of species on to adjacent road, but retain screening of group.	1. Client	1. Moderate

*Note: it shall be the client's responsibility to arrange contact with the applicable council's planning department to check for any statutory tree protection, and obtain any necessary permissions if required, prior to scheduling or carrying out any tree works

4.10 In turn, Table 3, below, details the trees that are recommended for more detailed inspections for risk management related reasons following any works recommended in Table 2, along with their accompanying re-inspection schedule.

Table 3: Tree Re-Inspection Recommendations:

No.	Species	Re-Inspection Recommendations*	When?
T02	Common Lime	1. Undertake detailed invasive inspection of lower stem to establish extents of basal decay and hollowing, and make subsequent recommendations where appropriate.	1. Within 6 months of report date

*Note: Unless otherwise specified, all inspections detailed in Table 3 are to be carried out by project tree consultant upon instruction by client

4.11 Furthermore, with regard to the above, it is noted that, where trees are recommended for removal, whether for risk management purposes or for other arboricultural management reasons, then it is recommended that replacement trees of suitable sizes and species be planted in appropriate locations of the site, both in order to compensate for the loss of the multiple benefits the trees provided to the environment, and to help ensure continuity of canopy cover in the local area. Accordingly, new tree planting advice should be

sought from the project tree consultant, and may need to be agreed with the LPA in respect of any statutory tree protection at the site.

- 4.12 Subsequently, any new tree planting should be carried out in strict accordance with BS8545:2014 that they are of a suitable quality for usage, and that they are provided with adequate care and maintenance following planting for them to successfully establish and, over the long term, grow to maturity.

5. GENERAL TREE MANAGEMENT COMMENTS

- 5.1 During the course of the survey it was noted that the canopies of several of the trees border Hellifield Road. In this respect it is generally accepted that the minimum clearances should be approximately 2.5 metres over a footpath and 5.05 metres over a road carriageway which, in turn, should give sufficient clearance for a person with a raised umbrella to walk unimpeded along a footpath and for a double-decker bus to travel along a road without striking any overhanging branches. Furthermore, adequate clearance should be maintained to visibility splays from junctions and accesses and also to road signs and street lights.
- 5.2 Additionally, it was noted that the canopies of various trees are close to buildings on the site and adjacent structures. As such, it is recommended that general periodic maintenance pruning should be undertaken, as and when necessary, in order to ensure adequate canopy clearances are maintained to roads, footways, internal structures and any overhead utilities such as overhead telephone lines.

6. TREE RISK MANAGEMENT STRATEGY RECOMMENDATIONS

- 6.1 In consideration of the high usage of the adjacent Hellifield Road and the proximity of the trees to various items of property, and the associated identified targets such as parked and moving vehicles and pedestrians and residential properties, it is subsequently recommended that all of the trees be re-inspected on a cyclical programme of roughly every 18 months, so that they can be alternately viewed whilst both in and out of leaf in order to monitor both their structural and physiological condition and, consequently, for the site occupiers to meet their duty of care. In this respect it is therefore recommended that the trees be re-inspected during winter 2025/26.
- 6.2 Additionally, it is strongly recommended that the client undertakes a walkover check of trees around the site following any inclement weather events, as well as casually observing the trees during their day to day activities and routines. This is recommended in order to help identify any obvious risk features, such as broken, split or hanging branches, root-plate heave, the apparition of fungal fruiting bodies, etc., that may have occurred following inclement weather, and, if subsequently identified as necessary, to then seek appropriate advice from a tree contractor or tree consultant.

Site: St Mary's Vicarage, Main Street, Gisburn, Lancashire, BB7 4HR
Client: John Griffiths
Brief: Carry out an individual tree survey of trees located on site as identified by the client, report on projected risk posed to persons and property, and make management recommendations where appropriate

Surveyor: Joseph Lambert Chartered Arboriculturist
Survey Date: 30 July 2024
Viewing Conditions: Bright conditions with no discernible wind
Job Reference: BTC3022

No.	Species	Age	Height (m)	Stem Diam. (mm)	Crown Spread (m)	Vitality	Comments	Management Recommendations	Risk Assessment Description (Part/Target)	Target	Size	P.O.F	Reduced Mass %	Risk Index	Work Priority
T01	Common Lime	M	23	660	10	G	<ul style="list-style-type: none"> Stem arises with moderate lean to south-east from ground level, correcting at approximately 2.5m height to vertical. Minor basal stem growth, although not impeding inspection. 	<ul style="list-style-type: none"> Client to maintain clear stem to 2m height by annual removal of basal stem growth to facilitate future detailed inspections (I). 	<ul style="list-style-type: none"> P = Deadwood to 60mm diameter. T = Persons using garden area. 	3	4	3	25%	<1M	L
T02	Common Lime	M	23	800	12	G	<ul style="list-style-type: none"> Tag no. 0637. Part of wider closely spaced tree group. Upper canopy inspection impeded by dense neighbouring canopies. Minor basal stem growth. Adaptive growth around stem from ground level to approximately 2.5m height, with moderate hollowing evident when sounded with nylon mallet. Stem bifurcates at approximately 2.5m with tight included bark union typical of species, and exhibiting settled bark patterns. 	<ul style="list-style-type: none"> Tree consultant to undertake detailed invasive inspection of lower stem to establish extents of basal decay and hollowing, and make subsequent recommendations where appropriate. NB: QTRA risk index to re-evaluated upon further detailed inspection. 	<ul style="list-style-type: none"> P = Stem at ground level. T = Vehicles and occupants using road. 	1	1	4	N/A	4K	H
T03	Common Hawthorn	SM	6	1x120 1x110 (ts)	3	G	<ul style="list-style-type: none"> Understory tree to wider group. Twin-stemmed from ground level. 	<ul style="list-style-type: none"> None. 	N/A	-	-	-	-	<1M	N/A
T04	Common Holly	SM	4	120	3	G	<ul style="list-style-type: none"> Tag 0636. Understory tree. Minor canopy impingement on road to west. 	<ul style="list-style-type: none"> Prune back to boundary fence on west side. 	N/A	-	-	-	-	<1M	N/A
T05	Wild Cherry	EM	19	330	12	G	<ul style="list-style-type: none"> Tag no. 0635. Stem arises with moderate lean to east, correcting to vertical at main bifurcation point at approximately 2.5m height. Canopy highly biased to east due to suppression by surrounding trees, with little growth to north, south or west. 	<ul style="list-style-type: none"> None. NB: Pruning and/or removal for aesthetic benefits may be preferred by client, and should subsequently be discussed with their tree contractor. 	<ul style="list-style-type: none"> P = Stem at ground level. T = Persons using private garden. 	3	2	7	N/A	<1M	N/A

HEADINGS & ABBREVIATIONS

NO.: TREE/GROUP REFERENCE NUMBER. REFER TO PLAN OR NUMBERED TAGS WHERE APPLICABLE
SPECIES: COMMON NAME
AGE: Y = YOUNG, SM = SEMI MATURE, EM = EARLY MATURE, M = MATURE, PM = POST MATURE
HEIGHT: APPROXIMATELY 50% OF TREES ARE MEASURED USING AN ELECTRONIC CLINOMETER AND THE REMAINDER ESTIMATED AGAINST THE MEASURED TREES
DIAMETER: STEM DIAMETER MEASURED OR ESTIMATED AT A HEIGHT OF APPROXIMATELY 1.3 METRES
CROWN SPREAD: MEASURED OR ESTIMATED DIAMETER OF CROWN(S) AT THE WIDEST POINT
VITALITY: A MEASURE OF PHYSIOLOGICAL CONDITION WHEREBY D = DEAD, MD = MORIBUND, P = POOR, M = MODERATE, G = GOOD
MANAGEMENT: SUFFIXES: (M) = FOR GENERAL ARBORICULTURAL OR SILVICULTURAL MANAGEMENT, (S) = TO REMOVE OR REDUCE THE RISK OF DIRECT DAMAGE TO A FIXED STRUCTURE BY MEANS OF CIRCUMFERENTIAL ROOT, STEM OR BRANCH GROWTH, (I) = TO ENABLE THE TREE(S) TO BE INSPECTED FURTHER FOR RISK ASSESSMENT PURPOSES
TARGET RANGE: HIGHEST VALUE TARGET THAT THE MOST SIGNIFICANT PART LIKELY TO FAIL COULD STRIKE. RANGES 1-6 1 = HIGH, 6 = LOW VALUE/OCCUPANCY
RISK ASSESSMENT DESCRIPTION: DESCRIPTION OF PART IDENTIFIED AS MOST LIKELY TO FAIL AND ASSOCIATED TARGET, ASSESSED IN ACCORDANCE WITH QTRA SYSTEM
SIZE RANGE: SIZE CATEGORY OF MOST SIGNIFICANT PART CONSIDERED LIKELY TO FAIL - RANGES 1-4 WHEREBY 1 = LARGE, 4 = SMALL, P = PROPERTY
P.O.F.: PROBABILITY OF FAILURE WITHIN 12 MONTHS. RANGES 1-7 1 = HIGH, 7 = LOW
REDUCED MASS %: WHERE THE MASS OF A TREE OR BRANCH IS REDUCED BY DEGRADATION THE RISK INDEX IS MULTIPLIED TO REFLECT THE PERCENTAGE OF MASS REDUCTION
RISK INDEX: E.G. RISK INDEX 20 = RISK OF SIGNIFICANT HARM 1 IN 20,000 AN ADDITIONAL FIGURE, IN BRACKETS, MAY BE SUFFIXED 'T' REPRESENTING THE RATE OF MULTIPLE OCCUPATION OVER THE YEAR. E.G. 10(10T) REPRESENTS A RISK OF HARM 1/10,000 TO 10 OCCUPANTS OR AN EQUIVALENT MONETARY VALUE. SEE QTRA PRACTICE NOTE FOR MORE INFORMATION REGARDING COLOURS USED TO SIGNIFY RISK INDEX
WORK PRIORITY: H (HIGH) = TREE WORKS TO BE GIVEN IMMEDIATE CONSIDERATION, M (MODERATE) = TREE WORKS TO BE CARRIED OUT WITHIN 12 MONTHS OF SURVEY (TIMING MAY BE SPECIFIED IN MANAGEMENT RECOMMENDATIONS), L (LOW) = TREE WORKS THAT ARE NOT CONSIDERED ESSENTIAL FOR RISK MANAGEMENT PURPOSES, BUT ARE RECOMMENDED IN ACCORDANCE WITH PRUDENT ARBORICULTURAL MANAGEMENT (TO BE REVIEWED IN 12 MONTHS, OR SPECIFIED TIME, IF APPLICABLE), N/A = NOT APPLICABLE



Site: St Mary's Vicarage, Main Street, Gisburn, Lancashire, BB7 4HR
Client: John Griffiths
Brief: Carry out an individual tree survey of trees located on site as identified by the client, report on projected risk posed to persons and property, and make management recommendations where appropriate

Surveyor: Joseph Lambert Chartered Arboriculturist
Survey Date: 30 July 2024
Viewing Conditions: Bright conditions with no discernible wind
Job Reference: BTC3022

Page: 2 of 4

No.	Species	Age	Height (m)	Stem Diam. (mm)	Crown Spread (m)	Vitality	Comments	Management Recommendations	Risk Assessment Description (Part/Target)	Target	Size	P.O.F	Reduced Mass %	Risk Index	Work Priority
T06	Common Ash	EM	23	410	9	P	<ul style="list-style-type: none"> Tag No. 0632. Colonised by Ash Dieback Disease (ADD), with remaining canopy cover falling into Class 3. Part of wider closely spaced tree group. 	Tree contractor to remove tree due to identified increased risk of failure and subsequent unacceptable risk of harm to persons resultant of colonisation by ADD.	<ul style="list-style-type: none"> P = Dead and moribund branches to approximately 100mm diameter. T = Vehicles and occupants using road. 	1	4	2	N/A	5K	H
T07	Common Hawthorn	SM	5.5	120	5	M	<ul style="list-style-type: none"> Understory tree. Dense Ivy becoming dominant in canopy. 	Client to sever Ivy around stem base to prevent dominance within canopy (M).	N/A	-	-	-	-	<1M	-
T08	Common Ash	EM	23	440	9	P	<ul style="list-style-type: none"> Tag no. 0634. Two stems to east, of approximately 200mm diameter, previously removed with decayed stubs and old fungal fruiting bodies of selective white rot decay causing Dryads Saddle (<i>Ceriopsis squamosus</i>) on ground below, likely from decayed stubs. Dense Ivy to stem impeding inspection. Colonised by ADD, with remaining canopy cover falling into Class 3. Relatively short projected remaining life expectancy. 	Tree contractor to remove tree due to evident poor condition and projected subsequent continued decline.	<ul style="list-style-type: none"> P = Dead and moribund branches to 100mm diameter. T = Persons using private garden. 	3	4	2	N/A	500K	M
T09	Common Holly	SM	6	1x210 1x80 (ts)	6	G	<ul style="list-style-type: none"> Tag no. 0630. Understory tree. Minor canopy impingement on road to west. 	Tree contractor to prune back to boundary on west side to attain clearance to road (M).	N/A	-	-	-	-	<1M	-
T10	Common Hawthorn	SM	7	120	3	G	<ul style="list-style-type: none"> Tag no. 0631. Understory tree. Minor canopy impingement on road to west. 	Tree contractor to prune back to boundary on west side to attain clearance to road (M).	N/A	-	-	-	-	<1M	-
T11	Sycamore	EM	23	460	10	G	<ul style="list-style-type: none"> Tag no. 0629. Moderate stem lean to north-east from ground level, correcting at approximately 2m height to vertical. 	None.	<ul style="list-style-type: none"> P = Deadwood to 50mm diameter. T = Persons using private garden area. 	3	4	3	25%	<1M	N/A
T12	Sycamore	EM	23	410	10	G	<ul style="list-style-type: none"> Tag no. 0628. Moderate stem lean to south-east from ground level, correcting at approximately 2m height to vertical. 	None.	<ul style="list-style-type: none"> P = Deadwood to 50mm diameter. T = Persons using private garden area. 	3	4	3	25%	<1M	N/A
T13	Common Holly	SM	5	180	5	G	<ul style="list-style-type: none"> Understory tree. 	None.	N/A	-	-	-	-	<1M	-

Site:	St Mary's Vicarage, Main Street, Gisburn, Lancashire, BB7 4HR
Client:	John Griffiths
Brief:	Carry out an individual tree survey of trees located on site as identified by the client, report on projected risk posed to persons and property, and make management recommendations where appropriate

Surveyor:	Joseph Lambert Chartered Arboriculturist
Survey Date:	30 July 2024
Viewing Conditions:	Bright conditions with no discernible wind
Job Reference:	BTC3022

Page: 3 of 4

No.	Species	Age	Height (m)	Stem Diam. (mm)	Crown Spread (m)	Vitality	Comments	Management Recommendations	Risk Assessment Description (Part/Target)	Target	Size	P.O.F	Reduced Mass %	Risk Index	Work Priority
T14	Sycamore	M	23	600	16	G	<ul style="list-style-type: none"> Tag no. 0624. Located to north of wider group, in low raised stone planter. Stem bifurcates at approximately 2.5m height. 	None.	<ul style="list-style-type: none"> P = Deadwood up to 50mm diameter. T = Persons using private garden. 	3	4	3	25%	<1M	N/A
T15	Sycamore	EM	23	2x700 1x400 (ms)	13.5	G	<ul style="list-style-type: none"> Multiple stems from ground level. Stem arising to north currently contacting boundary stone wall top to north, and evidently causing progressive structural displacement as a result of incremental growth. Multiple stems from ground level with tight unions. Basal area and main stems Ivy covered, which impeded inspection. Some twig dieback on south side, possibly from previous bonfire damage. 	<ul style="list-style-type: none"> Client to evaluate cost benefit of wall repairs and reinforcement versus tree removal and replacement, and to either: <ul style="list-style-type: none"> Option 1: <ul style="list-style-type: none"> Retain trees and undertake repairs and adjustments to wall to reduce likelihood of further displacement; or Option 2: <ul style="list-style-type: none"> Tree contractor to remove tree to prevent continued displacement of wall, and replace with new tree of suitable large growing native species in appropriate location. 	<ul style="list-style-type: none"> P = Deadwood up to 50mm diameter. T = Parked cars below. 	4	P	3	N/A	300 K	M
T16	Common Lime	M	22	1100	17	G	<ul style="list-style-type: none"> Moderately dense basal stem growth, which impeded inspection. Some evidence of minor root damage to 50mm diameter between buttresses, particularly to north-west, possibly resultant of landscaping associated with house renovation. Some partially occluded bark wounds on buttress root tops. Main stem bifurcates at approximately 3m height. Multiple partially occluded wounds to approximately 100mm diameter from previous pruning to raise canopy. Moderate amount of deadwood up to approximately 90mm diameter over lawn. Some minor hollowing detected on adaptive growth rib on west side at approximately 1.5m height. Upper canopy inspection impeded by dense canopy. 	<ul style="list-style-type: none"> Tree contractor to clear basal stem growth to facilitate future detailed inspections (I). Tree contractor to prune tree to remove deadwood >50mm diameter to reduce nuisance drop onto formal lawn area. 	<ul style="list-style-type: none"> P = Deadwood up to approximately 80mm diameter. T = Persons using garden area. 	3	4	2	N/A	500 K	M

Site: St Mary's Vicarage, Main Street, Gisburn, Lancashire, BB7 4HR
Client: John Griffiths
Brief: Carry out an individual tree survey of trees located on site as identified by the client, report on projected risk posed to persons and property, and make management recommendations where appropriate

Surveyor: Joseph Lambert Chartered Arboriculturist
Survey Date: 30 July 2024
Viewing Conditions: Bright conditions with no discernible wind
Job Reference: BTC3022

No.	Species	Age	Height (m)	Stem Diam. (mm)	Crown Spread (m)	Vitality	Comments	Management Recommendations	Risk Assessment Description (Part/Target)	Target	Size	P.O.F	Reduced Mass %	Risk Index	Work Priority
G01	2no. Leyland Cypress	M	≤ 25.5	≤ 730	≤ 12	G	<ul style="list-style-type: none"> Tags 0626 and 0625. Closely spaced pair, forming part of wider group. Canopies suppressing better quality adjacent Sycamore trees to north and south. Tree to north bifurcates at approximately 2.5m height with tight included bark union typical of species. Tree species has propensity for weak union failure, and group is located within falling distance of road. 	<ul style="list-style-type: none"> Client to consider long term management of trees as component of management of wider tree group, and to either: Option 1: <ul style="list-style-type: none"> Tree contractor to remove group to facilitate growth of adjacent better quality trees and propensity for weak fork failure of species on to adjacent road; or Option 2: <ul style="list-style-type: none"> Tree contractor to prune trees to significantly reduce heights to approximately 10m, to facilitate growth of adjacent better quality trees and propensity for weak fork failure of species on to adjacent road, but retain screening of group. 	P = Stem in north tree of approximately 260mm diameter. T = Vehicles and occupants using road.	1	2	5	N/A	100 K	M
G02	2no. Cherry, 1no. Birch, 1no. Yew	EM	≤ 14	≤ 280	≤ 9	M-G	Moderately to closely spaced group in rear garden.	None.	P = Dead branches to 25mm diameter. T = Persons using garden.	3	4	3	25%	<1M	N/A



T = Individual Tree, G = Group of Trees

- (Red) = Tree/Group with Risk of Harm of 1/1,000 or greater
- (Orange) = Tree/Group with Risk of Harm between 1/1,000 and 1/10,000
- (Yellow) = Tree/Group with Risk of Harm between 1/10,000 and 1/1,000,000
- (Green) = Tree/Group with Risk of Harm less than 1/1,000,000

* See CTRA Methodology Overview and Application in Management Decision Section of Report for details regarding Risk of Harm

Site: St Mary's Vicarage, Main Street, Gisburn, BB7 4HR
 Job No.: BTC3022
 Scale: Not to Scale
 Paper Size (for printing): A3
 Date: August 2024

TREE SURVEY PLAN

Bowland 
 Tree Consultancy Ltd
 e: info@bowlandtreeconsultancy.co.uk
 t: 01773 437160

DISCLAIMER

Survey Limitations: Unless otherwise stated all trees are viewed from ground level using non-invasive techniques. The disclosure of hidden crown and stem defects, in particular where they may be above a reachable height or where trees are ivy clad or in areas of ground vegetation, cannot therefore be expected. All obvious defects, however, are reported. Where the QTRA Risk Index is calculated as Tolerable or Broadly Acceptable, but the tree(s) have not been adequately inspected (e.g. due to the presence of ivy and/or ground vegetation which impeded the inspection), then it is essential to follow the recommendations made in the Management Recommendations column and to have the applicable tree(s) re-inspected as recommended.

Detailed tree safety appraisals are only carried out under specific written instructions. Comments upon evident tree safety relate to the condition of said tree at the time of the survey only. The level of detail of the survey is as per the brief detailed on the Tree Survey Schedule and as per the specifics set out in the associated fee estimate for the project.

Unless otherwise stated all trees should be re-inspected annually in order to appraise their on-going mechanical integrity and physiological condition. It should, however, be recognised that tree condition is subject to change, for example due to the effects of disease, decay, high winds, development works, etc. Changes in land use or site conditions (e.g. development that increases access frequency) and the occurrence of severe weather incidents are also significant considerations with regards tree structural integrity and trees should therefore be re-assessed in the context of such changes and/or incidents and inspected at intervals relative to identified and varying site conditions and associated risks.

Where trees are located wholly or partially on neighbouring private third-party land then said land is not accessed and our inspection is therefore restricted to what can reasonably be seen from within the site. Any subsequent comments and judgments made in respect of such trees are based on these restrictions and are our preliminary opinion only. Recommendations for works to neighbouring third-party trees are only made where a potentially unacceptable risk to persons and/or property has been identified during our survey. Where significant structural defects of third-party trees are identified and associated management works are considered essential to negate any risk of harm and/or damage then we will first attempt to inform the site occupier of the issues and, if not possible, then inform the relevant Council. Where a more detailed assessment is considered necessary then appropriate recommendations are set out in the Tree Survey Schedule.

The potential influence of trees upon existing or proposed buildings or other structures, resulting from the effects of their roots abstracting water from shrinkable load-bearing soils, is not considered herein.

Copyright & Non-Disclosure Notice: The content and layout of this report are subject to copyright owned by Bowland Tree Consultancy Ltd, save to the extent that copyright has been legally assigned to us by another party or is used by Bowland Tree Consultancy Ltd under license. The report remains the property of Bowland Tree Consultancy Ltd until such time as payment in full for the services conducted as per the contract of Bowland Tree Consultancy Ltd's appointment has been compensated. The report may not be copied or used without our prior written agreement for any purpose other than those indicated. Unauthorised reproduction or usage of the report by any person is prohibited.

Third Parties: Any disclosure of this document to a third party is subject to this disclaimer. The report was prepared by Bowland Tree Consultancy Ltd at the instruction of and for use by our client, as named. This report does not in any way constitute advice to any third party who is able to access it by any means. Bowland Tree Consultancy Ltd excludes to the fullest extent lawfully permitted all liability whatsoever for any loss or damage arising from reliance on the contents of this report.

Statutory Tree Protection: It is the client's responsibility to check for the presence of any statutory tree protection measures, such as the site's location within a Conservation Area and/or the presence of any Tree Preservation Orders, directly with the applicable Council's planning department prior to scheduling or carrying out any tree works. In turn, it is also the client's responsibility to check for the need for a felling licence with the Forestry Commission prior to scheduling or carrying out any tree works. Bowland Tree Consultancy Ltd cannot be held responsible for any decisions made by the client to prune or remove trees where any such statutory protection exists.

Liability: This report was prepared for the sole use of 'The Client' and, where applicable, the client's 'Agent', in accordance with the agreement under which the services were instructed. No warranty, express or implied, is made as to the advice in this report or any other service provided by Bowland Tree Consultancy Ltd. This report may not be relied upon by any other party except the client or any third party for whom the report is intended without the prior written permission of Bowland Tree Consultancy Ltd. The content of this report is, at least in part, based upon information provided by secondary data sources and on the assumption that all relevant information has been provided by those parties from whom it has been requested. Information obtained from any third party has not been independently verified by Bowland Tree Consultancy Ltd, unless otherwise stated in the report.

Validity: The findings and recommendations contained within this report are, providing its recommendations are observed and the site conditions are retained as per the date(s) of the survey, valid for a period of twelve months from the last survey date. This period of validity may be reduced should there be any changes in factors affecting both the surrounding environment and/or built structures in relative proximity to the trees. The condition of trees should be re-appraised directly, through a site survey, following major weather events such as storms, changes undertaken to the site's conditions, inclusive of demolition and/or ground works, or the removal of existing site vegetation, including trees.



Quantified Tree Risk Assessment

Simply Balancing Risks With Benefits



Quantified Tree Risk Assessment

PRACTICE NOTE

VERSION 5



Quantified Tree Risk Assessment Practice Note

"When you can measure what you are speaking about, and express it in numbers, you know something about it; but when you cannot measure it, when you cannot express it in numbers, your knowledge is of a meagre and unsatisfactory kind"

William Thomson, Lord Kelvin, Popular Lectures and Addresses [1891-1894]

1. INTRODUCTION

Every day we encounter risks in all of our activities, and the way we manage those risks is to make choices. We weigh up the costs and benefits of the risk to determine whether it is acceptable, unacceptable, or tolerable. For example, if you want to travel by car you must accept that even with all the extensive risk control measures, such as seat-belts, speed limits, airbags, and crash barriers, there is still a significant risk of death. This is an everyday risk that is taken for granted and tolerated by millions of people in return for the benefits of convenient travel. Managing trees should take a similarly balanced approach.

A risk from falling trees exists only if there is both potential for tree failure and potential for harm to result. The job of the risk assessor is to consider the likelihood and consequences of tree failure. The outcome of this assessment can then inform consideration of the risk by the tree manager, who may also be the owner.

Using a comprehensive range of values¹, Quantified Tree Risk Assessment (QTRA) enables the tree assessor to identify and analyse the risk from tree failure in three key stages. 1) to consider land-use in terms of vulnerability to impact and likelihood of occupation, 2) to consider the consequences of an impact, taking account of the size of the tree or branch concerned, and 3) to estimate the probability that the tree or branch will fail onto the land-use in question. Estimating the values of these components, the assessor can use the QTRA manual calculator or software application to calculate an annual Risk of Harm from a particular tree. To inform management decisions, the risks from different hazards can then be both ranked and compared, and considered against broadly acceptable and tolerable levels of risk.

A Proportionate Approach to Risks from Trees

The risks from falling trees are usually very low and high risks will usually be encountered only in areas with either high levels of human occupation or with valuable property. Where levels of human occupation and value of property are sufficiently low, the

assessment of trees for structural weakness will not usually be necessary. Even when land-use indicates that the assessment of trees is appropriate, it is seldom proportionate to assess and evaluate the risk for each individual tree in a population. Often, all that is required is a brief consideration of the trees to identify gross signs of structural weakness or declining health. Doing all that is reasonably practicable does not mean that all trees have to be individually examined on a regular basis (HSE 2013).

The QTRA method enables a range of approaches from the broad assessment of large collections of trees to, where necessary, the detailed assessment of an individual tree.

Risk of Harm

The QTRA output is termed the Risk of Harm and is a combined measure of the likelihood and consequences of tree failure, considered against the baseline of a lost human life within the coming year.

ALARP (As Low As Reasonably Practicable)

Determining that risks have been reduced to As Low As Reasonably Practicable (HSE 2001) involves an evaluation of both the risk and the sacrifice or cost involved in reducing that risk. If it can be demonstrated that there is gross disproportion between them, the risk being insignificant in relation to the sacrifice or cost, then to reduce the risk further is not 'reasonably practicable'.

Costs and Benefits of Risk Control

Trees confer many benefits to people and the wider environment. When managing any risk, it is essential to maintain a balance between the costs and benefits of risk reduction, which should be considered in the determination of ALARP. It is not only the financial cost of controlling the risk that should be considered, but also the loss of tree-related benefits, and the risk to workers and the public from the risk control measure itself.

When considering risks from falling trees, the cost of risk control will usually be too high when it is clearly 'disproportionate' to the reduction in risk. In the

¹ See Tables 1, 2 & 3.

context of QTRA, the issue of 'gross disproportion'², where decisions are heavily biased in favour of safety, is only likely to be considered where there are risks of 1/10 000 or greater.

Acceptable and Tolerable Risks

The Tolerability of Risk framework (ToR) (HSE 2001) is a widely accepted approach to reaching decisions on whether risks are broadly acceptable, unacceptable, or tolerable. Graphically represented in Figure 1, ToR can be summarised as having a Broadly Acceptable Region where the upper limit is an annual risk of death 1/1 000 000, an Unacceptable Region for which the lower limit is 1/1 000, and between these a Tolerable Region within which the tolerability of a risk will be dependent upon the costs and benefits of risk reduction. In the Tolerable Region, we must ask whether the benefits of risk control are sufficient to justify their cost.

In respect of trees, some risks cross the Broadly Acceptable 1/1 000 000 boundary, but remain tolerable. This is because any further reduction would involve a disproportionate cost in terms of the lost environmental, visual, and other benefits, in addition to the financial cost of controlling the risk.

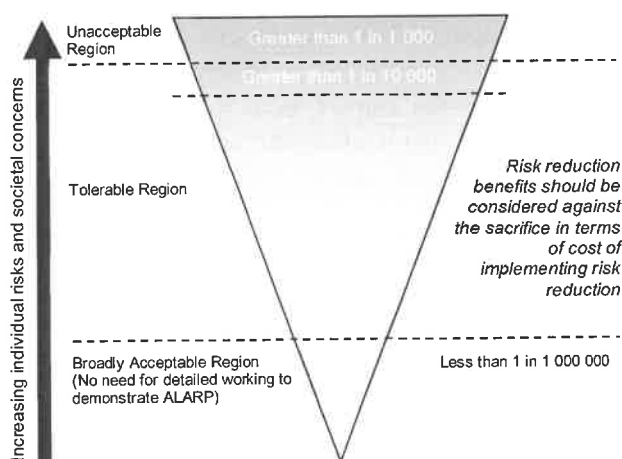


Figure 1. Adapted from the Tolerability of Risk framework (HSE 2001).

Value of Statistical Life

The Value of Statistical Life (VOSL), is a widely applied risk management device, which uses the value of a hypothetical life to guide the proportionate allocation of resources to risk reduction. In the UK, this value is currently in the region of £2 000 000, and this is the value adopted in the QTRA method.

In QTRA, placing a statistical value on a human life has two particular uses. Firstly, QTRA uses VOSL to

enable damage to property to be compared with the loss of life, allowing the comparison of risks to people and property. Secondly, the proportionate allocation of financial resources to risk reduction can be informed by VOSL. "A value of statistical life of £1 000 000 is just another way of saying that a reduction in risk of death of 1/100 000 per year has a value of £10 per year" (HSE 1996).

Internationally, there is variation in VOSL, but to provide consistency in QTRA outputs, it is suggested that VOSL of £2 000 000 should be applied internationally. This is ultimately a decision for the tree manager.

2. OWNERSHIP OF RISK

Where many people are exposed to a risk, it is shared between them. Where only one person is exposed, that individual is the recipient of all of the risk and if they have control over it, they are also the owner of the risk. An individual may choose to accept or reject any particular risk to themselves, when that risk is under their control. When risks that are imposed upon others become elevated, societal concern will usually require risk controls, which ultimately are imposed by the courts or government regulators.

Although QTRA outputs might occasionally relate to an individual recipient, this is seldom the case. More often, calculation of the Risk of Harm is based on a cumulative occupation – i.e. the number of people per hour or vehicles per day, without attempting to identify the individuals who share the risk.

Where the risk of harm relates to a specific individual or a known group of people, the risk manager might consider the views of those who are exposed to the risk when making management decisions. Where a risk is imposed on the wider community, the principles set out in the ToR framework can be used as a reasonable approach to determine whether the risk is ALARP.

3. THE QTRA METHOD - VERSION 5

The input values for the three components of the QTRA calculation are set out in broad ranges³ of Target, Size, and Probability of Failure. The assessor estimates values for these three components and inputs them on either the manual calculator or software application to calculate the Risk of Harm.

² Discussed further on page 5.

³ See Tables 1, 2 & 3.

Assessing Land-use (Targets)

The nature of the land-use beneath or adjacent to a tree will usually inform the level and extent of risk assessment to be carried out. In the assessment of Targets, six ranges of value are available. Table 2 sets out these ranges for vehicular frequency, human occupation and the monetary value of damage to property.

Human Occupation

The probability of pedestrian occupation at a particular location is calculated on the basis that an average pedestrian will spend five seconds walking beneath an average tree. For example, an average occupation of ten pedestrians per day, each occupying the Target for five seconds is a daily occupation of fifty seconds, giving a likelihood of occupation 1/1,728. Where a longer occupation is likely, as with a habitable building, outdoor café, or park bench, the period of occupation can be measured, or estimated as a proportion of a given unit of time, e.g. six hours per day (1/4). The Target is recorded as a range (Table 2).

Weather Affected Targets

Often the nature of a structural weakness in a tree is such that the probability of failure is greatest during windy weather, while the probability of the site being occupied by people during such weather is often low. This applies particularly to outdoor recreational areas. When estimating human Targets, the risk assessor must answer the question 'in the weather conditions that I expect the likelihood of failure of the tree to be initiated, what is my estimate of human occupation?' Taking this approach, rather than using the average occupation, ensures that the assessor considers the relationship between weather, people, and trees, along with the nature of the average person with their ability to recognise and avoid unnecessary risks.

Vehicles on the Highway

In the case of vehicles, likelihood of occupation may relate to either the falling tree or branch striking the vehicle or the vehicle striking the fallen tree. Both types of impact are influenced by vehicle speed; the faster the vehicle travels the less likely it is to be struck by the falling tree, but the more likely it is to strike a fallen tree. The probability of a vehicle occupying any particular point in the road is the ratio of the time it is occupied - including a safe stopping distance - to the total time. The average vehicle on a UK road is occupied by 1.6 people (DfT 2010). To account for the substantial protection that the average vehicle provides against most tree impacts and in particular, frontal collisions, QTRA values the substantially

protected 1.6 occupants in addition to the value of the vehicle as equivalent to one exposed human life.

Property

Table 1. Size

Size Range	Size of tree or branch	Range of Probability
1	> 450mm (>18") dia.	1/1 - >1/2
2	260mm (10½") dia. - 450mm (18") dia.	1/2 - >1/8.6
3	110mm (4½") dia. - 250mm (10") dia.	1/8.6 - >1/82
4	25mm (1") dia. - 100mm (4") dia.	1/82 - 1/2.500

* Range 1 is based on a diameter of 600mm.

Property can be anything that could be damaged by a falling tree, from a dwelling, to livestock, parked car, or fence. When evaluating the exposure of property to tree failure, the QTRA assessment considers the cost of repair or replacement that might result from failure of the tree. Ranges of value are presented in Table 2 and the assessor's estimate need only be sufficient to determine which of the six ranges the cost to select.

In Table 2, the ranges of property value are based on a VOSL of £2 000 000, e.g. where a building with a replacement cost of £20 000 would be valued at 0.01 (1/100) of a life (Target Range 2).

When assessing risks in relation to buildings, the Target to be considered might be the building, the occupants, or both. Occupants of a building could be protected from harm by the structure or substantially exposed to the impact from a falling tree if the structure is not sufficiently robust, and this will determine how the assessor categorises the Target.

Multiple Targets

A Target might be constantly occupied by more than one person and QTRA can account for this. For example, if it is projected that the average occupation will be constant by 10 people, the Risk of Harm is calculated in relation to one person constantly occupying the Target before going on to identify that the average occupation is 10 people. This is expressed as Target 1(10T)/1, where 10T represents the Multiple Targets. In respect of property, a Risk of Harm 1(10T)/1 would be equivalent to a risk of losing £20 000 000 as opposed to £2 000 000.

Tree or Branch Size

A small dead branch of less than 25mm diameter is not likely to cause significant harm even in the case of direct contact with a Target, while a falling branch with a diameter greater than 450mm is likely to cause some harm in the event of contact with all but the most robust Target. The QTRA method categorises

Size by the diameter of tree stems and branches (measured beyond any basal taper). An equation derived from weight measurements of trees of different stem diameters is used to produce a data set of comparative weights of trees and branches ranging from 25mm to 600mm diameter, from which Table 1 is compiled. The size of dead branches might be

discounted where they have undergone a significant reduction in weight because of degradation and shedding of subordinate branches. This discounting, referred to as 'Reduced Mass', reflects an estimated reduction in the mass of a dead branch.

Table 2. Targets

Target Range	Property (repair or replacement cost)	Human (not in vehicles)	Vehicle Traffic (number per day)	Ranges of Value (probability of occupation or fraction of £2 000 000)
1	£2 000 000 – >£200 000	Occupation: Constant – 2.5 hours/day Pedestrians & cyclists: 720/hour – 73/hour	26 000 – 2 700 @ 110kph (68mph) 32 000 – 3 300 @ 80kph (50mph) 47 000 – 4 800 @ 50kph (32mph)	1/1 – >1/10
2	£200 000 – >£20 000	Occupation: 2.4 hours/day – 15 min/day Pedestrians & cyclists: 72/hour – 8/hour	2 600 – 270 @ 110kph (68mph) 3 200 – 330 @ 80kph (50mph) 4 700 – 480 @ 50kph (32mph)	1/10 – >1/100
3	£20 000 – >£2 000	Occupation: 14 min/day – 2 min/day Pedestrians & cyclists: 7/hour – 2/hour	260 – 27 @ 110kph (68mph) 320 – 33 @ 80kph (50mph) 470 – 48 @ 50kph (32mph)	1/100 – >1/1 000
4	£2 000 – >£200	Occupation: 1 min/day – 2 min/week Pedestrians & cyclists: 1/hour – 3/day	26 – 4 @ 110kph (68mph) 32 – 4 @ 80kph (50mph) 47 – 6 @ 50kph (32mph)	1/1 000 – >1/10 000
5	£200 – >£20	Occupation: 1 min/week – 1 min/month Pedestrians & cyclists: 2/day – 2/week	3 – 1 @ 110kph (68mph) 3 – 1 @ 80kph (50mph) 5 – 1 @ 50kph (32mph)	1/10 000 – >1/100 000
6	£20 – £2	Occupation: <1 min/month – 0.5 min/year Pedestrians & cyclists: 1/week – 6/year	None	1/100 000 – 1/1 000 000

Vehicle, pedestrian and property Targets are categorised by their frequency of use or their monetary value. The probability of a vehicle or pedestrian occupying a Target area in Target Range 4 is between the upper and lower limits of 1/1 000 and >1/10 000 (column 5). Using the VOSL £2 000 000, the property repair or replacement value for Target Range 4 is £2 000 - >200.

Probability of Failure

In the QTRA assessment, the probability of tree or branch failure within the coming year is estimated and recorded as a range of value (Ranges 1 – 7, Table 3).

Selecting a Probability of Failure (PoF) Range requires the assessor to compare their assessment of the tree or branch against a benchmark of either a non-compromised tree at Probability of Failure Range 7, or a tree or branch that we expect to fail within the year, which can be described as having a 1/1 probability of failure.

During QTRA training, Registered Users go through a number of field exercises in order to calibrate their estimates of Probability of Failure.

Table 3. Probability of Failure

Probability of Failure Range	Probability
1	1/1 - >1/10
2	1/10 - >1/100
3	1/100 - >1/1 000
4	1/1 000 - >1/10 000
5	1/10 000 - >1/100 000
6	1/100 000 - >1/1 000 000
7	1/1 000 000 - 1/1 000 000

The probability that the tree or branch will fail within the coming year.

The QTRA Calculation

The assessor selects a Range of values for each of the three input components of Target, Size and Probability of Failure. The Ranges are entered on either the manual calculator or software application to calculate a Risk of Harm.

The Risk of Harm is expressed as a probability and is rounded, to one significant figure. Any Risk of Harm

that is lower than 1/1 000 000 is represented as <1/1 000 000. As a visual aid, the Risk of Harm is colour coded using the traffic light system illustrated in Table 4 (page 7).

Risk of Harm - Monte Carlo Simulations

The Risk of Harm for all combinations of Target, Size and Probability of Failure Ranges has been calculated using Monte Carlo simulations⁴. The QTRA Risk of Harm is the mean value from each set of Monte Carlo results.

In QTRA Version 5, the Risk of Harm should not be calculated without the manual calculator or software application.

Assessing Groups and Populations of Trees

When assessing populations or groups of trees, the highest risk in the group is quantified and if that risk is tolerable, it follows that risks from the remaining trees will also be tolerable, and further calculations are unnecessary. Where the risk is intolerable, the next highest risk will be quantified, and so on until a tolerable risk is established. This process requires prior knowledge of the tree manager's risk tolerance.

Accuracy of Outputs

The purpose of QTRA is not necessarily to provide high degrees of accuracy, but to provide for the quantification of risks from falling trees in a way that risks are categorised within broad ranges (Table 4).

4. INFORMING MANAGEMENT DECISIONS

Balancing Costs and Benefits of Risk Control

When controlling risks from falling trees, the benefit of reduced risk is obvious, but the costs of risk control are all too often neglected. For every risk reduced there will be costs, and the most obvious of these is the financial cost of implementing the control measure. Frequently overlooked is the transfer of risks to workers and the public who might be directly affected by the removal or pruning of trees. Perhaps more importantly, most trees confer benefits, the loss of which should be considered as a cost when balancing the costs and benefits of risk control.

When balancing risk management decisions using QTRA, consideration of the benefits from trees will usually be of a very general nature and not require detailed consideration. The tree manager can consider, in simple terms, whether the overall cost of risk control is a proportionate one. Where risks are

approaching 1/10 000, this may be a straightforward balancing of cost and benefits. Where risks are 1/10 000 or greater, it will usually be appropriate to implement risk controls unless the costs are grossly disproportionate to the benefits rather than simply disproportionate. In other words, the balance being weighted more on the side of risk control with higher associated costs.

Considering the Value of Trees

It is necessary to consider the benefits provided by trees, but they cannot easily be monetised and it is often difficult to place a value on those attributes such as habitat, shading and visual amenity that might be lost to risk control.

A simple approach to considering the value of a tree asset is suggested here, using the concept of 'average benefits'. When considered against other similar trees, a tree providing 'average benefits' will usually present a range of benefits that are typical for the species, age and situation. Viewed in this way, a tree providing 'average benefits' might appear to be low when compared with particularly important trees – such as in Figure 2, but should nonetheless be sufficient to offset a Risk of Harm of less than 1/10 000. Without having to consider the benefits of risk controls, we might reasonably assume that below 1/10 000, the risk from a tree that provides 'average benefits' is ALARP.

In contrast, if it can be said that the tree provides lower than average benefits because, for example, it is declining and in poor physiological condition, it may be necessary to consider two further elements. Firstly, is the Risk of Harm in the upper part of the Tolerable Region, and secondly, is the Risk of Harm likely to increase before the next review because of an increased Probability of Failure. If both these conditions apply then it might be appropriate to consider the balance of costs and benefits of risk reduction in order to determine whether the risk is ALARP. This balance requires the tree manager to take a view of both the reduction in risk and the costs of that reduction.

⁴ For further information on the Monte Carlo simulation method, refer to http://en.wikipedia.org/wiki/Monte_Carlo_method



Lower Than Average Benefits from Trees

Usually, the benefits provided by a tree will only be significantly reduced below the 'average benefits' that are typical for the species, age and situation, if the life of the benefits is likely to be shortened, perhaps because the tree is declining or dead. That is not to say that a disbenefit, such as undesirable shading, lifting of a footpath, or restricting the growth of other trees, should not also be considered in the balance of costs and benefits.

The horse chestnut tree in Figure 3 has recently died, and over the next few years, may provide valuable habitats. However, for this tree species and the relatively fast rate at which its wood decays, the lifetime of these benefits is likely to be limited to only a few years. This tree has an already reduced value that will continue to reduce rapidly over the coming five to ten years at the same time as the Risk of Harm is expected to increase. There will be changes in the benefits provided by the tree as it degrades. Visual qualities are likely to reduce while the decaying wood provides habitats for a range of species, for a short while at least. There are no hard and fast measures of these benefits and it is for the tree manager to decide what is locally important and how it might be balanced with the risks.

Where a risk is within the Tolerable Region and the tree confers lower than average benefits, it might be appropriate to consider implementing risk control while taking account of the financial cost. Here, VOSL can be used to inform a decision on whether the cost of risk control is proportionate. Example 3 below puts this evaluation into a tree management context.

There will be occasions when a tree is of such minimal value and the monetary cost of risk reduction so low that it might be reasonable to further reduce an

already relatively low risk. Conversely, a tree might be of such considerable value that an annual risk of death greater than 1/10 000 would be deemed tolerable.

Occasionally, decisions will be made to retain elevated risks because the benefits from the tree are particularly high or important to stakeholders, and in these situations, it might be appropriate to assess and document the benefits in some detail. If detailed assessment of benefits is required, there are several methodologies and sources of information (Forest Research 2010).

Delegating Risk Management Decisions



Understanding of the costs with which risk reduction is balanced can be informed by the risk assessor's knowledge, experience and on-site observations, but the risk management decisions should be made by the tree manager. That is not to say that the tree manager should review and agree every risk control measure, but when delegating decisions to surveyors and other staff or advisors, tree managers should set out in a policy, statement or contract, the principles and perhaps thresholds to which trees and their associated risks will ordinarily be managed.

Based on the tree manager accepting the principles set out in the QTRA Practice Note and or any other specific instructions, the risk assessor can take account of the cost/benefit balance and for most situations will

be able to determine whether the risk is ALARP when providing management recommendations.

Table 4. QTRA Advisory Risk Thresholds

Thresholds	Description	Action
1/1,000	Unacceptable Risks will not ordinarily be tolerated	<ul style="list-style-type: none"> Control the risk
	Unacceptable (where imposed on others) Risks will not ordinarily be tolerated	<ul style="list-style-type: none"> Control the risk Review the risk
1/10 000	Tolerable (by agreement) Risks may be tolerated if those exposed to the risk accept it, or the tree has exceptional value	<ul style="list-style-type: none"> Control the risk unless there is broad stakeholder agreement to tolerate it, or the tree has exceptional value Review the risk
	Tolerable (where imposed on others) Risks are tolerable if ALARP	<ul style="list-style-type: none"> Assess costs and benefits of risk control Control the risk only where a significant benefit might be achieved at reasonable cost Review the risk
1/1 000 000	Broadly Acceptable Risk is already ALARP	<ul style="list-style-type: none"> No action currently required Review the risk

QTRA Informative Risk Thresholds

The QTRA advisory thresholds in Table 4 are proposed as a reasonable approach to balancing safety from falling trees with the costs of risk reduction. This approach takes account of the widely applied principles of ALARP and ToR, but does not dictate how these principles should be applied. While the thresholds can be the foundation of a robust policy for tree risk management, tree managers should make decisions based on their own situation, values and resources. Importantly, to enable tree assessors to provide appropriate management guidance, it is helpful for them to have some understanding of the tree owner's management preferences prior to assessing the trees.

A Risk of Harm that is less than 1/1 000 000 is Broadly Acceptable and is already ALARP. A Risk of Harm 1/1 000 or greater is unacceptable and will not ordinarily be tolerated. Between these two values, the Risk of Harm is in the Tolerable Region of ToR and will be tolerable if it is ALARP. In the Tolerable Region, management decisions are informed by

consideration of the costs and benefits of risk control, including the nature and extent of those benefits provided by trees, which would be lost to risk control measures.

For the purpose of managing risks from falling trees, the Tolerable Region can be further broken down into two sections. From 1/1 000 000 to less than 1/10 000, the Risk of Harm will usually be tolerable providing that the tree confers 'average benefits' as discussed above. As the Risk of Harm approaches 1/10 000 it will be necessary for the tree manager to consider in more detail the benefits provided by the tree and the overall cost of mitigating the risk.

A Risk of Harm in the Tolerable Region but 1/10 000 or greater will not usually be tolerable where it is imposed on others, such as the public, and if retained, will require a more detailed consideration of ALARP. In exceptional circumstances a tree owner might choose to retain a Risk of Harm that is 1/10 000 or greater. Such a decision might be based on the agreement of those who are exposed to the risk, or perhaps that the tree is of great importance. In these circumstances, the prudent tree manager will consult with the appropriate stakeholders whenever possible.

5. EXAMPLE QTRA CALCULATIONS AND RISK MANAGEMENT DECISIONS

Below are three examples of QTRA calculations and application of the QTRA Advisory Thresholds.

Example 1.

	Target		Size		Probability of Failure		Risk of Harm
Range	6	x	1	x	3	=	<1/1 000 000

Example 1 is the assessment of a large (Size 1), unstable tree with a probability of failure of between 1/100 and >1/1 000 (PoF 3). The Target is a footpath with less than one pedestrian passing the tree each week (Target 6). The Risk of Harm is calculated as less than 1/1 000 000 (green). This is an example of where the Target is so low consideration of the structural condition of even a large tree would not usually be necessary.

Example 2.

	Target	Size	Probability of Failure	Risk of Harm
Range	1	x 4	x 3	= 1(2T)/50 000

In Example 2, a recently dead branch (Size 4) overhangs a busy urban high street that is on average occupied constantly by two people, and here Multiple Target occupation is considered.

Having an average occupancy of two people, the Risk of Harm 1(2T)/50 000 (yellow) represents a twofold increase in the magnitude of the consequence and is therefore equivalent to a Risk of Harm 1/20 000 (yellow). This risk does not exceed 1/10 000, but being a dead branch at the upper end of the Tolerable Region it is appropriate to consider the balance of costs and benefits of risk control. Dead branches can be expected to degrade over time with the probability of failure increasing as a result. Because it is dead, some of the usual benefits from the branch have been lost and it will be appropriate to consider whether the financial cost of risk control would be proportionate.

Example 3.

	Target	Size	Probability of Failure	Risk of Harm
Range	3	x 3	x 3	= 1/500 000

In Example 3, a 200mm diameter defective branch overhangs a country road along which travel between 470 and 48 vehicles each day at an average speed of 50kph (32mph) (Target Range 3). The branch is split and is assessed as having a probability of failure for the coming year of between 1/100 and 1/1 000 (PoF Range 3). The Risk of Harm is calculated as 1/500 000 (yellow) and it needs to be considered whether the risk is ALARP. The cost of removing the branch and reducing the risk to Broadly Acceptable (1/1 000 000) is estimated at £350. To establish whether this is a proportionate cost of risk control, the following equation is applied. £2 000 000 (VOSL) × 1/500 000 = £4 indicating that the projected cost of £350 would be disproportionate to the benefit. Taking account of the financial cost, risk transfer to arborists and passers-by, the cost could be described as being grossly disproportionate, even if accrued benefits over say ten years were taken into account.

References

- DfT. 2000. Highway Economic Note N. 1. 'Valuation of Benefits of Prevention of Road Accidents and Casualties'. Department for Transport.
- DfT. 2010. Department for Transport. *Vehicles Factsheet*. Department for Transport, London. pp. 4. Available for download at <http://www.dft.gov.uk/statistics>
- Forest Research. 2010. *Benefits of green infrastructure - Report by Forest Research*. Forest Research, Farnham, Surrey. 42 pp.
- HSE. 1996. *Use of Risk Assessment Within Government Departments*. Report prepared by the Interdepartmental Liaison Group on Risk Assessment. Health and Safety Executive. HSE Books, Sudbury, Suffolk. 48 pp.
- HSE. 2001. *Reducing Risks: Protecting People*. Health and Safety Executive, [online]. Available for download at <http://www.hse.gov.uk/risk/theory/r2p2.pdf> (accessed 05/11/2013).
- HSE. 2013. *Sector Information Minute - Management of the risk from falling trees or branches*. Health & Safety Executive, Bootle, [online]. Available for download at http://www.hse.gov.uk/foi/internalops/sims/ag_food/010705.htm (accessed 05/11/2013).
- ISO. 2009. ISO Guide 73. *Risk Management Vocabulary*. International Organization for Standardization. Geneva. 17 pp.
- Tritton, L. M. and Hornbeck, J. W. 1982. *Biomass Equations for Major Tree Species*. General Technical Report NE69. United States Department of Agriculture.

Revision 5.2.4. Monetary values for non-uk versions updated at 1st January 2019.

© 2019. Published by
Quantified Tree Risk Assessment Limited.
9 Lowe Street, Macclesfield, Cheshire,
SK11 7NJ, United Kingdom.

