



# **Arboricultural Constraints Appraisal**

in Relation to Proposed 'Paragraph 80'  
Isolated Residential Development at



**Land off Higher Lane, Longridge,  
Lancashire, PR3 2YX**

Prepared by:

**Bowland**   
Tree Consultancy Ltd

April 2024

# ARBORICULTURAL CONSTRAINTS APPRAISAL LAND OFF HIGHER LANE, LONGRIDGE

---

## **CONTENTS**

1. TREE SURVEY SCHEDULE & BS5837: 2012 TABLE 1
2. TEMPORARY PROTECTIVE FENCING SPECIFICATION
3. TREE CONSTRAINTS PLAN



Unit Two  
11 Cannon Street  
Preston  
Lancashire  
PR1 3NR

T: 01772 437150

E: [info@bowlandtreeconsultancy.co.uk](mailto:info@bowlandtreeconsultancy.co.uk)

Ground Floor  
14 Castlegate  
Penrith  
Cumbria  
CA11 7HZ

T: 01768 744450

**ARBORICULTURAL CONSTRAINTS APPRAISAL  
LAND OFF HIGHER LANE, LONGRIDGE**

---

**PROJECT DETAILS**

**Project No.:** BTC2946

**Site:** Land off Higher Lane, Longridge, PR3 2YX

**Agent for Client:** Smith & Love Planning Consultants

**Council:** Ribble Valley Borough Council

**Survey Date:** 09 April 2024

**Surveyed by:** Joseph Lambert BSc (Hons) FdSc MArborA MICFor

**Prepared by:** Joseph Lambert BSc (Hons) FdSc MArborA MICFor

**Checked by:** Ryan Wilson BSc(Hons) FdSc MArborA

**Date of Issue:** 18 April 2024

**Version No:** 1

## **DISCLAIMER**

**Survey Limitations:** Unless otherwise stated all trees are surveyed from ground level using non-invasive techniques. The disclosure of hidden crown and stem defects, in particular where they may be above a reachable height or where trees are ivy clad or in areas of ground vegetation, cannot therefore be expected. All obvious defects, however, are reported. Detailed tree safety appraisals are only carried out under specific written instructions. Comments upon evident tree safety relate to the condition of said tree at the time of the survey only.

Unless otherwise stated all trees should be re-inspected annually in order to appraise their on-going mechanical integrity and physiological condition. It should, however, be recognised that tree condition is subject to change, for example due to the effects of disease, decay, high winds, development works, etc. Changes in land use or site conditions (e.g. development that increases access frequency) and the occurrence of severe weather incidents are also significant considerations with regards tree structural integrity and trees should therefore be re-assessed in the context of such changes and/or incidents and inspected at intervals relative to identified and varying site conditions and associated risks.

Where trees are located wholly or partially on neighbouring private third-party land then said land is not accessed and our inspection is therefore restricted to what can reasonably be seen from within the site. Stem diameters of trees located on such land are estimated. Any subsequent comments and judgments made in respect of such trees are based on these restrictions and are our preliminary opinion only. Recommendations for works to neighbouring third-party trees are only made where a potentially unacceptable risk to persons and/or property has been identified during our survey. Where significant structural defects of third-party trees are identified and associated management works are considered essential to negate any risk of harm and/or damage then we will first attempt to inform the site occupier of the issues and, if not possible, then inform the relevant Council. Where a more detailed assessment is considered necessary then appropriate recommendations are set out in the Tree Survey Schedule.

Where tree stem locations are not included on the plan(s) provided then they are plotted at the time of the survey using, where appropriate and/or practicable, a combination of measurement triangulation and GPS co-ordination. Where this is not possible then locations are estimated. Restrictions in these respects are detailed in the report.

The tree survey and any report information provided is intended as a guide to identify key tree related constraints to site development only. As such, the potential influence of trees upon existing or proposed buildings or other structures resulting from the effects of their roots abstracting water from shrinkable load-bearing soils is not considered herein. The tree survey information in its current form should not therefore be considered sufficient to determine appropriate foundation depths for new buildings. Accordingly, an updated survey, with reference to the current NHBC Standards Chapter 4.2 - Building Near Trees, must therefore be prepared for the specific purpose of informing suitable foundation depths subsequent to planning approval being granted. The advice of a structural engineer must also be sought with regard to appropriate foundation depths for new buildings.

**Copyright & Non-Disclosure Notice:** The content and layout of this report are subject to copyright owned by Bowland Tree Consultancy Ltd, save to the extent that copyright has been legally assigned to us by another party or is used by Bowland Tree Consultancy Ltd under license. The report remains the property of Bowland Tree Consultancy Ltd until such time as payment in full for the services conducted as per the contract of Bowland Tree Consultancy Ltd's appointment has been compensated. The report may not be copied or used without our prior written agreement for any purpose other than those indicated. Unauthorised reproduction or usage of the report by any person is prohibited.

**Third Parties:** Any disclosure of this document to a third party is subject to this disclaimer. The report was prepared by Bowland Tree Consultancy Ltd at the instruction of and for use by our client, as named. This report does not in any way constitute advice to any third party who is able to access it by any means. Bowland Tree Consultancy Ltd excludes to the fullest extent lawfully permitted all liability whatsoever for any loss or damage arising from reliance on the contents of this report.

**Statutory Tree Protection:** It is the client's responsibility to check for the presence of any statutory tree protection measures, such as the site's location within a Conservation Area and/or the presence of any Tree Preservation Orders, directly with the applicable Council's planning department prior to scheduling or carrying out any tree works. In turn, it is also the client's responsibility to check for the need for a felling licence with the Forestry Commission prior to scheduling or carrying out any tree works. Bowland Tree Consultancy Ltd cannot be held responsible for any decisions made by the client to prune or remove trees where any such statutory protection exists.

**Liability:** This report was prepared for the sole use of 'The Client' and, where applicable, the client's 'Agent', in accordance with the agreement under which the services were instructed. No warranty, express or implied, is made as to the advice in this report or any other service provided by Bowland Tree Consultancy Ltd. This report may not be relied upon by any other party except the client or any third party for whom the report is intended without the prior written permission of Bowland Tree Consultancy Ltd. The content of this report is, at least in part, based upon information provided by secondary data sources and on the assumption that all relevant information has been provided by those parties from whom it has been requested. Information obtained from any third party has not been independently verified by Bowland Tree Consultancy Ltd, unless otherwise stated in the report.

**Validity:** The findings and recommendations contained within this report are, providing its recommendations are observed and the site conditions are retained as per the date(s) of the survey, valid for a period of twelve months from the last survey date. This period of validity may be reduced should there be any changes in factors affecting both the surrounding environment and/or built structures in relative proximity to the trees. The condition of trees should be re-appraised directly, through a site survey, following major weather events such as storms, changes undertaken to the site's conditions, inclusive of demolition and/or ground works, or the removal of existing site vegetation, including trees.

TREE SURVEY SCHEDULE FOR ARBORICULTURAL CONSTRAINTS APPRAISAL							
<b>Site:</b>	Land off Higher Lane, Longridge, Lancashire, PR3 2YX						
<b>Agent:</b>	Smith & Love Planning Consultants						

<b>Surveyor:</b>	Joseph Lambert Chartered Arboriculturist
<b>Survey Date:</b>	09 April 2024
<b>Job Reference:</b>	BTC2946

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m <sup>2</sup> )	RPA Radius (m)
T1	Common Oak	16	640#	N 6.5 E 6.5 S 6.5 W 5.5	2.5-S 0.5	M	G	<ul style="list-style-type: none"> <li>Location in hedge impeded access to inspect stem base and subsequently viewed from field.</li> <li>No significant visible defects noted at time of survey.</li> </ul>		40+	A1/2	185	7.68
T2	Common Oak	16.5	800	N 7 E 6.5 S 6.5 W 6	3 0.5	M	G	<ul style="list-style-type: none"> <li>Location in hedge impeded access to inspect stem base and subsequently viewed from field.</li> <li>No significant visible defects noted at time of survey.</li> </ul>		40+	A1/2	290	9.6
T3	Common Oak	14.5	950#	N 8 E 8.5 S 8 W 9	2.5 1.5	M	M	<ul style="list-style-type: none"> <li>Location in hedge impeded access to inspect stem base and subsequently viewed from field.</li> <li>Canopy moderate sparse, possibly due to root damage from previous hard standing and gate access installed.</li> </ul>	<ul style="list-style-type: none"> <li>Recommend canopy be reviewed during Summer 2024 when next in full leaf to appraise condition.</li> </ul>	20+	B1/2	408	11.4
T4	Common Oak	17.5	820#	N 7.5 E 8.5 S 6.5 W 6.5	4 1.5	M	G	<ul style="list-style-type: none"> <li>Location in hedge impeded access to inspect stem base and viewed from field.</li> <li>No significant visible defects noted at time of survey.</li> <li>Pruning stub on east side at approximately 4m height of approximately 1.5m long and 300mm diameter.</li> </ul>		40+	A1/2	304	9.84
T5	Common Hawthorn	5.5	170#	N 1.5 E 1.5 S 1.5 W 1.5	1.5 1.5	EM-M	M	<ul style="list-style-type: none"> <li>Location in hedge impeded access to inspect stem base and viewed from field.</li> <li>Evidently outgrown part of hedge H1.</li> <li>Moderate to significant reduction in canopy vitality.</li> </ul>		10+	C1	13	2.04
G1	approx. 3no. Common Oak	≤ 15	≤ 460	N ≤ 5 E ≤ 6.5 S ≤ 7.5 W ≤ 5	N/A ≥ 0.5	EM	M	<ul style="list-style-type: none"> <li>Moderate to closely spaced group located in banked hedge.</li> <li>Tree to west has multiple stems from ground level.</li> <li>Low canopy to ground on south side.</li> <li>Moderate deadwood to 90mm diameter.</li> </ul>		20+	B1	≤ 183	≤ 7.64

**Headings and Abbreviations:**

<b>No.</b>	Allocated sequential reference number - Tree ('T'), Group ('G'), Woodland ('W') or Hedge ('H') reference number - refer to plan and to numbered tags where applicable
<b>Species:</b>	Common name
<b>Height:</b>	In metres, to half nearest metre – where possible approximately 80% are measured using an electronic clinometer and the remainder estimated against the measured trees. In the case of Groups and Woodlands the measurement listed is that of the highest tree
<b>Stem Diam.:</b>	Stem diameter in millimetres, to nearest 10mm - measured and calculated as per Annex C of BS5837:2012. MS = multi-stemmed, TS = twin-stemmed
<b>Branch Spread:</b>	Crown radius measured (or estimated where considered appropriate) from the four cardinal points (north, east, south and west) to give an accurate visual representation of the crown
<b>Branch &amp; Canopy Clearances:</b>	Existing height above ground level, in metres, of first significant branch and direction of growth (e.g. 2.5-N) and of canopy at lowest point – to inform on crown to height ratio, potential for shading, etc.
<b>Life Stage:</b>	Estimated age class - Y = young, SM = semi-mature, EM = early-mature, M = mature, PM = post-mature
<b>PC:</b>	Physiological Condition - a measure of the tree(s)' overall vitality, i.e. D = Dead, MD = Moribund, P = Poor, M = Moderate, G = Good
<b>General Observations and Comments:</b>	Comments relating to the tree(s)' overall condition and any other pertinent factors including structural defects, current and potential direct structural damage, physiological decline, poor form, etc.
<b>Management Recommendations:</b>	Either Preliminary or In Consideration of the Proposal - In the case of Arboricultural Constraints Surveys the recommended management works only take existing site and tree circumstances and conditions into account and not proposed developments. Arboricultural Impact Assessment and Method Statement related Surveys take the proposed development into consideration with recommendations made accordingly. More than one option may be given if considered appropriate
<b>ERC:</b>	Estimated Remaining Contribution - in years as per BS5837:2012 (i.e. <10, 10+, 20+, 40+)
<b>Cat. Grade:</b>	Category Grading - tree retention value listed as U, A, B or C - in accordance with BS5837:2012 Table 1
<b>RPA m<sup>2</sup>:</b>	Root Protection Area in m <sup>2</sup> - calculated area around the tree that must be appropriately protected throughout the development process in order avoid root damage
<b>RPA Radius (m):</b>	Root Protection Area Radius - in metres measured from the centre of the stem to the line of tree protection
<b># (Estimated Dimensions):</b>	Where trees are located off-site, or are inaccessible for any other reason, and accurate measurements or other information cannot be taken then the information provided is estimated and is duly suffixed with a "#" symbol

<b>TREE SURVEY SCHEDULE FOR ARBORICULTURAL CONSTRAINTS APPRAISAL</b>	
<b>Site:</b>	Land off Higher Lane, Longridge, Lancashire, PR3 2YX
<b>Agent:</b>	Smith & Love Planning Consultants

<b>Surveyor:</b>	Joseph Lambert Chartered Arboriculturist
<b>Survey Date:</b>	09 April 2024
<b>Job Reference:</b>	BTC2946

No.	Species	Height	Stem Diam.	Branch Spread	Branch & Canopy Clearances	Life Stage	PC	General Observations and Comments	Management Recommendations	ERC	Cat. Grade	RPA (m <sup>2</sup> )	RPA Radius (m)
G2	Common Beech, Elm	≤ 6	≤ 120	N ≤ 2 E ≤ 1.5 S ≤ 2.5 W ≤ 1.5	N/A ≥ 0	SM	G	<ul style="list-style-type: none"> <li>Moderate to closely spaced linear group of outgrown hedge around old tree stump.</li> </ul>		10+	C1	≤ 7	≤ 1.44
W1	Beech, Alder, Ash, Oak, Sycamore, Pine, Larch	≤ 25	≤ 970	N ≤ 13 E ≤ 13 S ≤ 13 W ≤ 13	N/A ≥ 0	M	M-G	<ul style="list-style-type: none"> <li>Mature woodland belt along watercourse and moderately steep west facing bank.</li> <li>Not fully accessed to inspect and largely viewed from field and bank top to west, with some extents estimated.</li> <li>Several Ash showing significant colonisation by Ash Dieback Disease (ADD).</li> <li>Several standing dead stems within to approximately 400mm diameter.</li> <li>Debris to northern edge of woodland and trees slightly smaller in stature.</li> <li>Beech have included primary unions and some primary branch tear outs.</li> </ul>		40+	A1/2	≤ 426	≤ 11.64
H1	Hawthorn	≈ 2.5	N/A	≈ 1.5 wide	N/A	SM	G	<ul style="list-style-type: none"> <li>Mechanically managed hedge along road frontage, previously at about 1.8m high.</li> </ul>		10+	C2	N/A	≈ 1

**BS5837:2012 Table 1 – Cascade Chart for Tree Quality Assessment**

Category and definition	Criteria (including subcategories where appropriate)			Identification on plan
<b>Trees unsuitable for retention</b> (see Note)				
<p><b>Category U</b></p> <p>Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years</p>	<ul style="list-style-type: none"> <li>▪ Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning)</li> <li>▪ Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline</li> <li>▪ Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality</li> </ul> <p><i>Note: Category U trees can have existing or potential conservation value which it might be desirable to preserve; see BS5837:2012 paragraph 4.5.7.</i></p>			Red
<p><b>1. Mainly arboricultural qualities</b></p>		<p><b>2. Mainly landscape qualities</b></p>	<p><b>3. Mainly cultural values, including conservation</b></p>	
<b>Trees to be considered for retention</b>				
<p><b>Category A</b></p> <p><b>Trees of high quality</b> with an estimated remaining life expectancy of at least 40 years</p>	<p>Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant and/or principal trees within an avenue)</p>	<p>Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features</p>	<p>Trees, groups or woodlands of significant conservation, historical, commemorative or other value (e.g. veteran trees or wood-pasture)</p>	Green
<p><b>Category B</b></p> <p>Those of moderate quality and value: those in such a condition as to make a significant contribution. A minimum of 20 years is suggested.</p>	<p>Trees that might be included in the high category, but are downgraded because of impaired condition. Examples include the presence of remediable defects including unsympathetic past management and minor storm damage</p>	<p>Trees present in numbers, usually as groups or woodlands, so they form distinct landscape features which attract a higher collective rating than they might as individuals. But which are not, individually, essential components of formal or semi-formal arboricultural features. For example, trees of moderate quality within an avenue that includes better, A category specimens. Or trees which are internal to the site, therefore individually having little visual impact on the wider locality</p>	<p>Trees with clearly identifiable conservation or other cultural benefits</p>	Blue
<p><b>Category C</b></p> <p>Those trees of low quality and value: currently in adequate condition to remain until new planting could be established - a minimum of 10 years is suggested - or young trees with a stem diameter below 150 mm</p>	<p>Trees not qualifying in higher categories</p>	<p>Trees present in groups or woodlands, but without this conferring on them significantly greater landscape value, and/or trees offering low or only temporary screening benefit</p>	<p>Trees with very limited conservation or other cultural benefits</p>	Grey
	<p>Note – Whilst C category trees will usually not be retained where they would impose a significant constraint on development, young trees with a stem diameter of less than 150mm should be considered for relocation</p>			

## - TEMPORARY PROTECTIVE FENCING SPECIFICATION -

**Construction Exclusion Zones (CEZs)**, enclosed by **Temporary Protective Fencing**, as detailed below and to be agreed with the Local Planning Authority (LPA), shall:

1. be retained in place throughout the development process, as specified in the 'Temporary Protective Fencing Construction' section below and detailed in BS5837:2012 Figure 2 (overleaf);
2. be sited in the area(s) defined by the Root Protection Areas or, if applicable, the Construction Exclusion Zones, as detailed on the associated Tree Plan;
3. be erected prior to any construction, demolition or excavation works and remain in place for the duration of the project;
4. preclude any delivery of site accommodation and/or materials and/or plant machinery;
5. preclude all construction related activity, with the sole exception of specified arboricultural works and any other works to be carried out under supervision that have been agreed by all parties; and
6. preclude the storage of all development related materials and substances including fuels, oils, additives, cement and/or any other deleterious substance.

Any incursion into CEZs must be by prior arrangement, following consultation with the LPA.

### Temporary Protective Fencing Construction

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall butt together and be securely fixed to a scaffold framework, as per 3 to 5 below.
3. The scaffold framework shall comprise of upright poles of at least 3.0 metres in length driven no less than 0.6 metres into the ground at maximum 3.0 metre centres with horizontal and diagonal poles fixed to the uprights, as per 4 to 5 below.
4. The two horizontal rail poles shall be attached to the uprights at heights of 0.6 and 1.8 metres with 3 no. clamps to each joint.
5. The diagonal scaffold pole struts be clamped to the top rail of the scaffold framework at a 45° angle and extend back into the CEZ and clamped to a 0.7 metre length of scaffold tube that shall be driven no less than 0.5m into the ground.
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1, below) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the LPA shall inspect and approve the Temporary Protective Fencing.

Figure 1: CEZ Warning Sign


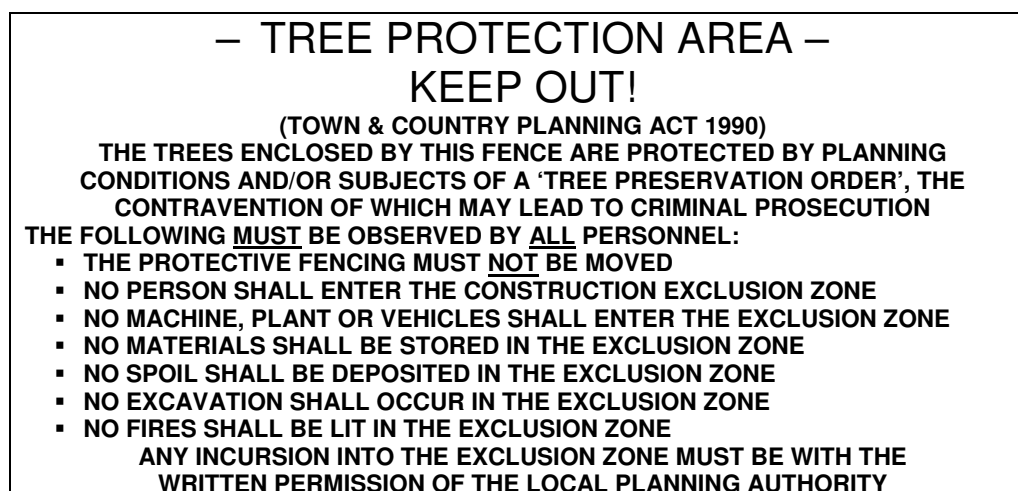



Figure 2: BS5837:2012 Default specification for protective barrier

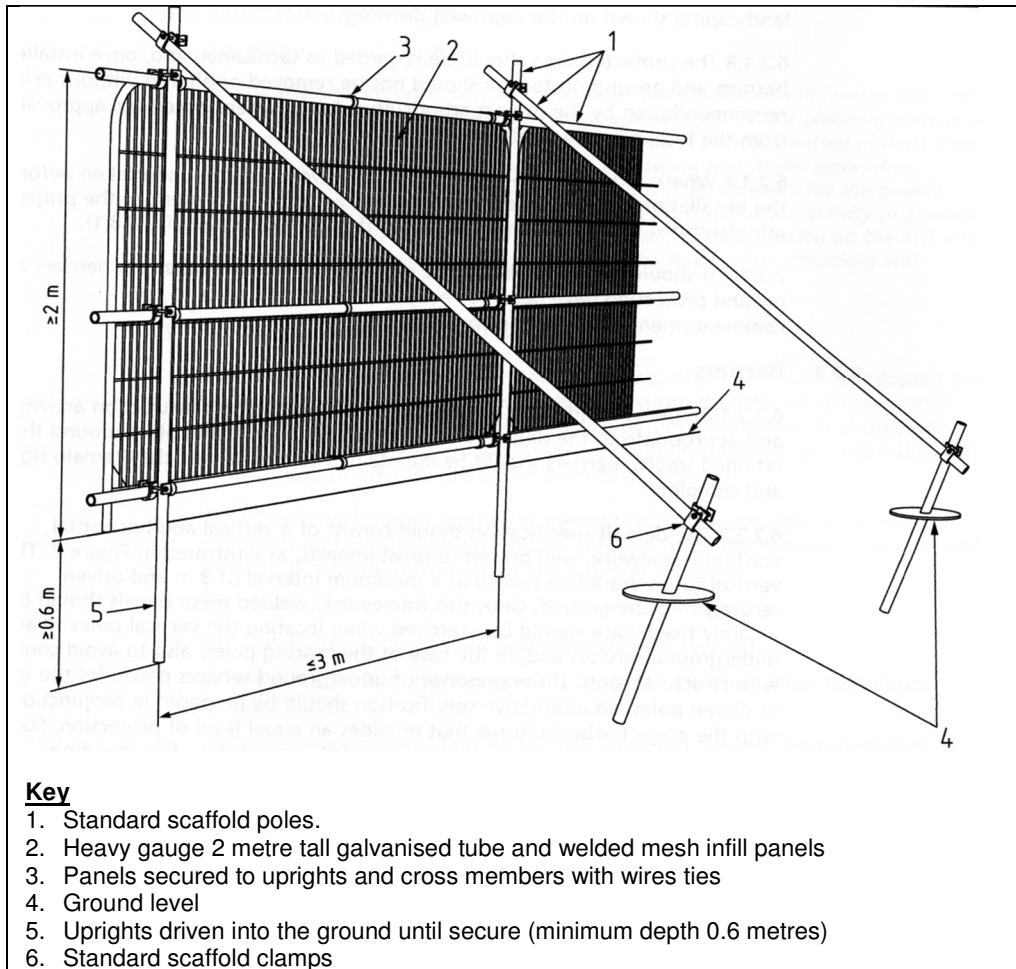


## Temporary Ground Protection

1. Any necessary Temporary Ground Protection areas shall conform to Figure 3, below, unless otherwise agreed with the LPA.
2. The Ground Protection Area shall be left undisturbed and covered by a semi-permeable geotextile membrane which shall, in turn, be covered by a compressible layer consisting of a material such as woodchip.
3. Side-butting scaffold boards shall then be fitted to cover the Ground Protection Area.
4. On completion of installation, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Ground Protection.
5. The Temporary Ground Protection shall remain in place until completion of the project and only removed following receipt of written permission from the LPA.

Figure 3: Temporary Ground Protection – Recommended Construction

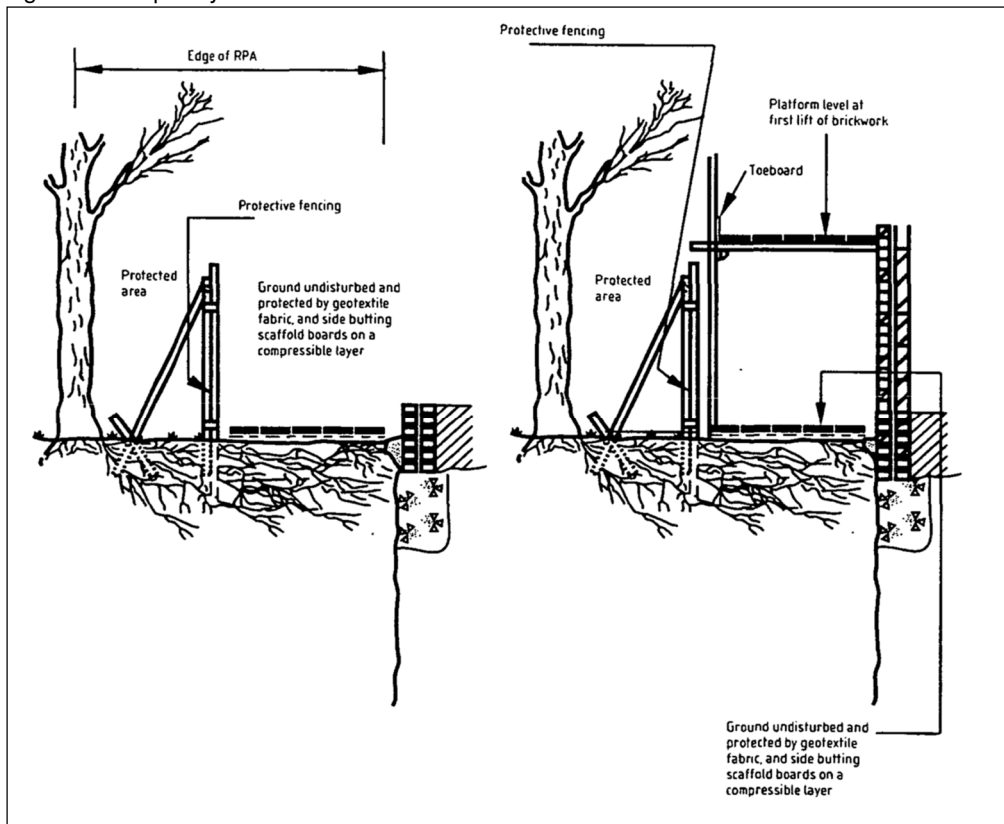



**KEY**

- T = Individual Tree
- G = Group of Trees
- H = Hedge
- W = Woodland

Please refer to associated Tree Survey Schedule and appendices for specific details in respect of items below.

**Tree Categories:**

- Those to be Considered for Retention:
- Category A: Tree/Group/Hedge/Woodland  
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years
  - Category B: Tree/Group/Hedge/Woodland  
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 20 Years
  - Category C: Tree/Group/Hedge/Woodland  
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years or Young Trees

Those Considered Unsuitable for Retention:

- Category D: Tree/Group/Hedge/Woodland  
Those in Such a Condition that they Cannot Reliably be Retained as Living Trees or the Content of the Current Land Use for Longer Than 10 Years

Note: The stem locations and full extents of the group of trees (G), hedge (H) and the woodland (W) were included in the topographical survey plan provided, and were subsequently plotted by the author(s) at the time of the survey using GPS and, where possible, measurement from existing site features as where not possible, estimated. As such, the locations and extents of this group, the hedge and the woodland cannot be considered to be entirely accurate.

**Root Protection Areas (RPAs):**

- RPA: Areas of Ground Around Trees that should be Protected Throughout Development Works with Protective Fencing to Form a Construction Exclusion Zone. See Appended Temporary Protective Fencing Specification.

**Project:**  
LAND OFF HIGHER LANE  
LONGRIDGE  
LANCASHIRE  
PR3 2YX

**Agent for Client:**  
SMITH & LOVE PLANNING  
CONSULTANTS

**Title:**  
**TREE CONSTRAINTS PLAN**  
in Relation to Proposed Paragraph 80 Listed Residential Development

Scale: 1:500@A1  
Date: April 2024  
Drawn by: MJ & JL  
Checked by: JL



Ref: BTC2946-TCP Rev:

© Bowland Tree Consultancy Ltd. The original version of this plan was produced in 2024. This version is intended for the plan's reproduction and quality. As such, a photocopy may differ from the original plan.