

Textured Slabs



SCAN HERE

Stylish granular surface.

Textured Slabs have a modern and natural look that blends beautifully with a variety of other products. Manufactured with a hard-wearing granular surface, these slabs are both stylish and hard-wearing.

- Superb hard-wearing textured surface
- Vibrant long-lasting colours
- Natural appearance

 **PrimeTop®**

 **Ef-Stop®**



Textured

Finish



Pedestrian
Use



Light
Traffic




Commercial
Traffic




BIM
Level 2

Refer to relevant guidance in BS 7533



600 x 600mm



450 x 450mm



400 x 400mm

Sizes



32mm
35mm
40mm
50mm

Depths



Textured Slabs



Specification

 **PrimeTop**  **Ef-Stop**

Product type	Concrete Paving Slab
Manufactured to	BS EN 1339:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m ³ cement
Chamfer	Chamfered
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Bending Strength	Less than 50mm deep Characteristic tensile splitting strength not less than 3.6 MPa 50mm or greater Characteristic tensile splitting strength of >5MPa (Class 3)
Slip/Skid Resistance	Mean polished skid resistance value (PSRV) >45 Mean unpolished skid resistance value (USRV) >45
Installed to	BS 7533-4:2006
NS	Plus Q25 315 Create 45-20-64/395
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test) Class 3
Durability (Freeze-thaw)	≤ 1.0 kg/m ² as a mean with no individual value > 1.5 kg/m ² Class 3
External Fire Performance	Deemed to satisfy when used for roofing
Reaction to fire	Class A1
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 5%
 Carbon Footprint	EPD Verified (2020) 400x400x32mm 8.09kgCo ² e/m ² 400x400x40mm 9.06kgCo ² e/m ² 450x450x35mm 8.72kgCo ² e/m ² 450x450x50mm 12.08kgCo ² e/m ² 600x600x40mm 9.96kgCo ² e/m ² 600x600x50mm 12.09kgCo ² e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
 rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

v1.1

Textured Slabs




Stock


product	size (mm)	edge	colours available	in stock	no. per m ²	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Textured Slabs BIM	600 x 600 x 50	Chamfered	Buff, Natural	YES	2.78	20	20	843	833
	600 x 600 x 40	Chamfered	Buff, Charcoal, Natural	YES	2.78	24	24	850	840
	450 x 450 x 50	Chamfered	Buff, Charcoal, Natural	YES	4.94	20	80	468	468
	450 x 450 x 35	Chamfered	Buff, Charcoal, Natural	YES	4.94	30	60	527	517
	400 x 400 x 40	Chamfered	Charcoal, Golden, Natural	YES	6.25	25	100	410	400
	400 x 400 x 32	Chamfered	Charcoal, Golden, Natural	YES	6.25	30	120	402	392

BIM - This product is available to download from our website in BIM Level 2 format.


Natural

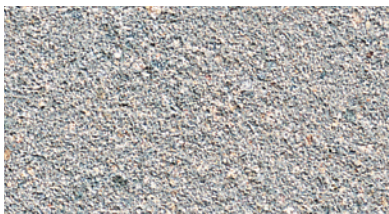

Charcoal

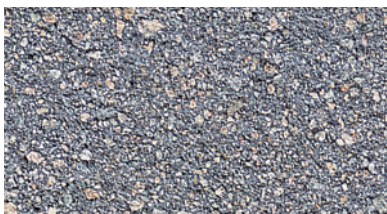

Buff

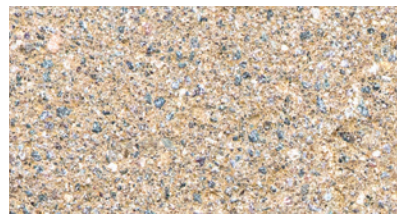

Golden



Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

v1.1