



Arboricultural Impact Assessment

in Relation to Proposed Construction
of Detached Residential Property at



**The Hawthorns, Rimington Lane,
Rimington, Lancashire,
BB7 4DP**

Prepared by:

Bowland 
Tree Consultancy Ltd

September 2023

**ARBORICULTURAL IMPACT ASSESSMENT
THE HAWTHORNS, RIMINGTON LANE, RIMINGTON**

CONTENTS

1. TREE SURVEY SCHEDULE & BS5837: 2012 TABLE 1
2. TEMPORARY PROTECTIVE FENCING SPECIFICATION
3. MANUFACTURER'S BROCHURE FOR 3-D CELLULAR CONFINEMENT SYSTEM
4. TREE CONSTRAINTS PLAN
5. TREE IMPACT PLAN



Unit Two
11 Cannon Street
Preston
Lancashire
PR1 3NR

T: 01772 437150

E: info@bowlandtreeconsultancy.co.uk

Ground Floor
14 Castlegate
Penrith
Cumbria
CA11 7HZ

T: 01768 744450

**ARBORICULTURAL IMPACT ASSESSMENT
THE HAWTHORNS, RIMINGTON LANE, RIMINGTON**

Project Details

Project No.: BTC2820

Site: The Hawthorns, Rimington Lane, Rimington, BB7 4DP

Client: David Holmes Construction

Council: Ribble Valley Borough Council

Survey Date: 1 September 2023

Surveyed by: [REDACTED] MSc BSc(Hons) HND MArborA CEnv MICFor

Prepared by: [REDACTED] MSc BSc(Hons) HND MArborA CEnv MICFor

Checked by: [REDACTED] BSc(Hons) FdSc MArborA MICFor

Date of Issue: 7 September 2023

Version No: 1

| | | | | | | | |
|--|---|--|--|--|--|--|--|
| TREE SURVEY SCHEDULE FOR ARBORICULTURAL IMPACT ASSESSMENT | | | | | | | |
| Site: | The Hawthorns, Rimington Lane, Rimington, Lancashire, BB7 4DP | | | | | | |
| Client: | David Holmes Construction | | | | | | |

| | |
|-----------------------|--------------------------------------|
| Surveyor: | ██████████ Chartered Arboriculturist |
| Survey Date: | 1 September 2023 |
| Job Reference: | BTC2820 |

| No. | Species | Height | Stem Diam. | Branch Spread | Branch & Canopy Clearances | Life Stage | PC | General Observations and Comments | Management Recommendations | ERC | Cat. Grade | RPA (m ²) | RPA Radius (m) |
|-----|---|--------|------------|----------------------------|----------------------------|------------|----|--|--|-----|------------|-----------------------|----------------|
| T1 | Silver Birch | 15.5 | 640 | N 5 E 6 S 5 W 5.5 | 2-S 4 | M | G | Minor stem lean east. | <ul style="list-style-type: none"> Retain tree in context of proposed development. Ensure protection of tree's Root Protection Area (RPA) (see Tree Impact Plan (TIP)) throughout development through establishment of a Construction Exclusion Zone (CEZ) in accordance with appended specification. Construct proposed driveway that encroaches within RPA to be constructed using a 3d Cellular Confinement System in accordance with section 7.4 of BS5837:2012 (see appended Manufacturer's Brochure). | 20+ | B1/2 | 185 | 7.68 |
| H1 | Privet | ≈ 1 | N/A | ≤ 0.5 wide | N/A | SM | G | Short length of managed hedge internal to site. | <ul style="list-style-type: none"> Remove hedge in order to construct development as proposed. Compensate for removal through new hedge planting along road frontage as indicated (see TIP). | 40+ | C1 | N/A | ≈ 1 |
| H2 | Common Beech, Common Hawthorn, Elder, Cherry, Laurel, Dogwood | ≈ 2 | N/A | ≤ 2 wide | N/A | SM | G | <ul style="list-style-type: none"> Length of previously managed hedge along western and southern boundary. Mainly Beech, but species composition becomes more mixed along southern boundary. Several small to moderate sized spaces along southern section. | Retain hedge in context of proposed development. | 40+ | C1 | N/A | ≈ 1.5 |
| H3 | Common Beech | ≤ 7 | ≤ 150 | ≤ 2 wide | N/A | SM | G | <ul style="list-style-type: none"> Short length of previously managed hedge internal to site. Overgrown to north. | Translocate hedge to elsewhere on site, in context of proposed development. | 40+ | C1 | N/A | ≈ 1.8 |
| H4 | Common Hawthorn, Hazel, Elder, etc. | ≤ 2.5 | N/A | ≤ 0.5 wide | N/A | Y-EM | G | <ul style="list-style-type: none"> Length of previously managed hedge along road frontage. Young to western end, but becoming more mature and established further east. | <ul style="list-style-type: none"> Remove approximately 15m of hedge in order to form proposed new access. Retain remaining section to north-east in context of proposed development. Compensate for removal through new hedge planting along road frontage as indicated (see TIP). | 40+ | C1 | N/A | ≈ 1 |

Headings and Abbreviations:

No. Allocated sequential reference number - Tree ('T'), Group ('G'), Woodland ('W') or Hedge ('H') reference number - refer to plan and to numbered tags where applicable

Species: Common name

Height: In metres, to half nearest metre - where possible approximately 80% are measured using an electronic clinometer and the remainder estimated against the measured trees. In the case of Groups and Woodlands the measurement listed is that of the highest tree

Stem Diam.: Stem diameter in millimetres, to nearest 10mm - measured and calculated as per Annex C of BS5837:2012. MS = multi-stemmed, TS = twin-stemmed

Branch Spread: Crown radius measured (or estimated where considered appropriate) from the four cardinal points (north, east, south and west) to give an accurate visual representation of the crown

Branch & Canopy Clearances: Existing height above ground level, in metres, of first significant branch and direction of growth (e.g. 2.5-N) and of canopy at lowest point - to inform on crown to height ratio, potential for shading, etc.

Life Stage: Estimated age class - Y = young, SM = semi-mature, EM = early-mature, M = mature, PM = post-mature

PC: Physiological Condition - a measure of the tree(s)' overall vitality, i.e. D = Dead, MD = Moribund, P = Poor, M = Moderate, G = Good

General Observations and Comments: Comments relating to the tree(s)' overall condition and any other pertinent factors including structural defects, current and potential direct structural damage, physiological decline, poor form, etc.

Management Recommendations: Either Preliminary or In Consideration of the Proposal - In the case of Arboricultural Constraints Surveys the recommended management works only take existing site and tree circumstances and conditions into account and not proposed developments. Arboricultural Impact Assessment and Method Statement related Surveys take the proposed development into consideration with recommendations made accordingly. More than one option may be given if considered appropriate

ERC: Estimated Remaining Contribution - in years as per BS5837:2012 (i.e. <10, 10+, 20+, 40+)

Cat. Grade: Category Grading - tree retention value listed as U, A, B or C - in accordance with BS5837:2012 Table 1

RPA m²: Root Protection Area in m² - calculated area around the tree that must be appropriately protected throughout the development process in order avoid root damage

RPA Radius (m): Root Protection Area Radius - in metres measured from the centre of the stem to the line of tree protection

(Estimated Dimensions): Where trees are located off-site, or are inaccessible for any other reason, and accurate measurements or other information cannot be taken then the information provided is estimated and is duly suffixed with a "#" symbol

DISCLAIMER

Survey Limitations: Unless otherwise stated all trees are surveyed from ground level using non-invasive techniques. The disclosure of hidden crown and stem defects, in particular where they may be above a reachable height or where trees are ivy clad or in areas of ground vegetation, cannot therefore be expected. All obvious defects, however, are reported. Detailed tree safety appraisals are only carried out under specific written instructions. Comments upon evident tree safety relate to the condition of said tree at the time of the survey only.

Unless otherwise stated all trees should be re-inspected annually in order to appraise their on-going mechanical integrity and physiological condition. It should, however, be recognised that tree condition is subject to change, for example due to the effects of disease, decay, high winds, development works, etc. Changes in land use or site conditions (e.g. development that increases access frequency) and the occurrence of severe weather incidents are also significant considerations with regards tree structural integrity and trees should therefore be re-assessed in the context of such changes and/or incidents and inspected at intervals relative to identified and varying site conditions and associated risks.

Where trees are located wholly or partially on neighbouring private third-party land then said land is not accessed and our inspection is therefore restricted to what can reasonably be seen from within the site. Stem diameters of trees located on such land are estimated. Any subsequent comments and judgments made in respect of such trees are based on these restrictions and are our preliminary opinion only. Recommendations for works to neighbouring third-party trees are only made where a potentially unacceptable risk to persons and/or property has been identified during our survey. Where significant structural defects of third-party trees are identified and associated management works are considered essential to negate any risk of harm and/or damage then we will first attempt to inform the site occupier of the issues and, if not possible, then inform the relevant Council. Where a more detailed assessment is considered necessary then appropriate recommendations are set out in the Tree Survey Schedule.

Where tree stem locations are not included on the plan(s) provided then they are plotted at the time of the survey using, where appropriate and/or practicable, a combination of measurement triangulation and GPS co-ordination. Where this is not possible then locations are estimated. Restrictions in these respects are detailed in the report.

The tree survey and any report information provided is intended as a guide to identify key tree related constraints to site development only. As such, the potential influence of trees upon existing or proposed buildings or other structures resulting from the effects of their roots abstracting water from shrinkable load-bearing soils is not considered herein. The tree survey information in its current form should not therefore be considered sufficient to determine appropriate foundation depths for new buildings. Accordingly, an updated survey, with reference to the current NHBC Standards Chapter 4.2 - Building Near Trees, must therefore be prepared for the specific purpose of informing suitable foundation depths subsequent to planning approval being granted. The advice of a structural engineer must also be sought with regard to appropriate foundation depths for new buildings.

Copyright & Non-Disclosure Notice: The content and layout of this report are subject to copyright owned by Bowland Tree Consultancy Ltd, save to the extent that copyright has been legally assigned to us by another party or is used by Bowland Tree Consultancy Ltd under license. The report remains the property of Bowland Tree Consultancy Ltd until such time as payment in full for the services conducted as per the contract of Bowland Tree Consultancy Ltd's appointment has been compensated. The report may not be copied or used without our prior written agreement for any purpose other than those indicated. Unauthorised reproduction or usage of the report by any person is prohibited.

Third Parties: Any disclosure of this document to a third party is subject to this disclaimer. The report was prepared by Bowland Tree Consultancy Ltd at the instruction of and for use by our client, as named. This report does not in any way constitute advice to any third party who is able to access it by any means. Bowland Tree Consultancy Ltd excludes to the fullest extent lawfully permitted all liability whatsoever for any loss or damage arising from reliance on the contents of this report.

Statutory Tree Protection: It is the client's responsibility to check for the presence of any statutory tree protection measures, such as the site's location within a Conservation Area and/or the presence of any Tree Preservation Orders, directly with the applicable Council's planning department prior to scheduling or carrying out any tree works. In turn, it is also the client's responsibility to check for the need for a felling licence with the Forestry Commission prior to scheduling or carrying out any tree works. Bowland Tree Consultancy Ltd cannot be held responsible for any decisions made by the client to prune or remove trees where any such statutory protection exists.

Liability: This report was prepared for the sole use of 'The Client' and, where applicable, the client's 'Agent', in accordance with the agreement under which the services were instructed. No warranty, express or implied, is made as to the advice in this report or any other service provided by Bowland Tree Consultancy Ltd. This report may not be relied upon by any other party except the client or any third party for whom the report is intended without the prior written permission of Bowland Tree Consultancy Ltd. The content of this report is, at least in part, based upon information provided by secondary data sources and on the assumption that all relevant information has been provided by those parties from whom it has been requested. Information obtained from any third party has not been independently verified by Bowland Tree Consultancy Ltd, unless otherwise stated in the report.

Validity: The findings and recommendations contained within this report are, providing its recommendations are observed and the site conditions are retained as per the date(s) of the survey, valid for a period of twelve months from the last survey date. This period of validity may be reduced should there be any changes in factors affecting both the surrounding environment and/or built structures in relative proximity to the trees. The condition of trees should be re-appraised directly, through a site survey, following major weather events such as storms, changes undertaken to the site's conditions, inclusive of demolition and/or ground works, or the removal of existing site vegetation, including trees.

BS5837:2012 Table 1 – Cascade Chart for Tree Quality Assessment


| Category and definition | Criteria (including subcategories where appropriate) | | | Identification on plan | | | |
|---|---|--|--|------------------------|---|--------------------------------------|--|
| Trees unsuitable for retention (see Note) | | | | | | | |
| <p>Category U</p> <p>Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years</p> | <ul style="list-style-type: none"> ▪ Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning) ▪ Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline ▪ Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality <p><i>Note: Category U trees can have existing or potential conservation value which it might be desirable to preserve; see BS5837:2012 paragraph 4.5.7.</i></p> | | | Red | | | |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%; text-align: center;">1. Mainly arboricultural qualities</td> <td style="width: 33%; text-align: center;">2. Mainly landscape qualities</td> <td style="width: 33%; text-align: center;">3. Mainly cultural values, including conservation</td> </tr> </table> | | | | | 1. Mainly arboricultural qualities | 2. Mainly landscape qualities | 3. Mainly cultural values, including conservation |
| 1. Mainly arboricultural qualities | 2. Mainly landscape qualities | 3. Mainly cultural values, including conservation | | | | | |
| Trees to be considered for retention | | | | | | | |
| <p>Category A</p> <p>Trees of high quality with an estimated remaining life expectancy of at least 40 years</p> | <p>Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant and/or principal trees within an avenue)</p> | <p>Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features</p> | <p>Trees, groups or woodlands of significant conservation, historical, commemorative or other value (e.g. veteran trees or wood-pasture)</p> | Green | | | |
| <p>Category B</p> <p>Those of moderate quality and value: those in such a condition as to make a significant contribution. A minimum of 20 years is suggested.</p> | <p>Trees that might be included in the high category, but are downgraded because of impaired condition. Examples include the presence of remediable defects including unsympathetic past management and minor storm damage</p> | <p>Trees present in numbers, usually as groups or woodlands, so they form distinct landscape features which attract a higher collective rating than they might as individuals. But which are not, individually, essential components of formal or semi-formal arboricultural features. For example, trees of moderate quality within an avenue that includes better, A category specimens. Or trees which are internal to the site, therefore individually having little visual impact on the wider locality</p> | <p>Trees with clearly identifiable conservation or other cultural benefits</p> | Blue | | | |
| <p>Category C</p> <p>Those trees of low quality and value: currently in adequate condition to remain until new planting could be established - a minimum of 10 years is suggested - or young trees with a stem diameter below 150 mm</p> | <p>Trees not qualifying in higher categories</p> | <p>Trees present in groups or woodlands, but without this conferring on them significantly greater landscape value, and/or trees offering low or only temporary screening benefit</p> | <p>Trees with very limited conservation or other cultural benefits</p> | Grey | | | |
| | <p>Note – Whilst C category trees will usually not be retained where they would impose a significant constraint on development, young trees with a stem diameter of less than 150mm should be considered for relocation</p> | | | | | | |

- TEMPORARY PROTECTIVE FENCING & GROUND PROTECTION SPECIFICATION -

Construction Exclusion Zones (CEZs), shall be enclosed by **Temporary Protective Fencing** and/or, where necessary, **Temporary Ground Protection Measures**. The fencing/ground protection Type(s), locations, and extents shall be agreed, in writing, with the Local Planning Authority (LPA). In turn, the **Temporary Protective Fencing** and/or **Temporary Ground Protection Measures** shall:

1. be constructed as in accordance with the Type 1, Type 2 or Type 3 'Temporary Protective Fencing Construction' sections and, where applicable the 'Temporary Ground Protection Measures' section, as detailed herein and agreed, in advance with the LPA;
2. be retained in place throughout the development process until completion of the project, and only removed following receipt of written permission from the LPA;
3. be sited in the area(s) defined by the Root Protection Areas on the associated Tree Impact Plan, or as the CEZs on the Tree Protection Plan;
4. be erected prior to any construction, demolition or excavation works and remain in place for the duration of the project;
5. preclude any delivery of site accommodation and/or materials and/or plant machinery;
6. preclude all construction related activity, with the sole exception of specified arboricultural works and any other works to be carried out under supervision that have been agreed by all parties;
7. preclude the storage of all development related materials and substances including fuels, oils, additives, cement and/or any other deleterious substance; and
8. be affixed with a 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1, below), at every 10.0 metre length of protective fencing.
9. **Important:** Any incursion into CEZs must be by prior arrangement, following consultation with the LPA.


Figure 1: CEZ Warning Sign

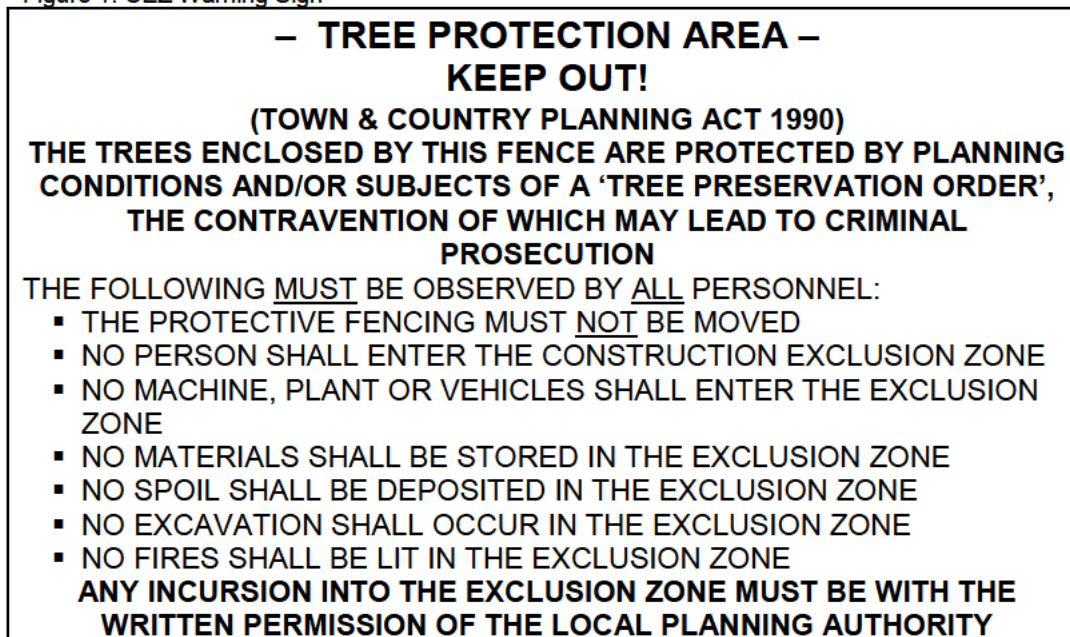

Type 1 (i.e. 'Default') Temporary Protective Fencing Construction (see Figure 2, below)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall butt together and be securely fixed to a scaffold framework, as per points 3 to 5 of Figure 2, overleaf.
3. The scaffold framework shall comprise of upright poles of at least 3.0 metres in length driven no less than 0.6 metres into the ground at maximum 3.0 metre centres with horizontal and diagonal poles fixed to the uprights, as per points 4 to 5.
4. The two horizontal rail poles shall be attached to the uprights at heights of 0.6 and 1.8 metres with 3 no. clamps to each joint.
5. The diagonal scaffold pole struts be clamped to the top rail of the scaffold framework at a 45° angle and extend back into the CEZ and clamped to a 0.7 metre length of scaffold tube that shall be driven no less than 0.5m into the ground.
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 2: BS5837:2012 Default specification for protective barrier

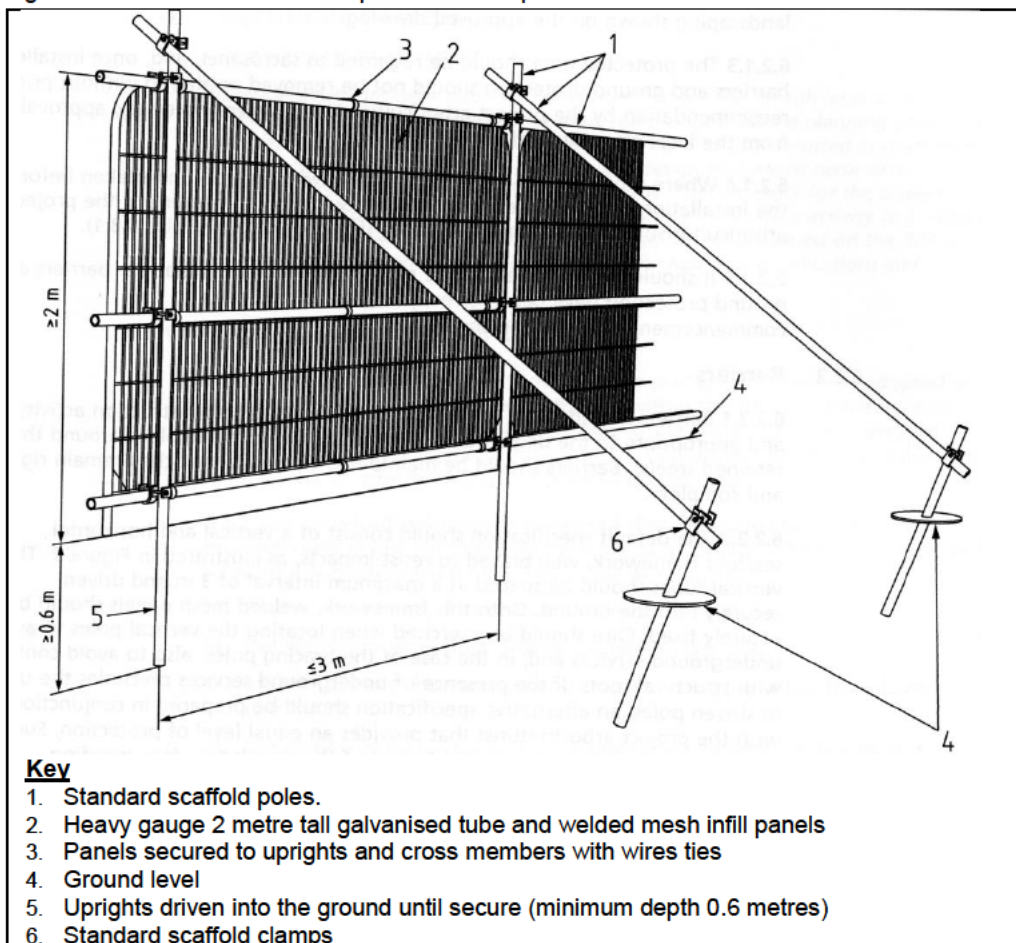

Type 2 Temporary Protective Fencing Construction (see Figure 3(a), below)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall stand on rubber or concrete feet.
3. The panels shall butt together, and be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence.
4. The distance between the fence couplers shall be at least 1.0 metre, and shall be uniform throughout the fence.
5. The panels shall be supported on the inner side by stabiliser struts, which shall be clamped to the scaffold framework at a 45° angle and extend back into the CEZ and shall be attached to a base plate, which shall be secured to the ground with pins (Figure 3a).
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 3(a): Type 2 Fencing (BS5837:2012 above-ground strut stabilising system with ground pins)

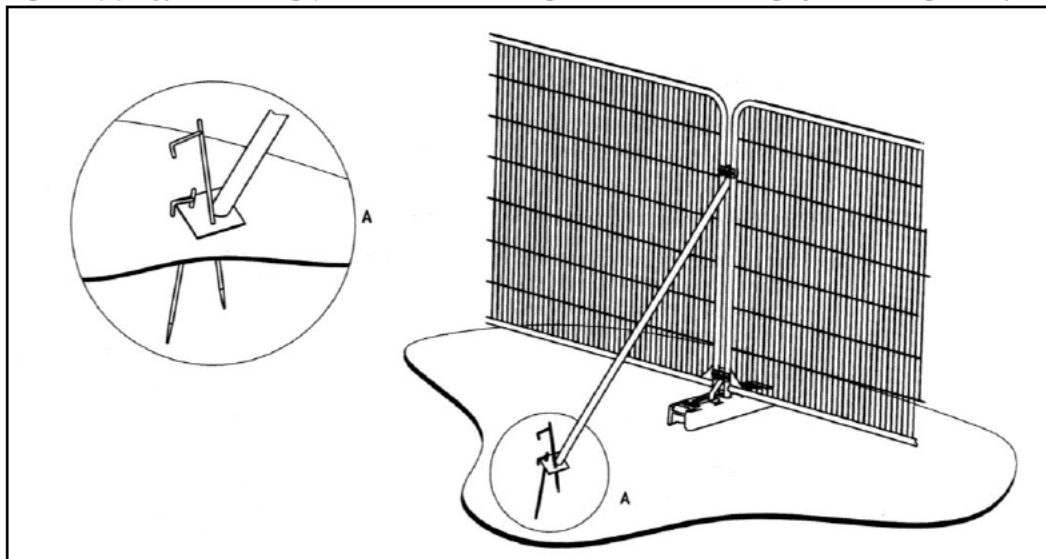

Type 3 Temporary Protective Fencing Construction (see Figure 3(b), overleaf)

1. Temporary protective fencing panels shall be weldmesh "Heras" panels of at least 2.0 metres in height.
2. The panels shall stand on rubber or concrete feet.
3. The panels shall butt together, and be joined together using a minimum of two anti-tamper couplers, installed so that they can only be removed from inside the fence.
4. The distance between the fence couplers shall be at least 1.0 metre, and shall be uniform throughout the fence.
5. The panels shall be supported on the inner side by stabiliser struts, which shall be clamped to the scaffold framework at a 45° angle and extend back into the CEZ and shall be attached to a block tray base (Figure 3b).
6. No fixing shall be made to any tree and all possible precautions shall be taken to prevent damage to tree roots when locating posts.
7. A 600mm x 300mm warning sign reading "TREE PROTECTION AREA KEEP OUT" (see Figure 1) shall be fixed to every 10.0 metre length of protective fencing.
8. On completion of erection, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Protective Fencing.


Figure 3(b): Type 3 Fencing (BS5837:2012 above-ground stabilising system with strut on block tray)

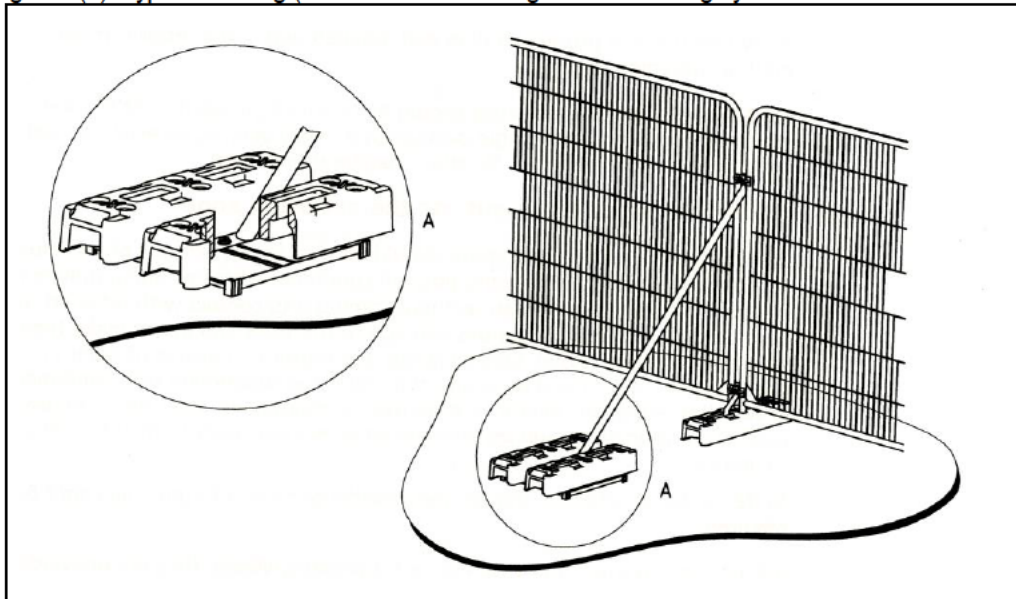

Temporary Ground Protection

1. Any necessary Temporary Ground Protection areas shall conform to Figure 4, below, unless otherwise agreed with the LPA.
2. The Ground Protection Area shall be left undisturbed and covered by a semi-permeable geotextile membrane which shall, in turn, be covered by a compressible layer consisting of a material such as woodchip.
3. Side-butting scaffold boards shall then be fitted to cover the Ground Protection Area.
4. On completion of installation, and prior to any demolition or construction works, site preparation, excavation or delivery of plant and materials, the Consulting Arboriculturist or the LPA Tree Officer, as agreed, shall inspect the Temporary Ground Protection.
5. The Temporary Ground Protection shall remain in place until completion of the project and only removed following receipt of written permission from the LPA.

Figure 4: Temporary Ground Protection – Recommended Construction

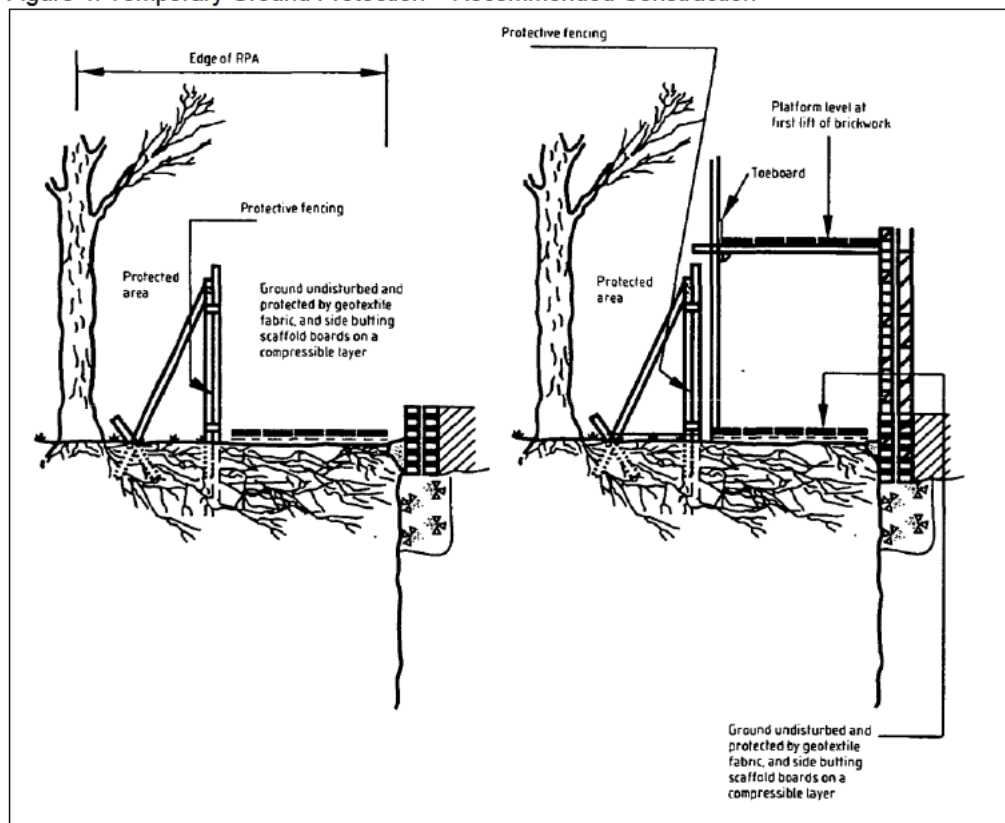

PRESTO



INSTALLATION GUIDE

■ **simplified**



GEOWEB® Tree Root Protection






GEOWEB® Tree Root Protection

- 1 Prepare subgrade. Remove debris, rocks.




- 2 Install TRP4000 geotextile.
Overlaps by minimum 300 mm.

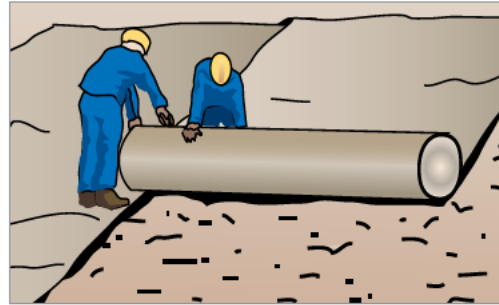



- 3 Partially expand GEOWEB® sections.




- 4 Connect GEOWEB® sections with ATRA® keys.

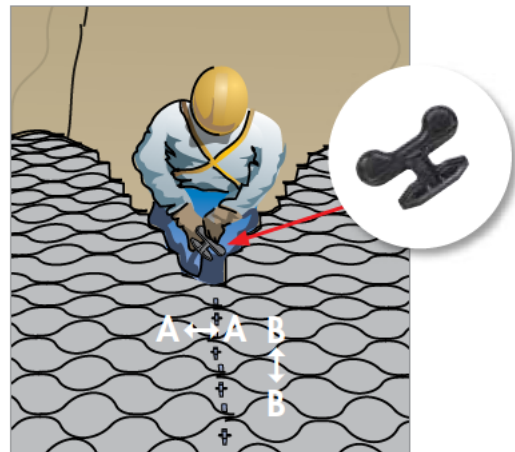

- 5 Connect side to side (A) and end to end (B).

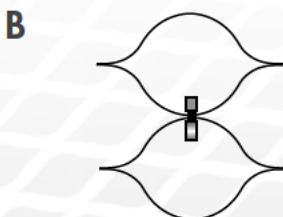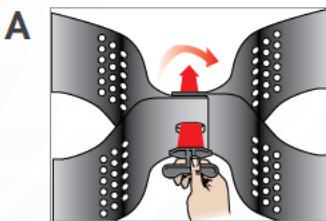

- 6 Fully expand GEOWEB® sections.

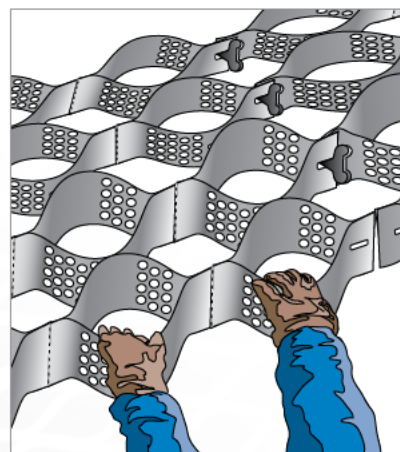

IMPORTANT NOTE:


The simplified installation guide provided by Presto GEOSYSTEMS® is intended as a general guideline only. The contractor should follow contract plans and specifications and refer to detailed installation guidelines for more information.

Hold sections open. Use Options A, B, C or D.

A T-Bars



B ATRA® anchors

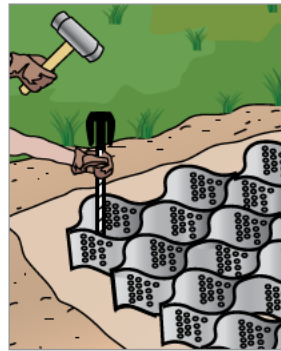

C Wood Stakes



D Infill Select Cells




8 Infill GEOWEB® cells.




9 Spread Infill ensuring a 25 mm overfill at all times.



10 If required, use a 4t smooth, non-vibrating roller on overfilled GEOWEB® system. Refill as needed to ensure a 25 mm overfill.

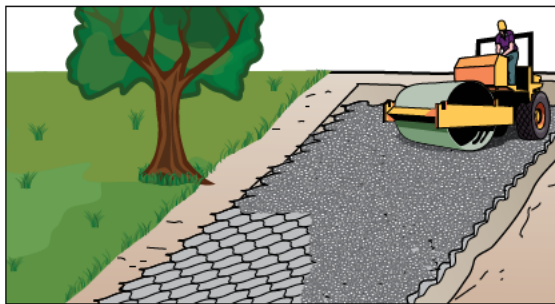

11 Surface option ready to install according to specification.

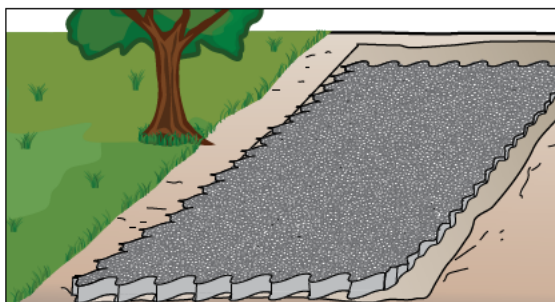

info@greenfix.co.uk
 tel: 01608 666027
www.greenfix.co.uk

Greenfix
Soil Stabilisation and Erosion Control Specialists

Geoweb infill material for Tree Root Protection
Clean Angular Stone 4-20mm

Specification for open graded infill material for Geoweb cellular confinement within tree root protection applications. The no fines material is to ensure high ratio void space which corresponds with ideal soil void ratios for tree root health.

Material to BSEN1342 or BSEN12620. Crushed gravel is not permitted.

| Properties of material | Test | Value |
|---|------------|--------------------|
| Grading of particle size | BSEN 13242 | Grading 4-20mm |
| Fines Content | BSEN 13242 | 1% |
| Shape / flatness index | BSEN 13242 | F ₁₀₀ |
| Resistance to fragmentation | BSEN 13242 | LA ₁₀ |
| Resistance to wear | BSNE 13242 | M ₁₀ 20 |
| Water absorption rate BSNE 1097-6:2000 clause 7 | BSNE 13242 | WA ₂₄ 2 |
| For typical WA>2% magnesium sulphate soundness | BSNE 13242 | MS ₁₈ |
| Acid soluble sulphate content air-cooled blast furnace slag | BSNE 13242 | AS ₀₁ |
| Acid soluble sulphate content non air cooled blast furnace slag | BSNE 13242 | AS ₀₂ |
| Total sulphur aggregates other than air cooled blast furnace slag | BSNE 13242 | <1% by mass |
| Total sulphur air cooled blast furnace slag | BSNE 13242 | <2% by mass |

| Sieve Size mm | Percentage of 4-20mm passing |
|---------------|------------------------------|
| 40 | 100 |
| 31.5 | 98 - 100 |
| 20 | 90 - 99 |
| 10 | 25 - 70 |
| 4 | 0 - 15 |
| 2 | 0 - 5 |
| 1 | - |

Air cooled blast furnace and steel slag should be free from Dicalcium silicate and iron disintegration in accordance with BSEN 13242:2002, 6.4.2.2 VS
 Leaching of materials for blast furnace slag and other recycled materials should meet requirements of the Environmental waste acceptance criteria for inert waste when tested in accordance with BSEN 12457-3
 On poor site conditions which require compaction, this should be minimum 4 passes of a smooth wheeled roller at max weight 1000kg/m width without vibration.

For assistance on correct 4–20mm clean angular stone infill specification, please contact Greenfix technical team.



GEOSYSTEMS®

MATERIALS SUPPLIED BY **Greenfix**

GEOWEB®



TRP4000
Non-woven Geotextile



ANCHORS ATRA® KEY



**ADDITIONAL
MATERIALS REQUIRED**

4–20mm clean, angular stone



LIMITED WARRANTY

Presto GEOSYSTEMS® warrants each GEOWEB® section which it ships to be free from defects in materials and workmanship at the time of manufacture. Presto's exclusive liability under this warranty or otherwise will be to furnish without charge to Presto's customer at the original f.o.b. point a replacement for any section which proves to be defective under normal use and service during the 10-year period which begins on the date of shipment by Presto. Presto reserves the right to inspect any allegedly defective section in order to verify the defect and ascertain its cause.

This warranty does not cover defects attributable to causes or occurrences beyond Presto's control and unrelated to the manufacturing process, including, but not limited to, abuse, misuse, mishandling, neglect, improper storage, improper installation, improper alteration or improper application.

PRESTO MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, WRITTEN OR ORAL, INCLUDING, BUT NOT LIMITED TO, ANY WARRANTIES OR MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE, IN CONNECTION WITH THE GEOWEB® SYSTEM. IN NO EVENT SHALL PRESTO BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR THE BREACH OF ANY EXPRESS OR IMPLIED WARRANTY OR FOR ANY OTHER REASON, INCLUDING NEGLIGENCE, IN CONNECTION WITH THE GEOWEB® SYSTEM.

GEOSYSTEMS®, GEOWEB®, and ATRA® are registered trademarks of Reynolds Presto Products Inc.

GEOWEB® MANUFACTURER:



PRESTO GEOSYSTEMS®
Appleton, Wisconsin, USA

EU HEAD OFFICE/ENGINEERING SUPPORT:




SOILTEC GmbH: Germany
www.soiltec-geosystems.de

DISTRIBUTED BY:

Greenfix
Soil Stabilisation and
Erosion Control Specialists

Greenfix Soil Stabilisation & Erosion Control Limited
Old Manor Farm Yard
Beckford Road
Ashton under Hill
Evesham
Worcestershire
WR11 7SU
info@greenfix.co.uk
www.greenfix.co.uk
01608666027

JUN 2016
AP-8085

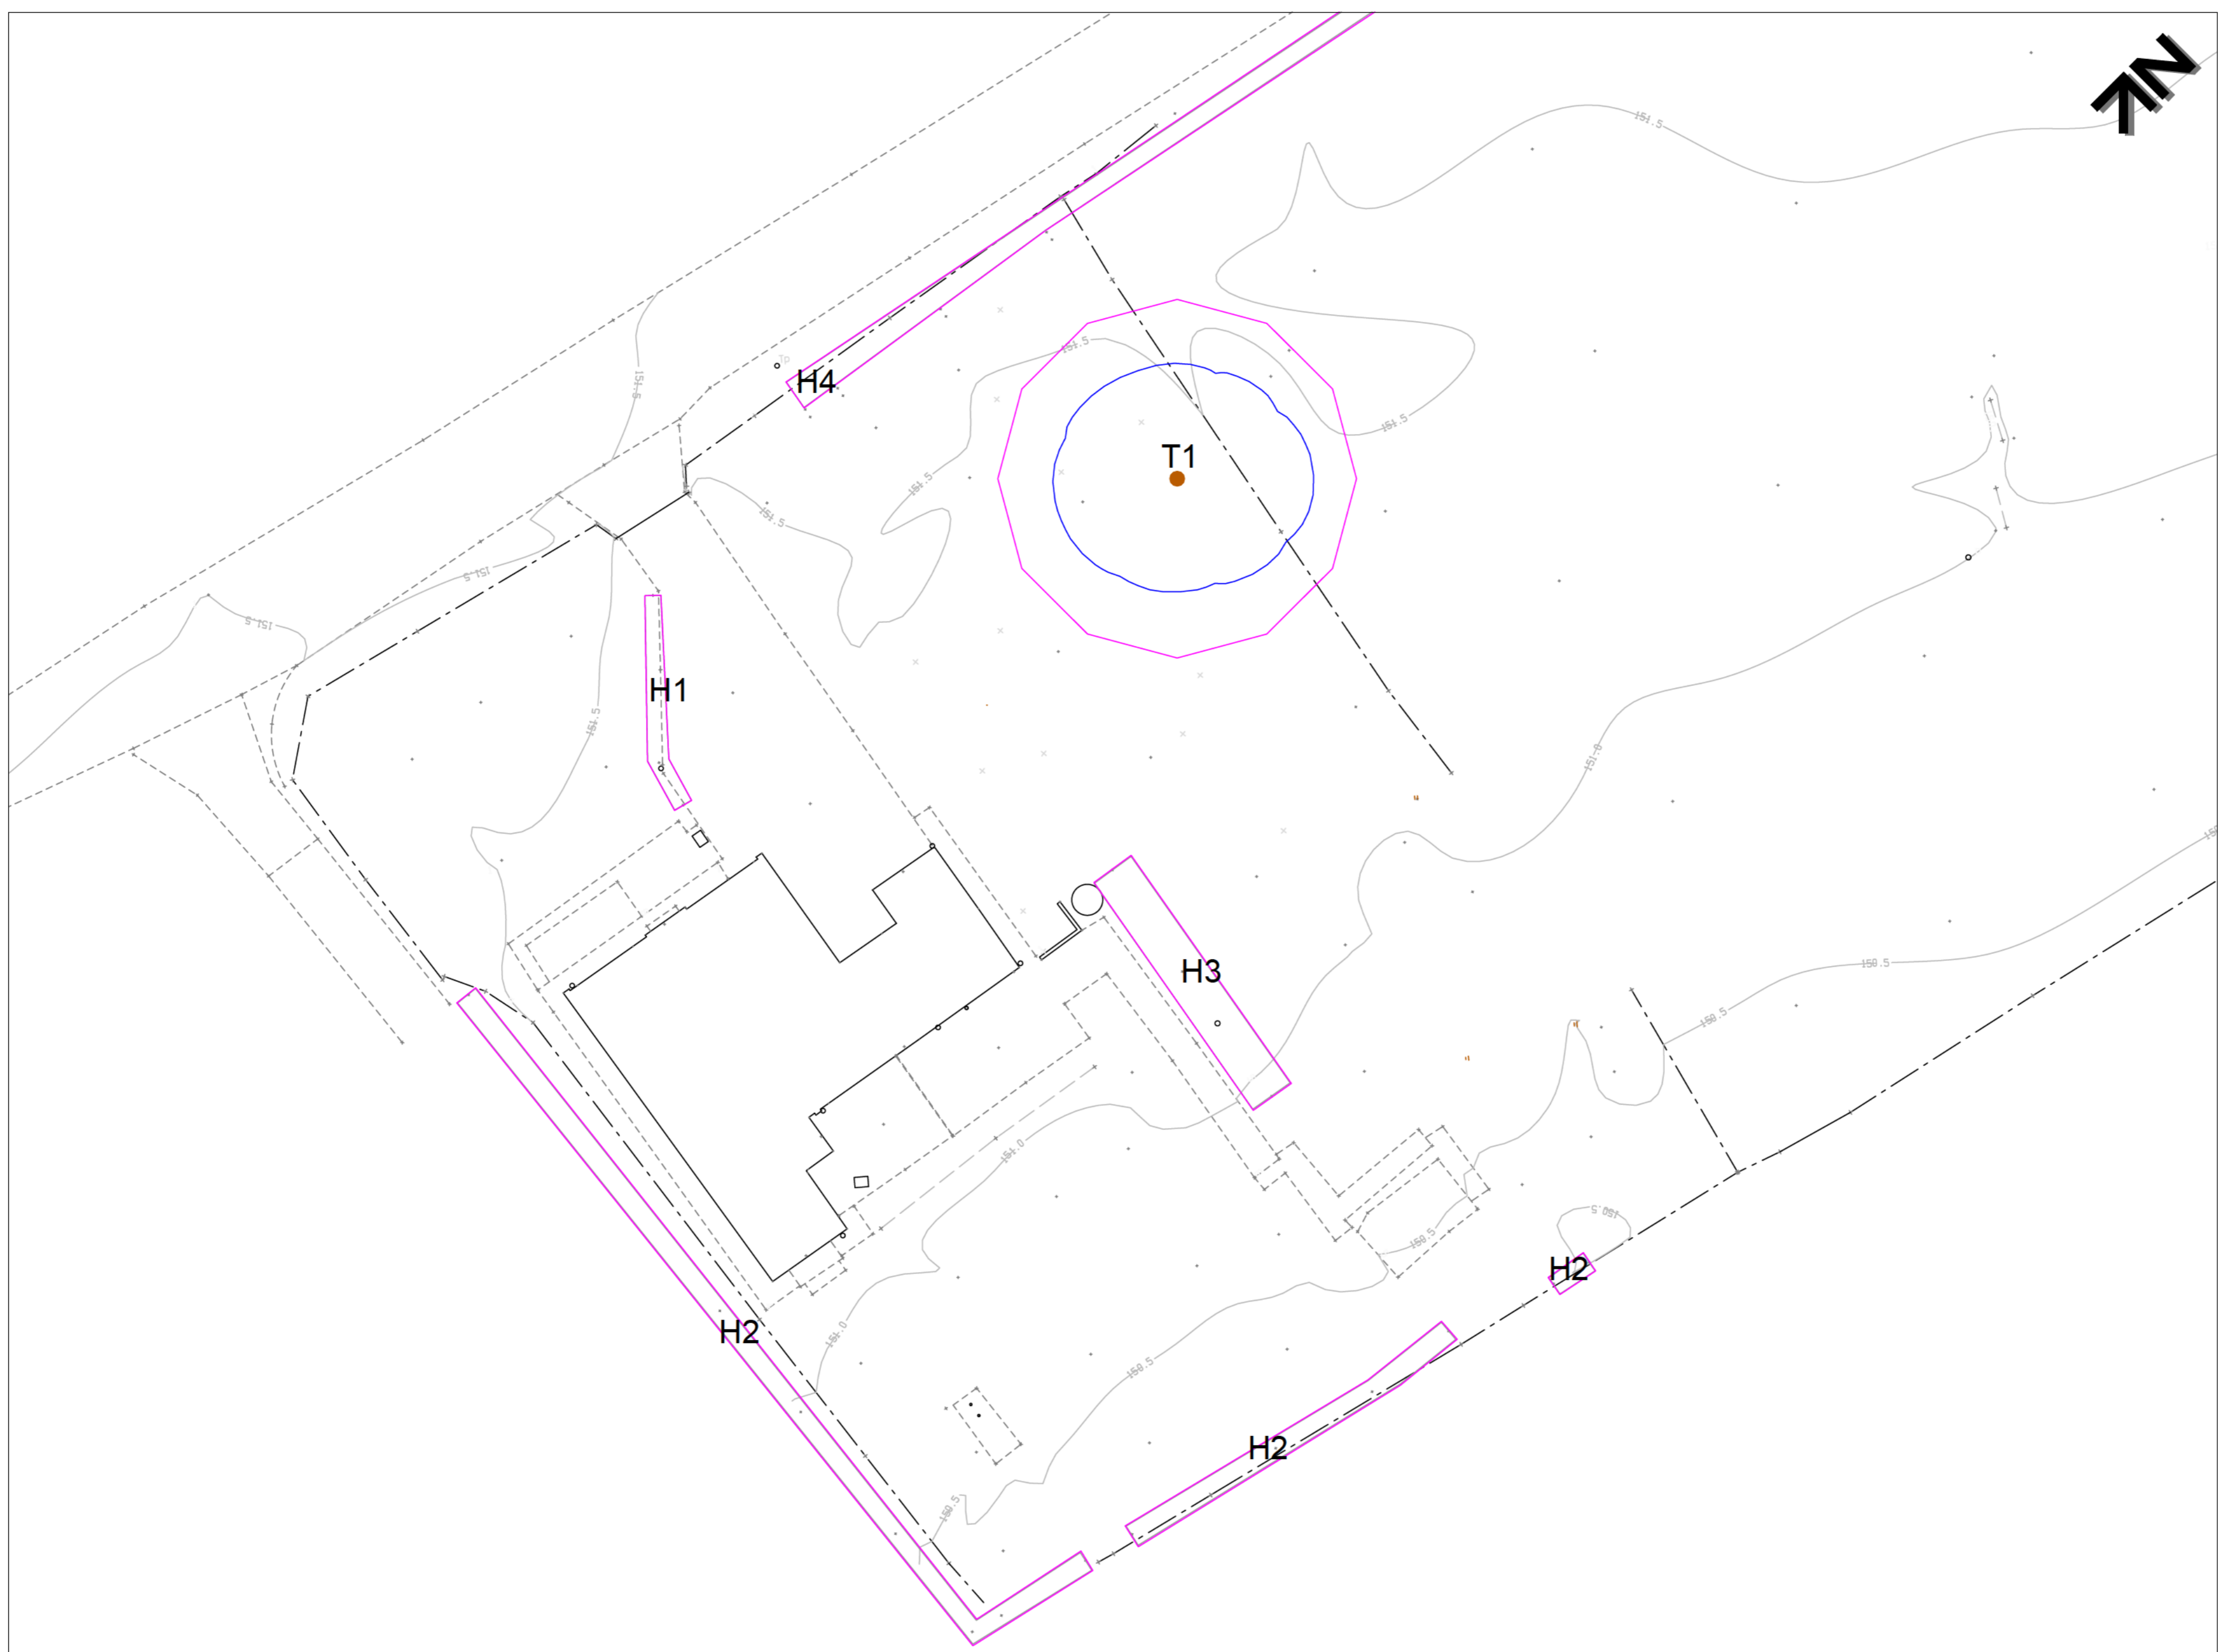


KEY


T = Individual Tree
H = Hedge


Please refer to associated Tree Survey Schedule and appendices for specific details in respect of items below:

Tree Categorisations:


Those to be Considered for Retention:

 Category 'A' Tree/Hedge
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years


 Category 'B' Tree/Hedge
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 20 Years

 Category 'C' Tree/Hedge
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years, or Young Trees

Those Considered Unsuitable for Retention:

 Category 'U' Tree/Hedge
Those in Such a Condition that they Cannot Realistically be Retained as Living Trees in the Context of the Current Land Use for Longer Than 10 Years

Root Protection Areas (RPAs):

 RPAs
Area(s) of Ground Around Trees that Should be Protected Throughout Development Works with Protective Fencing to form a Construction Exclusion Zone - see Temporary Protective Fencing Specification

Project:
THE HAWTHORNS
RIMINGTON LANE
RIMINGTON
LANCASHIRE
BB7 4DP

Client:
DAVID HOLMES CONSTRUCTION


Title:
TREE CONSTRAINTS PLAN
in Relation to Proposed Construction of Detached Residential Property

Scale: 1:200@A2
Date: September 2023
Drawn by: MM
Checked by: PH



Ref: BTC2820-TCP Rev:

Important: The original version of this plan was produced in colour, which is essential to the plan's interpretation and usability. As such, a monochrome copy should not be relied upon

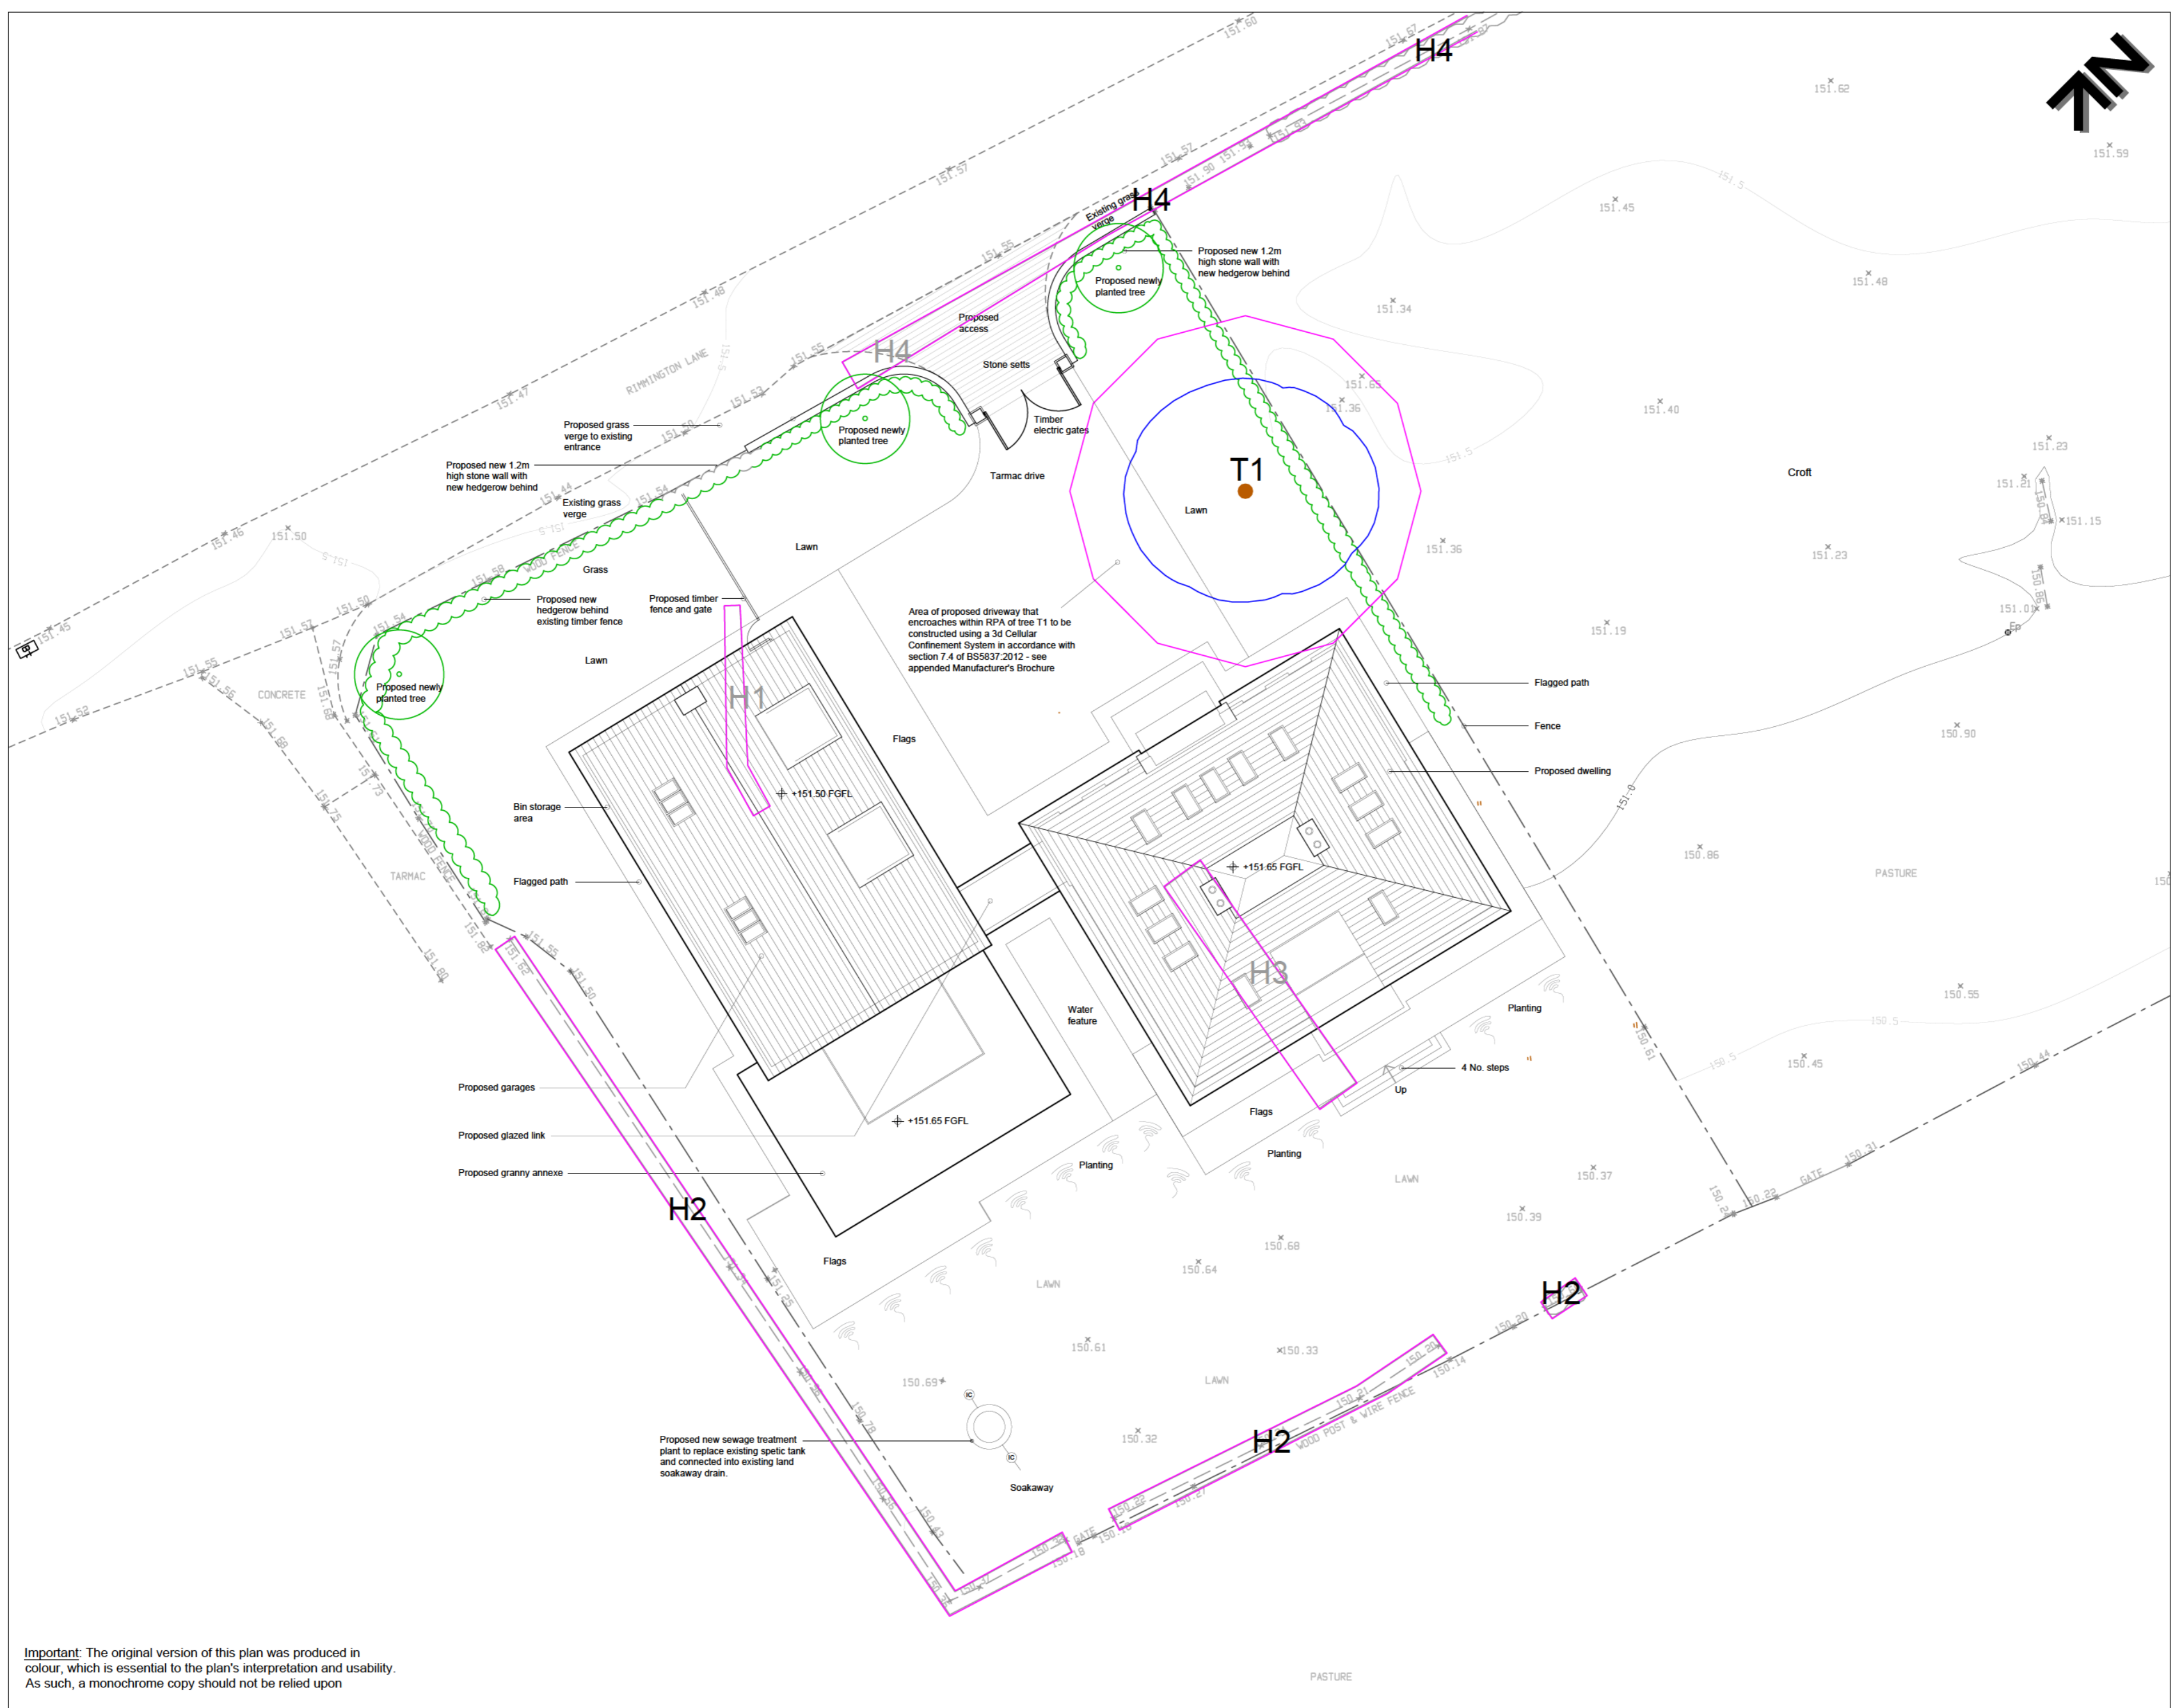

KEY

T = Individual Tree
H = Hedge

Please refer to associated Tree Survey Schedule and appendices for specific details in respect of items below:

Tree Categorisations:

Those to be Considered for Retention:

- Category 'A' Tree/Hedge
Those of a High Quality with an Estimated Remaining Life Expectancy of at Least 40 Years
- Category 'B' Tree/Hedge
Those of a Moderate Quality with an Estimated Remaining Life Expectancy of at Least 20 Years
- Category 'C' Tree/Hedge
Those of Low Quality with an Estimated Remaining Life Expectancy of at Least 10 Years, or Young Trees

Those Considered Unsuitable for Retention:

- Category 'U' Tree/Hedge
Those in Such a Condition that they Cannot Realistically be Retained as Living Trees in the Context of the Current Land Use for Longer Than 10 Years

Note: Trees with their identifying numbers labelled in grey are proposed for removal/relocation in the context of the proposed development

Root Protection Areas (RPAs):

RPAs
Area(s) of Ground Around Trees that Should be Protected Throughout Development
Works with Protective Fencing to form a Construction Exclusion Zone - see Temporary Protective Fencing Specification

Project:
THE HAWTHORNS
RIMINGTON LANE
RIMINGTON
LANCASHIRE
BB7 4DP

Client:
DAVID HOLMES CONSTRUCTION

Title:
TREE IMPACT PLAN
in Relation to Proposed Construction of Detached Residential Property

Scale: 1:200@A2
Date: September 2023
Drawn by: MM
Checked by: PH



Ref: BTC2820-TIP Rev:

Important: The original version of this plan was produced in colour, which is essential to the plan's interpretation and usability. As such, a monochrome copy should not be relied upon