


New Doors.

The following are identified as new doors -
ED01 and ED09
DG01; 02; 03; 06 and 07
DF02 and 14

All new internal doors to follow the proportion and details of the existing doors in the property with raised and fielded panelled, painted solid timber doors. Architraves to match existing with plinth blocks. All as DG01 and DF02 as outlined below.

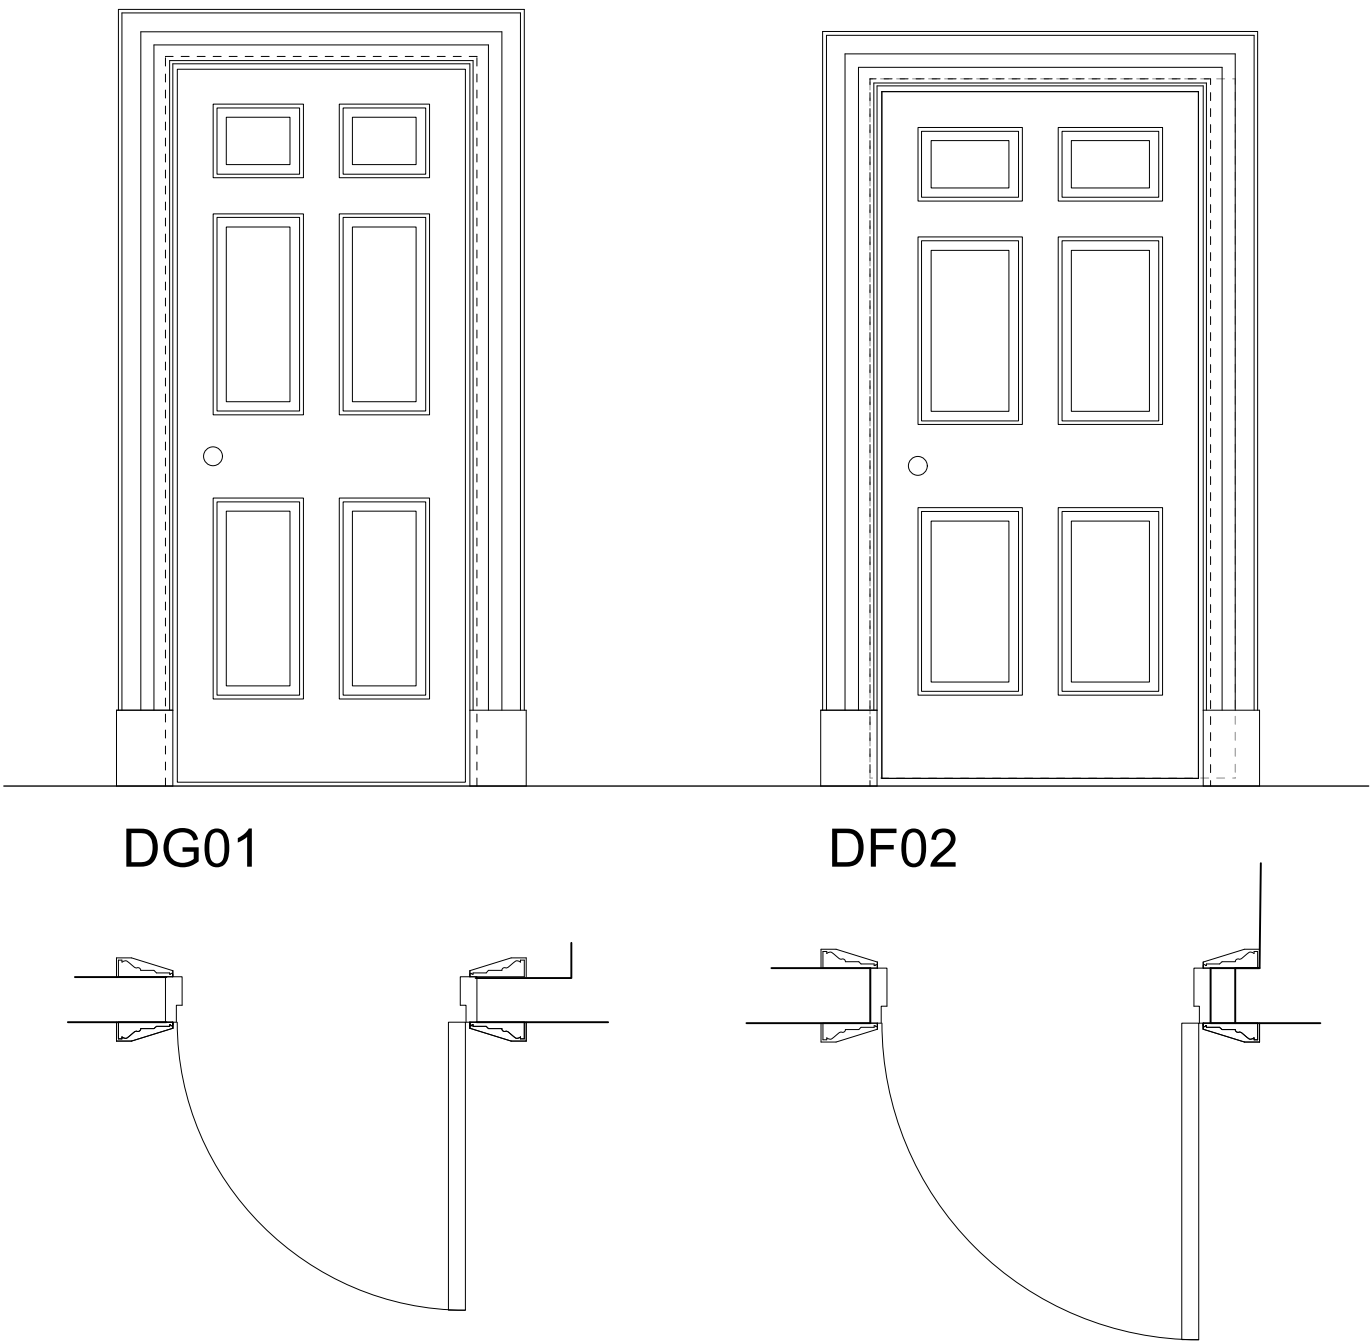

New Windows.

The following are identified as being replaced -
WG01; 02; 03; 10; 11; 12; 13 and 14
Note WG10; 11; 12 and 13 extend into the void over the window to form door openings.
WF01; 02; 03; 07; 08; 09; 10; 11; 12; 14

A new window opening is to be formed, with a new double glazed timber sliding sash window to match existing for WF13

All new windows are to be in timber, assumed accoya, with profiles to match existing thickness. Double glazed units to be 4:8:4 argon filled. To acheive a U-Value of 1.8W/m2K or better. Depth of frames to remain the same to allow for shutters and panelling to be retained.

overtonarchitects

IDC Valley Drive. Ilkley. West Yorkshire. LS29 8AL
Tel: 01943 601785 mail@overtonarchitects.co.uk

The Old Rectory, Bolton by Bolwand

Mr and Mrs Reed

Door and Window Information

SCALE	DATE	DRWG. NO.	REV
1:20	Feb 2026	2594/01/12	