

SLIM MIDRAIL COMING MARCH 2024

The styling details of our sash windows are now more rooted in history than ever before. The new 37mm slim midrail will reaffirm **Legacy's** position as one of the most authentic sash windows on the market ideal for period properties or homes in conservation areas. Available with run-through sash horns and in selected colours only.



NEW



WEATHER BAR

The sash window boasts an optional ovolo shaped weather bar, which is the latest of our heritage design features, developed to create an authentic sash window appearance.

ASTRAGAL BARS

Include a bar layout on your new sash window added character. Astragal bars are fixed onto the surface of the glass and are accompanied by back spacer bars inside the double-glazed unit to create the appearance of separate panes.



Margin



Half Georgian



Georgian



Georgian Variant

Technical Information

Our technical information section covers manufacturing limitations and detailed technical drawings. To most people the technical drawings don't make much sense, so if you have any questions our product experts will be more than happy to explain in more detail.


TECHNICAL SPECIFICATIONS

Front-to-back Dimensions:	128mm
Sill Options:	150mm / 210mm
Glazed Unit:	24mm Double Glazed
U-Value:	1.4W/m²K
Air Tightness:	Class 4
Water Tightness:	Class 6A
Wind Load:	Class A3

MANUFACTURING LIMITATIONS


Minimum Width:	375mm
Minimum Height:	800mm
Maximum Width:	1500mm
Maximum Height:	2400mm

KEY PROFILE SECTIONS

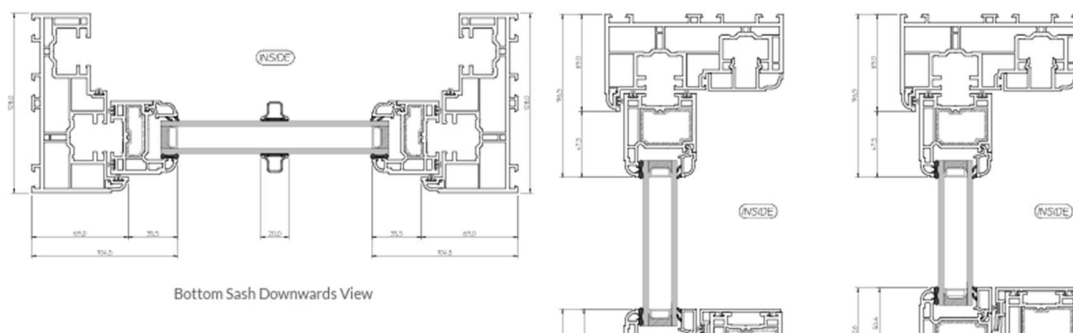


Colour Options


Our sliding sash windows are available in 17 standard woodgrain colourways including 2 dual foil options. By choosing a woodgrain foiled finish you can bring your windows to life with a glossy, realistic timber effect. You also have the option to add a true personalised touch to your new windows by picking a bespoke colour of your choice!




Ext: White Grain
Int: White Grain



Ext: White Grain
Int: Smooth White



Ext: Cream Grain
Int: Cream Grain



Ext: Cream Grain
Int: Smooth White



Ext: Grey Grain
Int: Grey Grain

'A' ENERGY RATED

The frames and sashes are multichambered, using the power of air as an insulator to stop warmth escaping. All our sash windows feature a 24mm insulated double-glazed glass unit with an argon gas insert as standard, which reduces the heat conductance between the panes. This happens because the gas is 6 times denser than air. The warm edge spacer bar incorporated into all units is made

from an extruded PVC material and has been specifically designed to reduce transference of heat between the panes of glass keeping more heat inside the property.

These thermal efficient elements work together to enable our **Legacy** sash windows to achieve an outstanding energy rating of 'A' and u-value of 1.4W/m²K as standard.

COLOUR-MATCHING WOOLPILE

The sash windows feature woolpile strips that provide an excellent seal against weather, air, and debris infiltration. We've paid attention to every detail and as something new we've introduced colour-matching woolpile to ensure that every single window is perfectly finished.

RECYCLABILITY

uPVC can be recycled over and over again, without any deterioration in performance. uPVC is an environmentally friendly choice as most uPVC windows will be recycled.

By choosing our sliding sash windows you can keep your home warm all year round, reduce your heating bills as well as helping the environment.

Thermal Efficiency

With fuel prices constantly on the rise, thermal performance is crucial. The window frames are built to last and resist the ever-changing conditions the British weather throws at them without losing their immaculate appearance.

8 Legacy | PVCu Sliding Sash Windows





Legacy | uPVC Sliding Sash V