



IP67 Deck Light Instructions

- A UK standard waterproof 12V DC LED driver required - *not included*
- Ingress Protection Rating : IP67. Suitable for outdoor installation
- Compliance: The light fitting complies with all British and European requirements.
- Non Dimmable

IMPORTANT SAFETY ISSUES :

- Installation must be completed by a qualified electrician.
- Wrong installation or incorrect use with void any warranty.
- Modification of this product will void any warranty.
- Do not touch the lamp with bare hands, and ensure to let the lamp cool after use before touching.
- Do not install in chlorinated areas i.e. swimming pools.
- Do not install in saunas or steam rooms.

STEPS FOR INSTALLATION :

- Ensure all electric mains are disconnected before any installations.
- Drill cut- out in suitable location.
- Insert canister into the hole making sure that the top is level with floor height.
- Connect the cable to a 12V DC LED driver.
- Insert the light into canister.
- Apply silicone around edge of fitting to prevent any water from getting inside to electrical connections.
- All connections must be carried out carefully, inspect all contacts before switching back on electric circuit.



SKU - WLWIN100BRABRA, WLWIN100BR/

Product Name - Wink Deck Light


Voltage - 12V DC

Wattage - 1W

Colour Temperature - 3000K

Lumen - 105lm

Cut-out - 47mm with canister

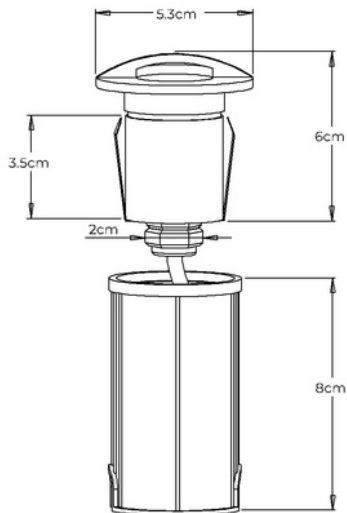

SKU - WLSEN100BRABRA, WLSEN100BRABNZ

Product Name - Sennen Deck Light


Voltage - 12V DC

Wattage - 1W

Colour Temperature - 3000K

Lumen - 105lm

Cut-out - 47mm with canister

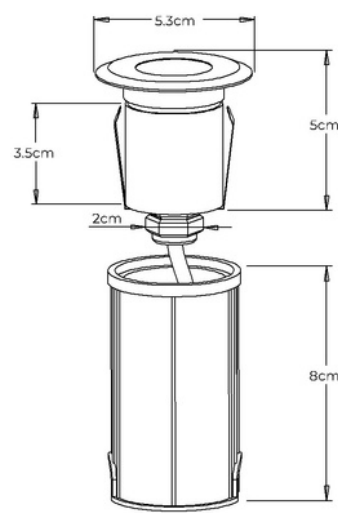

SKU - WLION100BRABRA, WLION100BRABNZ

Product Name - Iona Deck Light


Voltage - 12V DC

Wattage - 1W

Colour Temperature - 3000K

Lumen - 40lm

Cut-out - 47mm with canister

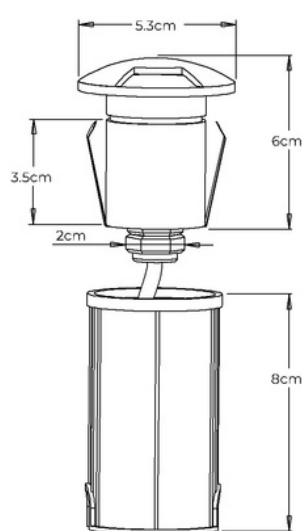

SKU - WLBLA100BRAAGD, WLBLA100BRABNZ

Product Name - Blades Deck Light

Voltage - 12V DC

Wattage - 1W

Colour Temperature - 3000K

Lumen - 30lm

Cut-out - 47mm with canister

