


## Specification for the first 5m length of track

- Soil stripped to a firm subsoil base.
   Terram membrane layer.
   Layer of compacted MOT type 1 for drainage.
   Layers of reducing size compacted with reducing
- 5. Minimum of 150mm MOT Type 16. 100mm binder course & 25mm surface layer

7. Macadam topping
Existing kerb to be lowered for the section 278 agreement

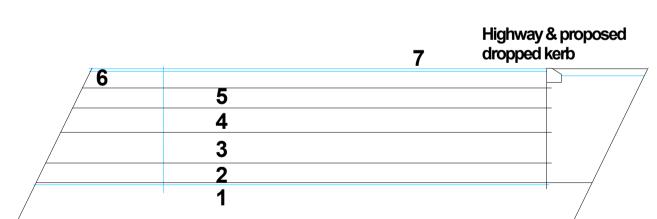

Peter Hitchen ^rchitects

Marathon House The Sidings Business Park Whalley, BB7 9SE

01254 823 885

www.peterhitchenarchitects.co.uk

NOTES:

GRASSCRETE TO BE USED FOR TRACK MATERIAL

Vo.	Description	Date

CLIENT:

**BARRY TURNER** 

PROJECT:

PROPOSED HOLIDAY LODGES AND ASSOCIATED WORKS

Checked by

SITE ENTRANCE

385 Project number 14/06/21 Date Drawn by DC

A204

Scale 1:100

PH

**A**1

Sheet size

1 SITE ENTRANCE DEATIL
1: 100