








## AXIblackpremium XXL HC 380 - 400 Wp

High performance solar module  
108 halfcell, monocrystalline

### The advantages:

-  15 years Manufacturer's warranty
-  High module performance through Half-Cut-technology and selected materials
-  Guaranteed positive power tolerance from 0-5 Wp by individual measurement
-  100% visual electroluminescence inspection in production
-  High stability due to innovative frame design
-  High quality junction box and connector systems
-  25 years Performance guarantee


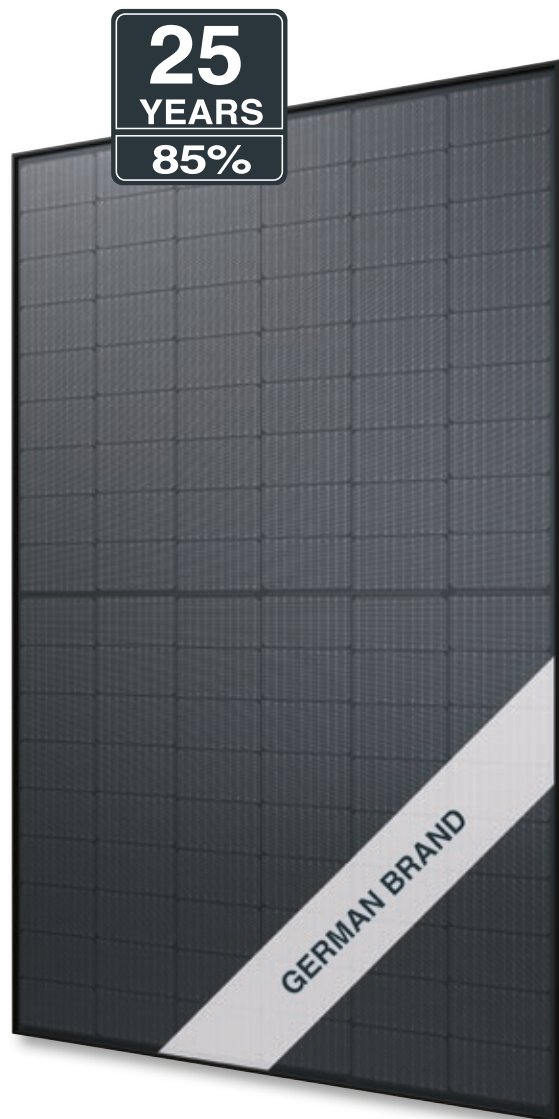


Fig. similar 08MHEN220801A

### Exclusive linear AXITEC high performance guarantee!

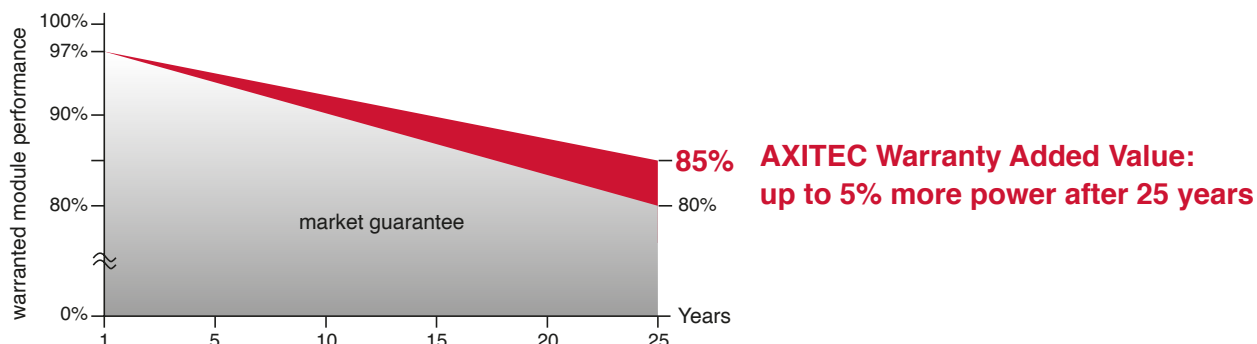

## AXIblackpremium XXL HC 380 - 400 Wp

**Electrical data** (at standard conditions (STC) irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P <sub>mpp</sub>	Nominal voltage U <sub>mpp</sub>	Nominal current I <sub>mpp</sub>	Short circuit current I <sub>sc</sub>	Open circuit voltage U <sub>oc</sub>	Module conversion efficiency
AC-380MH/108V	380 Wp	30.40 V	12.51 A	13.40 A	36.30 V	19.46 %
AC-385MH/108V	385 Wp	30.60 V	12.59 A	13.48 A	36.50 V	19.72 %
AC-390MH/108V	390 Wp	30.80 V	12.67 A	13.56 A	36.70 V	19.97 %
AC-395MH/108V	395 Wp	31.00 V	12.75 A	13.65 A	36.90 V	20.23 %
AC-400MH/108V	400 Wp	31.20 V	12.83 A	13.73 A	37.10 V	20.48 %

### Design

Frontside	3.2 mm hardened, low-reflection white glass
Cells	108 monocrystalline high efficiency cells
Backside	Composite film
Frame	30 mm black aluminium frame

### Mechanical data

L x W x H	1722 x 1134 x 30 mm
Weight	21.8 kg with frame

### Mechanical load

Design load (pressure/suction)	3600 Pa / 1600 Pa
Test load (pressure/suction)	5400 Pa / 2400 Pa

### Power connection

Socket	Protection Class IP68
Wire	approx. 1.2 m, 4 mm <sup>2</sup>
Plug-in system	Plug/socket IP68, Stäubli EVO2 / EVO2 pluggable


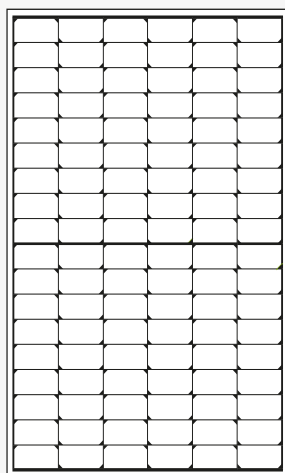


Fig. principle sketch

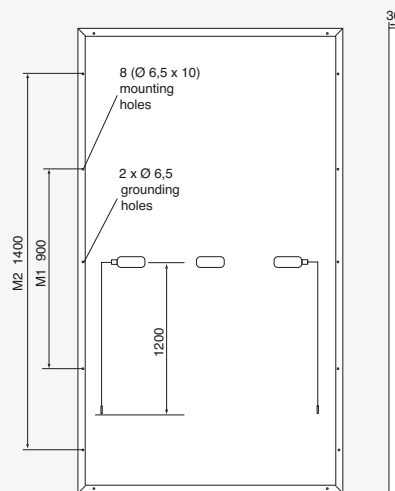

All dimensions in mm

### Limit values

System voltage	1500 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	25.0 A

### Permissible operating

temperature	-40°C to 85°C / -40F to 185F
-------------	------------------------------

(No external voltages greater than U<sub>oc</sub> may be applied to the module)

\* NOCT, irradiance 800 W/m<sup>2</sup>; AM 1,5; wind speed 1 m/s; Temperature 20°C

### Temperature coefficients

Voltage U <sub>oc</sub>	-0.28 %/K
Current I <sub>sc</sub>	0.045 %/K
Output P <sub>mpp</sub>	-0.35 %/K

### Low-light performance (Example for AC-400MH/108V)

I-U characteristic curve	Current I <sub>pp</sub>	Voltage U <sub>pp</sub>
200 W/m <sup>2</sup>	2.62 A	30.03 V
400 W/m <sup>2</sup>	5.29 A	30.37 V
600 W/m <sup>2</sup>	7.90 A	30.61 V
800 W/m <sup>2</sup>	10.45 A	30.87 V
1000 W/m <sup>2</sup>	12.83 A	31.20 V

### Packaging

Module pieces per pallet	35
Module pieces per HC-container	910

