PROPOSED MATERIALS

PROPOSED ROOF FINISH - BLUE SLATE

PROPOSED RENDER FINISH - K-REND, LIMESTONE WHITE

PROPOSED STONE FINISH - BUFF SANDSTONE ASHLAR

PROPOSED RAILING FINISH - BLACK METAL - PATTERN TBC

PROPOSED PAVING FINISH - BUFF SANDSTONE PROJECT PATTERN

PROPOSED WINDOW FINISH - BLACK ALUMINIUM EXTERIOR

PROPOSED DOOR FINISH - BLACK ALUMINIUM/UPVC EXTERIOR

PROPOSED CURTAIN WALLING FINISH - BLACK ALUMINIUM

1 PROPOSED - SE ELEVATION
1 : 100

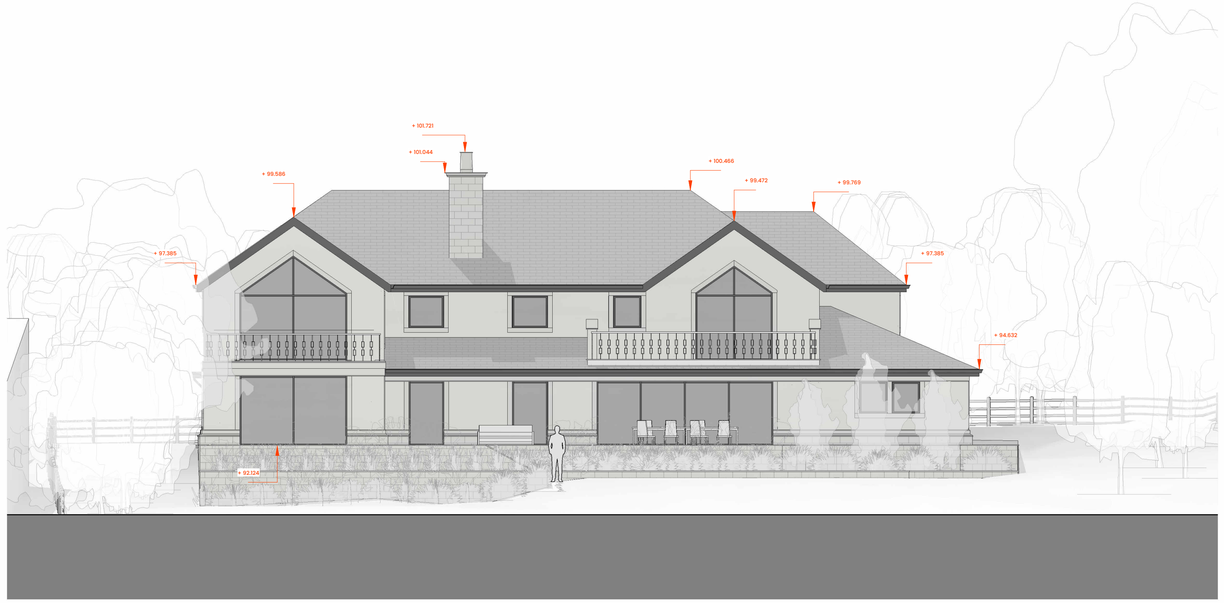

2 PROPOSED - NW ELEVATION
1 : 100

habitat architecture

M 07950 754 564
E info@habitat-architecture.co.uk
Clitheroe, Lancashire
BB7 2RW
www.habitat-architecture.co.uk

Project No. HA1085
BRIDGECROFT,
CLAYTON-LE-DALE, BB1 9EX

Client: IQBAL

Revisions:

Rev.	Remark	Date
A	HOUSE LEVEL REDUCED BY 1M AND MOVED CLOSER TO FRONT BOUNDARY	11/09/26

Notes:

The contractor shall be responsible for the design and specification of all temporary works necessary for the execution of the permanent works shown on the drawings.

The contractor shall be responsible for the design and specification of any temporary works necessary to maintain the stability of existing structures (both on and off site) unless noted otherwise.

All work and materials should comply with recent and up to date Health and Safety Legislation.

All works to be executed in accordance with the general requirements of BS 8000 with respect to workmanship and tolerances.

Refer to Structural Engineers drawings for full structural information.

Tanking and waterproofing (where required) to be to specialists design and detail. Specialist to provide insurance backed warranty for all works.

All dimensions are in mm unless stated otherwise.

Do not scale off these drawings, if in doubt, ask.

Where proprietary products are specified, if the component is sourced from an alternative manufacturer the contractor is responsible for ensuring the replacement is the equal and equivalent of the specified item.

For works in the vicinity of a party wall (including its foundation) or floor, the advice of a competent Party Wall Surveyor should be sought at the earliest opportunity to assess the specific requirements of the Party Wall Act in relation to the works.

All dimensions are in millimeters unlesswhere explicitly shown otherwise.

Any discrepancies or unforeseen obstructions are to be reported to the Designer.

The designer is in no way liable for work undertaken prior to full Planning Consent and/or Building Regulations Approval.

CDM caution

Document Date:
11/09/2026

Document Stage:
PLANNING

Drawn By: RH
Checked By: RH

Sheet Name:
PROPOSED ELEVATIONS

PL2.02_C

SCALE BAR 1:100
0 5 10 m

Sheet Size A1